

Sensors

Mating Cordsets





4 and 5-Pin *minifast*® Field Wireables

Application	Specifications	Female	Male
Mates with all 4-pin cordsets and receptacles	PG 9 cable gland, accepts 6-8 mm cable, Screw terminals Accepts up to 16 AWG conductors	B 4141-0/9	BS 4141-0/9
Mates with all 4-pin cordsets and receptacles	PG 13.5 cable gland, accepts 10-12 mm cable, Screw terminals Accepts up to 16 AWG conductors	B 4141-0/13.5	BS 4141-0/13.5

Application	Specifications	Female	Male
Mates with all 5-pin cordsets and receptacles	PG 9 cable gland, accepts 6-8 mm cable, Screw terminals Accepts up to 16 AWG conductors	B 4151-0/9	BS 4151-0/9
Mates with all 5-pin cordsets and receptacles	PG 13.5 cable gland, accepts 10-12 mm cable, Screw terminals Accepts up to 16 AWG conductors	B 4151-0/13.5	BS 4151-0/13.5
Mates with all 5-pin cordsets and receptacles	PG 16 cable gland, accepts 12-14 mm cable, Screw terminals Accepts up to 16 AWG conductors	B 4151-0/16	BS 4151-0/16

B 41*1-0/*

BS 41*1-0/*

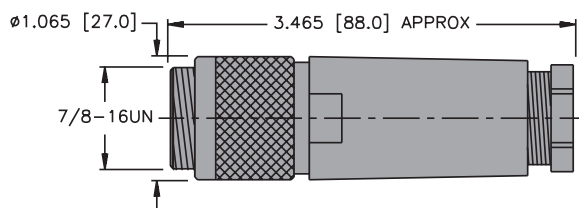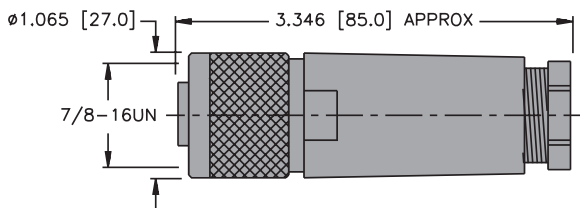


Female Connector

Male Connector

Pinouts

Female		Male	
4-Pin	5-Pin	4-Pin	5-Pin

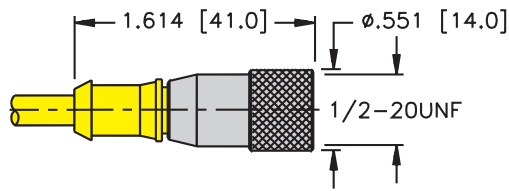

**3-Pin microfast® Cordset
Standard Plug Body
250 V, 4 A**

3-Pin

Application	Part Number	Cable Specifications	Pinout
3-Wire AC Sensors UL Recognized CSA Certified	KB 3T-*	3/22 AWG Yellow PVC 105°C 5.2 mm OD	1. GN 2. RD/BK 3. RD/WH
	KB 3T-*/S90	3/18 AWG Yellow PUR 80°C 5.7 mm OD	1. GN 2. RD/BK 3. RD/WH

Pinouts

