

[HOME](#)[LOG IN](#)[YOUR CART](#)[CHECK OUT](#)[SERVICE](#)[ABOUT US](#)

DIN_Receptacles

SEARCH
Advanced

New Item

SOS TurboFlare

Custom Cable Assemblies

Build Your Own Cable!

Cable Assemblies

Unshielded Jumpers

Shielded Patch Cords

Power_Cords

Mini_DIN

Coaxial

Audio_Extension

Connectors

RCA

UHF_Coaxial

Standard_MIC

Primary_Power_Receptacles

Miniature_Audio

Gold_Audio

DC_Power

Jacks and Plugs

Test_Probes

Phono_Plugs

Phono_Jacks

Phone_Plugs_Subminiature

Phone_Plugs_Standard

Phone_Plugs_Miniature

Phone_Jacks_Subminiature

Phone_Jacks_Standard


Phone_Jacks_Miniature

Phone_Jacks_In-Line

DIN_Receptacles

DIN_Plugs

Binding_Posts



"3 contacts @ 180°, lock ring,
panel mt."

Straight DIN Receptacle. Mates with JR-2731-3P.

JR 2732

282-7323


(S+)
282-7325
(5 PIN (180))

282-7326
(5 PIN (240))

THE TOTAL LENGTH (W/PIN) :




(E)

前部寸法 (Front Dimensions)

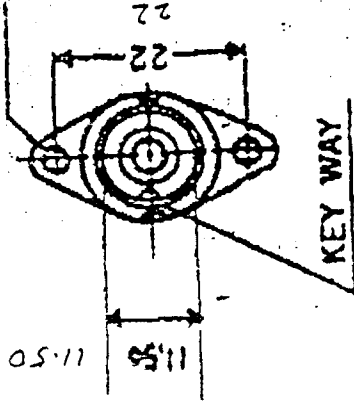


(一)

後部寸法 (Rear Dimensions)

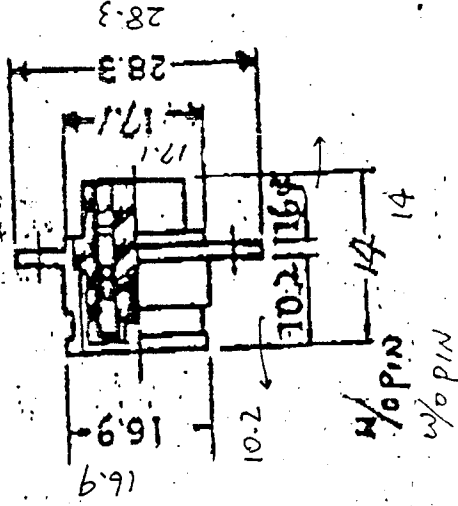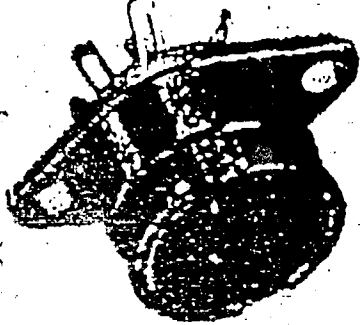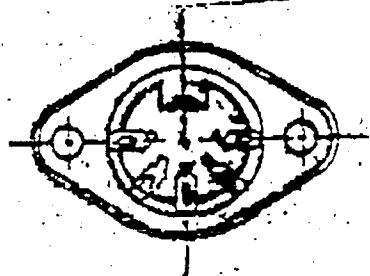

単位 = mm

UNIT = mm



	5PA (80)	5PB (240)	5PC (>60)	6P	7P	8PA (270)
45°		60°				

180° >40°