

IRFL9014PbF


HEXFET® Power MOSFET

- Surface Mount
- Available in Tape & Reel
- Dynamic dv/dt Rating
- Repetitive Avalanche Rated
- P-Channel
- Fast Switching
- Ease of Paralleling
- Lead-Free


Description

Third Generation HEXFETs from International Rectifier provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The SOT-223 package is designed for surface-mount using vapor phase, infra red, or wave soldering techniques. Its unique package design allows for easy automatic pick-and-place as with other SOT or SOIC packages but has the added advantage of improved thermal performance due to an enlarged tab for heatsinking. Power dissipation of greater than 1.25W is possible in a typical surface mount application.



| |
|---------------------------|
| $V_{DSS} = -60V$ |
| $R_{DS(on)} = 0.50\Omega$ |
| $I_D = -1.8A$ |



Absolute Maximum Ratings

| | Parameter | Max. | Units |
|---------------------------|--|-----------------------|-------|
| $I_D @ T_c = 25^\circ C$ | Continuous Drain Current, $V_{GS} @ -10 V$ | -1.8 | A |
| $I_D @ T_c = 100^\circ C$ | Continuous Drain Current, $V_{GS} @ -10 V$ | -1.1 | |
| I_{DM} | Pulsed Drain Current ① | -14 | |
| $P_D @ T_c = 25^\circ C$ | Power Dissipation | 3.1 | W |
| $P_D @ T_A = 25^\circ C$ | Power Dissipation (PCB Mount)** | 2.0 | |
| | Linear Derating Factor | 0.025 | W/°C |
| | Linear Derating Factor (PCB Mount)** | 0.017 | |
| V_{GS} | Gate-to-Source Voltage | -/+20 | V |
| E_{AS} | Single Pulse Avalanche Energy② | 140 | mJ |
| I_{AR} | Avalanche Current① | -1.8 | A |
| E_{AR} | Repetitive Avalanche Energy① | 0.31 | mJ |
| dv/dt | Peak Diode Recovery dv/dt ③ | -4.5 | V/ns |
| T_J, T_{STG} | Junction and Storage Temperature Range | -55 to + 150 | °C |
| | Soldewring Temperature, for 10 seconds | 300 (1.6mm from case) | |

Thermal Resistance

| | Parameter | Typ. | Max. | Units |
|-----------------|------------------------------------|------|------|-------|
| $R_{\theta JC}$ | Junction-to-PCB | — | 40 | °C/W |
| $R_{\theta JA}$ | Junction-to-Ambient. (PCB Mount)** | — | 60 | |


** When mounted on 1" SQUARE pcb (FR-4 or G-10 Material).

For recommended footprint and soldering techniques refer to application note #AN-994.


IRFL9014PbF

International
IR Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|---------------------------------|--------------------------------------|------|--------|------|---------------------|---|
| $V_{(BR)DSS}$ | Drain-to-Source Breakdown Voltage | -60 | — | — | V | $V_{GS} = 0V, I_D = 250\mu A$ |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient | — | -0.059 | — | V/ $^\circ\text{C}$ | Reference to $25^\circ\text{C}, I_D = 1\text{mA}$ |
| $R_{DS(on)}$ | Static Drain-to-Source On-Resistance | — | — | 0.50 | Ω | $V_{GS} = -10V, I_D = 1.1A$ ④ |
| $V_{GS(th)}$ | Gate Threshold Voltage | -2.0 | — | -4.0 | V | $V_{DS} = V_{GS}, I_D = 250\mu A$ |
| g_{fs} | Forward Transconductance | 1.3 | — | — | S | $V_{DS} = -25V, I_D = 1.1A$ ④ |
| I_{DSS} | Drain-to-Source Leakage Current | — | — | -100 | μA | $V_{DS} = -60V, V_{GS} = 0V$ |
| | | — | — | -500 | | $V_{DS} = -48V, V_{GS} = 0V, T_J = 125^\circ\text{C}$ |
| I_{GSS} | Gate-to-Source Forward Leakage | — | — | -100 | nA | $V_{GS} = -20V$ |
| | Gate-to-Source Reverse Leakage | — | — | 100 | | $V_{GS} = 20V$ |
| Q_g | Total Gate Charge | — | — | 12 | nC | $I_D = -6.7A$ |
| Q_{gs} | Gate-to-Source Charge | — | — | 3.8 | | $V_{DS} = -48V$ |
| Q_{gd} | Gate-to-Drain ("Miller") Charge | — | — | 5.1 | | $V_{GS} = -10V$, See Fig. 6 and 13 ④ |
| $t_{d(on)}$ | Turn-On Delay Time | — | 11 | — | ns | $V_{DD} = -30V$ $I_D = -6.7A$ $R_G = 24\ \Omega$ $R_D = 4.0\ \Omega$, See Fig. 10 ④ |
| t_r | Rise Time | — | 63 | — | | |
| $t_{d(off)}$ | Turn-Off Delay Time | — | 9.6 | — | | |
| t_f | Fall Time | — | 31 | — | | |
| L_D | Internal Drain Inductance | — | 4.0 | — | nH | Between lead, 6mm(0.25in) from package and center of die contact.  |
| L_S | Internal Source Inductance | — | 6.0 | — | | |
| C_{iss} | Input Capacitance | — | 270 | — | pF | $V_{GS} = 0V$ $V_{DS} = 25V$ $f = 1.0\text{MHz}$, See Fig. 5 |
| C_{oss} | Output Capacitance | — | 170 | — | | |
| C_{rss} | Reverse Transfer Capacitance | — | 31 | — | | |

Source-Drain Ratings and Characteristics


| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|----------|--|---|-------|------|---------|--|
| I_S | Continuous Source Current (Body Diode) | — | — | -1.8 | A | MOSFET symbol showing the integral reverse p-n junction diode.  |
| I_{SM} | Pulsed Source Current (Body Diode) ① | — | — | -14 | | |
| V_{SD} | Diode Forward Voltage | — | — | -5.5 | V | $T_J = 25^\circ\text{C}, I_S = -1.8A, V_{GS} = 0V$ ④ |
| t_{rr} | Reverse Recovery Time | — | 80 | 160 | ns | $T_J = 25^\circ\text{C}, I_F = -6.7A$ |
| Q_{rr} | Reverse Recovery Charge | — | 0.096 | 0.19 | μC | $di/dt = 100A/\mu s$ ④ |
| t_{on} | Forward Turn-On Time | Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$) | | | | |

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)
- ② $V_{DD} = -25V$, starting $T_J = 25^\circ\text{C}$, $L = 50\text{mH}$
 $R_G = 25\ \Omega$, $I_{AS} = -1.8A$. (See Figure 12)
- ③ $I_{SD} \leq -6.7A$, $di/dt \leq 90A/\mu s$, $V_{DD} \leq V_{(BR)DSS}$,
 $T_J \leq 150^\circ\text{C}$
- ④ Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$.

SOT-223 (TO-261AA) Package Outline


Dimensions are shown in millimeters (inches)

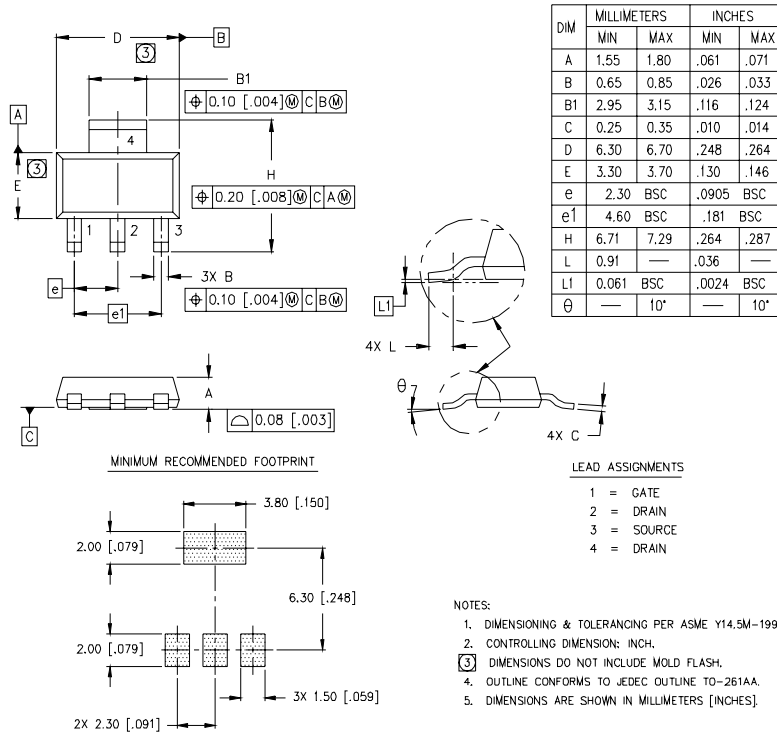

SOT-223 (TO-261AA) Part Marking Information

HEXFET PRODUCT MARKING


EXAMPLE: THIS IS AN IRFL014

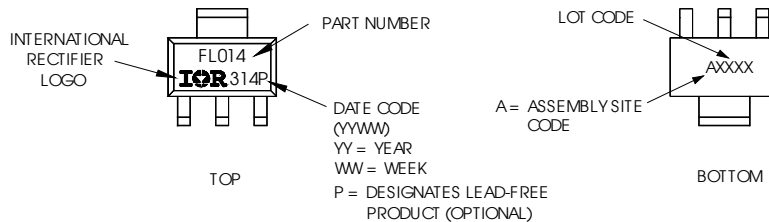

IRFL9014PbF


SOT-223 (TO-261AA) Tape & Reel Information

Dimensions are shown in millimeters (inches)

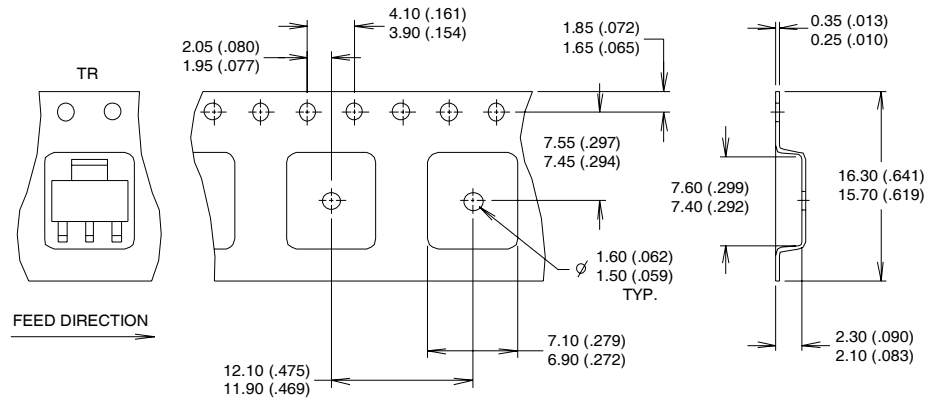

NOTES :

1. CONTROLLING DIMENSION: MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.
3. EACH $\varnothing 330.00$ (13.00) REEL CONTAINS 2,500 DEVICES.

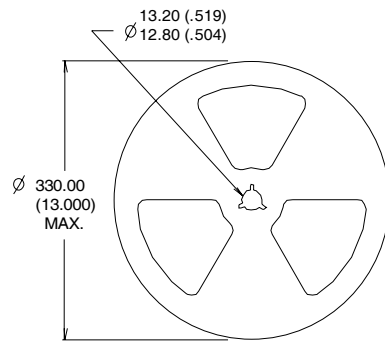

NOTES :

1. OUTLINE COMFORMS TO EIA-418-1.
2. CONTROLLING DIMENSION: MILLIMETER..
- ③ DIMENSION MEASURED @ HUB.
- ④ INCLUDES FLANGE DISTORTION @ OUTER EDGE.

