


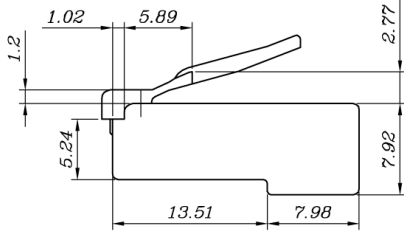




更改 REV	出图日期 DATE	设变内容 MODIFICATION	修 改 DRAWN
	11/05/05		



Round



**SPECIFICATIONS**

- ELECTRICAL:**  
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.  
 DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.  
 INSULATION RESISTANCE: 100 M Ω .  
 TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
- MECHANICAL:**  
 CABLE-TO-PLUG TENSILE STRENGTH : 19.6N/PCS MIN.  
 DURABILITY : 200 MATING CYCLES.
- MATERIAL & FINISH:**  
 HOUSING : POLYCARBONATE, UL94V-0 OR UL94V-2.  
 COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.  
 CONTACT BLADE: PHOSPHOR BRONZE.  
 CONDUCTOR : SOLID WIRE , 24AWG, 26 AWG.  
 GOLD PLATING: 50u"

**BLADE:**

Type	B
Drawing	
Mark	

		<b>Quest Technology International, Inc.</b> 11200 NW 138th St. Medley, FL 33178	
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材 质 MATERIAL PC	图 号 DWG NO. NMP-8225
.X±0.20	.X°±5°	名 称 DESCRIPTION Cat5E RJ-45 Modular Plug, 8p8c, Solid Conductor, Round Jacket	
.XX±0.10	.XX°±2°	审 核 APPROVAL Lucia	核 对 CHECKED 制 图 DRAWN 比例 SCALE 2/1 张数 SHEET 1/1 更改 REV A

1 2 3 4 5 6 7 ST-DR-009A