

CURRENT MONITOR RELAYS

AC PLUG-IN CO SERIES OVERCURRENT



- ◆ Monitors AC single phase currents for overcurrent conditions
- ◆ Three separate current monitoring ranges covering 0.1 - 10 amperes
- ◆ External CT can be used to extend ranges
- ◆ Adjustable Pick-up Setting with either Fixed or Adjustable Drop-out Setting
- ◆ Adjustable time delay of 0.1-10 seconds on pick-up
- ◆ LED indicates output relay status
- ◆ Choice of compact 8 Pin SPDT or 11 Pin DPDT plug-in case


- ◆ 10A output contacts



(with appropriate socket)

The CO Series is used to detect an overcurrent condition. The pick-up current setting is user-adjustable within one of three ranges as shown in the Product Selection Table below. An external current transformer can be used to extend the range beyond 10 amperes.

Choose between a fixed drop-out current setting at 95% of the selected pick-up setting or an adjustable drop-out setting of 50-95% of the selected pick-up setting. The relay will energize when the monitored AC current is above the pick-up setting for a period longer than the adjustable time delay of 0.1-10 seconds. This delay prevents nuisance tripping caused by inrush currents. It will de-energize when the monitored AC current is below the drop-out setting.

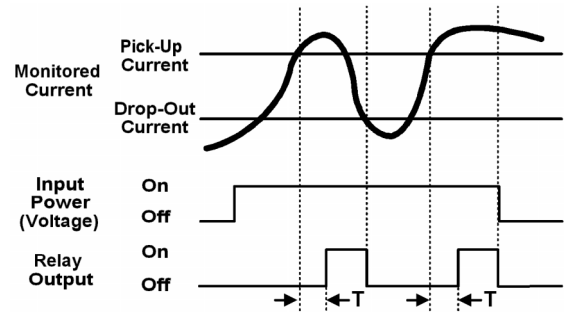

8 Pin SPDT Plug-in

Pick-up Setting	Drop-Out Setting	Input Voltage	Current Range Monitored	Product Number	Wiring/Socket
Adjustable	Fixed (At 95% of Pick-Up)	24V AC	0.1 - 1A 0.5 - 5A 1 - 10A	COP01A68 COP05A68 COP10A68	<p>Diagram 21</p>
		120V AC	0.1 - 1A 0.5 - 5A 1 - 10A	COP01A62 COP05A62 COP10A62	
Adjustable	Adjustable (From 50-95% of Pick-Up)	24V AC	0.1 - 1A 0.5 - 5A 1 - 10A	COKP01A68 COKP05A68 COKP10A68	
		120V AC	0.1 - 1A 0.5 - 5A 1 - 10A	COKP01A62 COKP05A62 COKP10A62	

11 Pin DPDT Plug-in

Pick-up Setting	Drop-Out Setting	Input Voltage	Current Range Monitored	Product Number	Wiring/Socket
Adjustable	Fixed (At 95% of Pick-Up)	24V AC	0.1 - 1A 0.5 - 5A 1 - 10A	COP01A28 COP05A28 COP10A28	<p>Diagram 22</p>
		120VAC	0.1 - 1A 0.5 - 5A 1 - 10A	COP01A22 COP05A22 COP10A22	
Adjustable	Adjustable (From 50-95% of Pick-Up)	24V AC	0.1 - 1A 0.5 - 5A 1 - 10A	COKP01A28 COKP05A28 COKP10A28	
		120V AC	0.1 - 1A 0.5 - 5A 1 - 10A	COKP01A22 COKP05A22 COKP10A22	



CURRENT MONITOR RELAYS

AC PLUG-IN CO SERIES OVERCURRENT APPLICATION DATA & DIMENSIONS

APPLICATION DATA

Input Voltage Tolerance:

AC Operation: +10/-15% of nominal at 50/60 Hz.

Load (Burden):

Less than 5VA

Current Settings:

Pick-up: Adjustable throughout current range monitored
Drop-out: Fixed at 95% of pick-up setting (COP Series); or
Adjustable from 50-95% of pick-up setting (COKP Series)

Temperature:

-28° to 55° C (-20° to 131° F)

Response Times:

Pick-up: Adjustable 0.1-10 seconds

Drop-out: Fixed 100ms

Output Contacts:

10A Resistive @ 240V AC/30V DC, 1/2HP @ 240V AC (N.O.),
1/3HP @ 240V AC (N.C.)

Life:

Mechanical: 10,000,000 operations

Full Load: 100,000 operations

Indicator LED: Green when Input Voltage is applied;
Red Flashing when in time delay; and Red Steady when
Relay is energized.

Reset: Automatic. Contact Macromatic for information
on a product with a latching function--the relay remains
energized even after the current drops below the drop-
out setting until a remote N.C. button is opened.

Mounting:

Requires an 8 or 11 pin octal socket--see page 16.

Approvals:




File #E109466



with appropriate
Macromatic socket
File #E109466

DIMENSIONS

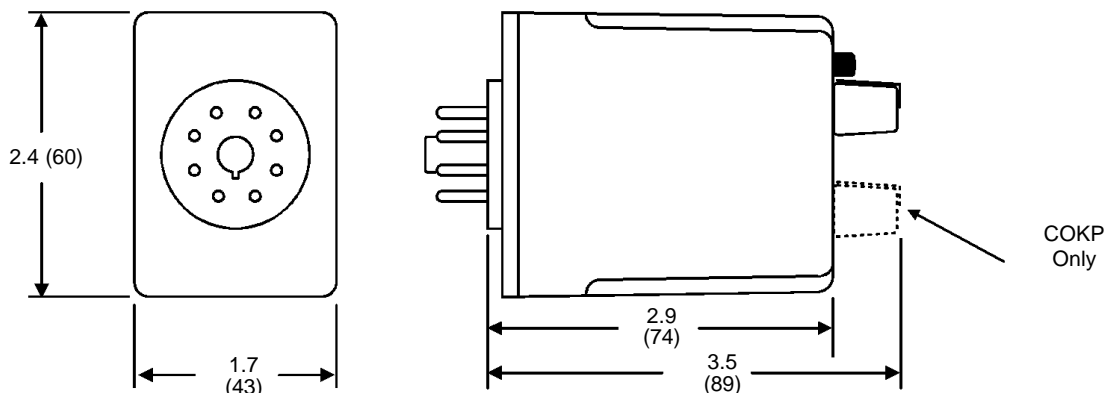

All dimensions are inches
(millimeters)