



**Screw Connectors for Printed Circuit Boards**

**TYPE 141-A-121**

0.2 in. spacing - 2 and 3 poles



Series	Download PDF	3D Model	Can plug with	How to order	Color specifications	Print
--------	--------------	----------	---------------	--------------	----------------------	-------

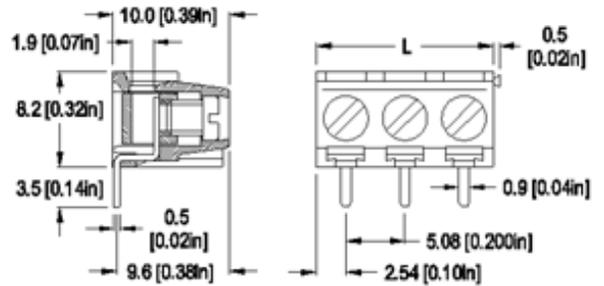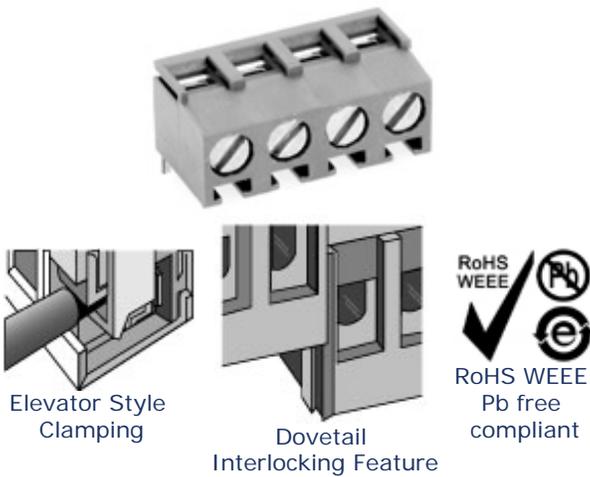

Dimensions: mm (in.)

Length of Connector (L)  
L = No. of Poles x Center to Center Spacing

**When locating connector, allow 0.5 mm clearance around it for process-induced variations.**

**Description**

- Dovetail version
- Wire entrance perpendicular to PC Board
- Elevator-style clamping mechanism
- The 2 and 3 poles units can be factory, field or distributor assembled to almost any number of poles.

**Technical Data**

**Center to Center Spacing:** 5.08 mm (0.200 in.)  
**Nominal Cross Section:** 1.5 mm<sup>2</sup> (2325 mils<sup>2</sup>)  
**Wire Stripping Length:** 6 mm (0.25 in.)  
**Recommended Hole Diameter in PC Board:** 1.2 mm (0.047 in.)

**Approval Information**

UL File No.E69841   
 CSA File No.LR24322

Rating	Current(A)	Voltage(V)	Application group	AWG
UL	10	300	B,C,D	30-14
CSA	15	300	B	30-14

\* UL: 20A range for factory wiring only.

**Screw Tightening Torque:**

UL: 4.5 lbf·in  
 CSA: 0.51 Nm

**Rated Impulse Withstand Voltage:** 2500 V

**Material**

Top of page

**Molding:** Polyamide, self extinguishing UL 94, V-0, color grey

**Temperature limits:**

**Short Time:** 140°C (284°F)

**Continuous:** RTI 105°C (221°F)

**Low Limit:** -40°C (-40°F)

**Comparative Tracking Index:** CTI > 600

**Oxygen Index Rating:** 33%

**Terminal Body:** Nickel plated copper alloy

**Solder Pin and Pressure Plate:** Tin plated copper alloy

**Screw:** M3, Slotted head, zinc plated blue passivated, steel substrate

**Solder Pin:** 0.9 mm x 0.5 mm (0.04 in. x 0.02 in.),

## How to order

**Item** 141-A-121

### Options

CN: Consecutive Numbering (hot stamped numbers)

SM: Special Marking (please provide sketch)

BS: Copper Alloy Screw

G05: Gold Plating (5 micro inches)

G30: Gold Plating (30 micro inches)

S30: Silver Plating (30 micro inches)

**Note:** Plated components: solder pin and pressure plate

**Ordering Note:** To order factory assembled specify the number of poles required.

141-A-121/

POLES:  
02 and 03

**Request sample**

**Request quote**

Quantity

### Accessories

[BST Self Adhesive Marking Strips.](#)

[Consecutively numbered.](#)

[Jumper, Type 970-J1.](#)

**Add to shopping cart**