All

Search

Shop | Catalog Quick Order | Free Catalog | Custom / OEM |

About Us

Contact Us

Free eNewsletter

Enter your E-mail



Shop By Type

Cable Assemblies

Adapters

Rack Panels

Bulk Cable

Tools

Switch Boxes

Network Cards

Hubs & Switches Converters & Transceivers

KVM Switches

Antennas

Overstock/Sale Items Top 10 Products

Shop By Category

IEEE-488 GPIB

Coaxial

Monitor, Video

Fiber Optic

D-Subminiature

Modular

USB, DIN, Firewire, SCSI, and Others

Wireless Infrastructure

Weatherproof Enclosures

Networking and Other Equipment

Product Wizards

You Are Here: Home > D-Subminiature > Adapters, Couplers, Splitters > Gender Changers > DGBH > DGBH44M

Slimline Gender Changer, HD44 Male / Male

Features for this product

- Wired straight through to pass signals through a panel or enclosure
- Fully shielded to protect against EMI (electromagnetic interference)
- Gold plated contacts provide reliable connections with repeated mating cycles
- UL grade 94V-0 connector insulator satisfies flammability requirements
- Available in all high density D-sub connector sizes; male/male or female/female genders



Dual-purpose slimline high density gender changers allow mismatched D-sub connectors to mate and are panel mountable to pass cables through a bulkhead (See panel mount tips). The low profile design reduces leverage

10-24 25-99 100-249 250-499 Item # Description

⊘ROHS Slimline Gender Changer/Adapters - Reduce Port Receptacle Strain Up To 90%

DGB9F Slimline Gender Changer, DB9 Female / Female Slimline Gender Changer, DB9 Male / Male DGB9 DGB15 Slimline Gender Changer, DB15 Female / Female **DGB15** Slimline Gender Changer, DB15 Male / Male DGB25 Slimline Gender Changer, DB25 Female / Female DGB25 Slimline Gender Changer, DB25 Male / Male Slimline Gender Changer, DB37 Female / Female DGB37 DGB37 Slimline Gender Changer, DB37 Male / Male Slimline Gender Changer, DB50 Female / Female **DGB50** Slimline Gender Changer, DB50 Male / Male

Rohs Socket Saver Adapters - Extend D-Sub Connector Usage and Avoid Major Repairs

Slimline Socket Saver, DB9 Male / Female DGB15M Slimline Socket Saver, DB15 Male / Female DGB25M Slimline Socket Saver, DB25 Male / Female Slimline Socket Saver, DB37 Male / Female DGB37M DGB50M Slimline Socket Saver, DB50 Male / Female

№ RoHS Hi-Density Slimline Gender Changers - Same Small Size for High Density D-Subs

Slimline Gender Changer, HD15 Female / Female DGBH15F DGBH15 Slimline Gender Changer, HD15 Male / Male Slimline Gender Changer, HD26 Female / Female DGBH26 Slimline Gender Changer, HD26 Male / Male DGBH44F Slimline Gender Changer, HD44 Female / Female Slimline Gender Changer, HD44 Male / Male DGBH44 DGBH62F Slimline Gender Changer, HD62 Female / Female Slimline Gender Changer, HD62 Male / Male Slimline Gender Changer, HD78 Female / Female DGBH78F DGBH78 Slimline Gender Changer, HD78 Male / Male

Policy Hi-Density Socket Saver Adapters - Great for Preventing Wear on High Density Connectors

DGBH15MF Slimline Socket Saver, HD15 Male / Female DGBH26MF Slimline Socket Saver, HD26 Male / Female DGBH44MF Slimline Socket Saver, HD44 Male / Female DGBH62MF Slimline Socket Saver, HD62 Male / Female DGBH78MF Slimline Socket Saver, HD78 Male / Female

Professional Slimline Gender Changer/Adapters - with Pin 9 Missing for Legacy VGA Cable Applications

DGBV15F Slimline Gender Changer, HD15 Female / Female Slimline Gender Changer, HD15 Male / Male DGBV15MF Slimline Socket Saver, HD15 Male / Female DMA100M I PS-2 Monitor Adapter, DB9 Male / HD15 Male

⊘ROHS Slimline Gender Changers and Socket Saver - Typical Centronic 36 and SCSI/Telco 50

Slimline Centronic Gender Changer, 36 Pin Female / Female DGC36 Slimline Centronic Gender Changer, 36 Pin Male / Male Slimline SCSI Gender Changer, 50 Pin Female / Female DGC50 Slimline SCSI Gender Changer, 50 Pin Male / Male DGC50M Slimline SCSI Socket Saver, 50 Pin Male / Female

☑ ROHS DB9, HD15 and DB25 Low Profile Right Angle Adapters - Molded and Fully Shielded

Connecting cables in tight spaces can be a problem in many applications. These low profile adapters solve this problem by allowing cables to be connected at a 90 degree angle. Two versions are available for each connector size allowing for cables to exit in opposite directions. Adapters are male to female, fully shielded and are overmolded with gray PVC. Mating hardware is reversible allowing for use in virtually any application.

DG909MF1 Low Profile Right Angle Adapter, DB9 Male / Female, Cable Exit 1 Low Profile Right Angle Adapter, DB9 Male / Female, Cable Exit 2



How to panel mount adapters




Remove standard hardware provided with adapter. Mount adapter from rear of panel.




2. Secure with jackscrew SDG450XS (purchased separately) from front of panel.



3. Thread hex nut SDHS (purchased separately) onto exposed threads of SDG450XS.



Note: Maximum recommended panel thickness is 0.062". Dimensions in excess of 0.062" can limit proper cable mating due to hex nut protrusion. Panels that exceed 0.062" can be milled down to the recommended thickness in the area around the adapter.

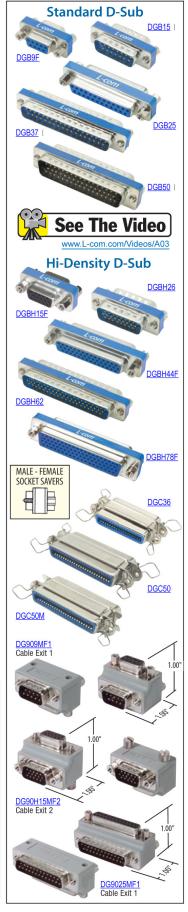

Shop at L-com.com or call 1-800-343-1455

E-mail: sales@L-com.com Fax: 978-689-9484