

N-CHANNEL SILICON POWER MOSFET

FAP-2S Series


■ Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

■ Applications

- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

■ Outline Drawings

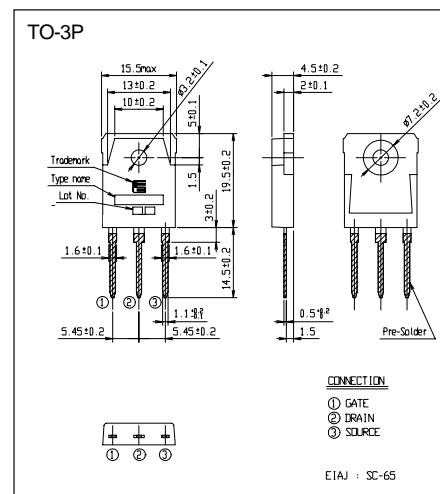


■ Maximum ratings and characteristic Absolute maximum ratings

● (T_c=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V _{DS}	500	V
Continuous drain current	I _D	±20	A
Pulsed drain current	I _{D(puls)}	±80	A
Gate-source voltage	V _{GS}	±30	V
Repetitive or non-repetitive	I _{AR} *2	20	A
Maximum Avalanche Energy	E _{AS} *1	761	mJ
Max. power dissipation	P _D	150	W
Operating and storage temperature range	T _{ch}	+150	°C
	T _{stg}	-55 to +150	°C

*1 L=3.49mH, V_{CC}=50V *2 T_{ch}≤150°C

■ Equivalent circuit schematic

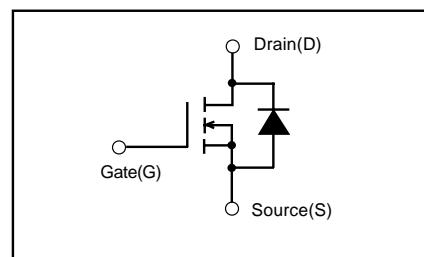● Electrical characteristics (T_c=25°C unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V _{(BR)DSS}	I _D =1mA V _{GS} =0V	500			V
Gate threshold voltage	V _{GS(th)}	I _D =1mA V _{DS} =V _{GS}	2.5	3.0	3.5	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =500V V _{GS} =0V	10	500	500	μA
		T _{ch} =25°C T _{ch} =125°C	0.2	1.0	1.0	mA
Gate-source leakage current	I _{GSS}	V _{GS} =±30V V _{DS} =0V	10	100	100	nA
Drain-source on-state resistance	R _{DS(on)}	I _D =10A V _{GS} =10V	0.33	0.38	0.38	Ω
Forward transconductance	g _{fs}	I _D =10A V _{DS} =25V	7.5	15.0	15.0	S
Input capacitance	C _{iss}	V _{DS} =25V	2200	3300		pF
Output capacitance	C _{oss}	V _{GS} =0V	330	500		
Reverse transfer capacitance	C _{rss}	f=1MHz	140	210		
Turn-on time t _{on}	t _{d(on)}	V _{CC} =300V I _D =20A	20	30		ns
	t _r	V _{GS} =10V	130	200		
Turn-off time t _{off}	t _{d(off)}	R _{GS} =10Ω	160	240		
	t _f		105	160		
Avalanche capability	I _{AV}	L=3.49 mH T _{ch} =25°C	20			A
Diode forward on-voltage	V _{SD}	I _F =2xI _{DR} V _{GS} =0V T _{ch} =25°C		1.1	1.65	V
Reverse recovery time	t _{rr}	I _F =I _{DR} V _{GS} =0V		650		ns
		-di/dt=100A/μs T _{ch} =25°C		10.0		μC

● Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R _{th(ch-c)}	channel to case			0.83	°C/W
	R _{th(ch-a)}	channel to ambient			35.0	°C/W