



NAVIGATE THE CATALOG BY SECTION

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19




LAPP ONLINE CATALOG

EPIC® Pin & Sleeve Connectors

20 Amp: North American Version

MULTIMAX Male Plugs

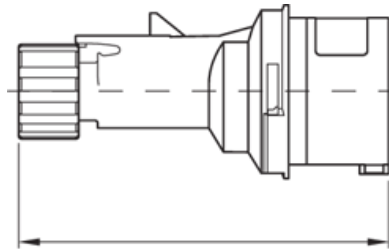

3 wires= 127 mm (5")
 4 wires= 134 mm (5.28")
 5 wires= 142 mm (5.59")

TECHNICAL DATA

Impact Resistance:	8J
Ambient Temperature:	-25°C to 70°C
Flame Resistance:	
➤ Glow Wire Test: Enclosure:	850°C
➤ Glow Wire Test: Contact Enclosure:	850°C
➤ Self-Extinguishing: Enclosure:	UL94-V2

► Self-Extinguishing: Contact Carrier:

UL94-V2

PART NUMBERS

Part Number	Voltage	# of Wires	# of Poles	Ground-Clock Position
700124FX	125	3	1+N+PE	4
700126FX	250	3	2+PE	6
700127FX	480	3	2+PE	7
700123FX	250 DC	3	2+PE	3
701132FX	125/250	4	2+N+PE	12
700139FX	3Ø250	4	3+PE	9
700137FX	3Ø480	4	3+PE	7
700135FX	3Ø600	4	3+PE	5
700149FX	3ØY 120/208	5	3+N+PE	9
700147FX	3ØY 277/480	5	3+N+PE	7
700145FX	3ØY 347/600	5	3+N+PE	5
700142FX	50-250 (500 Hz)	5	3+N+PE	2

MATING COMPONENTS

- [MULTIMAX Female Connector with Cable Sleeve, IP 44](#)
- [CEE Straight Female Panel Mount Receptacle, IP 44](#)
- [CEE 75° Female Internal Surface Mount Receptacle, IP 44](#)



DOWNLOAD PDF CATALOG PAGE

LAPP USA • LAPP CANADA • LAPP MEXICO
Headquarters: 29 Hanover Road, Florham Park, NJ 07932
800-774-3539 • FAX: 973-660-9330 • sales@lappusa.com