

## 2.4 GHz 14 dBi Flat Patch Wireless LAN Antenna Model: HG2414P-NF

### Applications and Features

- Applications:**
- 2.4 GHz ISM Band
  - IEEE 802.11b, 802.11g, 802.11n Wireless LAN
  - Bluetooth®
  - Public Wireless Hotspot
  - WiFi
  - Wireless Video Systems
- Features:**
- Superior performance
  - Light weight
  - Durable UV-stable, UL flame rated radome
  - Low loss solid brass elements
  - DC Short lightning protection
  - 12 inch coax lead
  - Can be installed for either vertical or horizontal polarization
  - Optional mounting brackets available



### Description

#### Directional Flat Patch Antenna

The HG2414P-NF is a high performance directional flat patch WiFi antenna suitable for indoor and outdoor applications in the 2.4GHz ISM band, including IEEE 802.11b, 802.11g and 802.11n wireless LANs, Bluetooth®, and public wireless hotspots. This WiFi antenna is lightweight and features an aesthetic UV-stable, UL flame rated white plastic radome which can also be painted to match the room or building structure. The HG2414P-NF can be installed for horizontal or vertical polarization. It can be wall or ceiling mounted, as well as mast-mounted using U-bolts.

### Specifications


#### Electrical Specifications

<b>Frequency</b>	2400-2500 MHz
<b>Gain</b>	14 dBi
<b>Horizontal Beam Width</b>	30 degrees
<b>Vertical Beam Width</b>	30 degrees
<b>Impedance</b>	50 Ohm
<b>Max. Input Power</b>	25 Watts
<b>VSWR</b>	< 1.5:1 avg.
<b>Lightning Protection</b>	DC Short


### Mechanical Specifications

<b>Weight</b>	.95 lbs. (.43 Kg)
<b>Dimensions</b>	8.5 x 8.5 x 1 (inches) 216 x 216 x 26 (mm)
<b>Radome Material</b>	UV-inhibited Polymer
<b>Flame Rating</b>	UL 94HB
<b>Mounting</b>	Four ¼ in. (6.3 mm) Holes
<b>Polarization</b>	Horizontal or Vertical
<b>Operating Temperature</b>	-40° C to to 85° C (-40° F to 185° F)
<b>Wind Survival</b>	>150 MPH (241 KPH)

### RF Antenna Gain Patterns

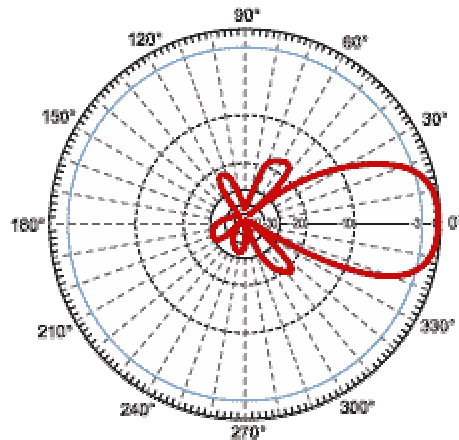

**Vertical**

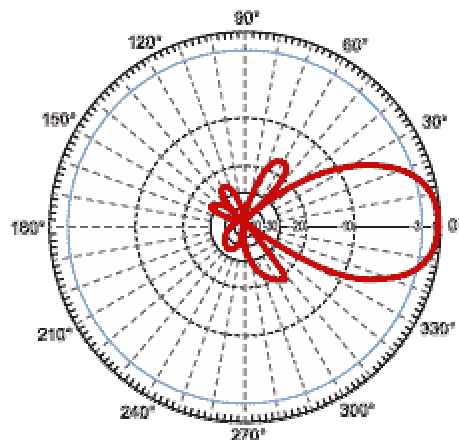

**Horizontal**

### Guaranteed Quality



This product is designed and manufactured by HyperLink Technologies in the U.S.A. and is backed by Hyperlink's Limited Warranty.



e-mail: [sales@hyperlinktech.com](mailto:sales@hyperlinktech.com) • tel: 561-995-2256 • fax: 561-995-2432  
web: [www.hyperlinktech.com](http://www.hyperlinktech.com) • 1201 Clint Moore Road • Boca Raton FL 33487  
[www.L-com.com](http://www.L-com.com) Call toll free 1-800-341-5266 [sales@L-com.com](mailto:sales@L-com.com)