

10-Wire eurofast® Cordsets, Standard Plug Body

- Straight Female Connector
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection
- 60 VAC/75 VDC, 2 A




Housing Style	Part Number	Cable	Features	Pinout
<p>RK ..**</p>	RK 10T-*	AWM PVC Grey 10x24 AWG 105°C 6 mm OD Cable #RF51004- [†] M [†]	<i>flexlife</i> ®	
	RK 10T-*/S90	AWM PUR Grey 10x24 AWG 105°C 6 mm OD Cable #RF51005- [†] M [†]	<i>Cut/Abrasion Immune</i>	
	RK 10T-*/S618	AWM PVC Black 10x24 AWG Foil/Drain 105°C 7 mm OD Cable #RF51076- [†] M [†]	<i>RFI/EMI Shielding</i>	
<p>RKK ..**</p>				
<p>RKV ..**</p>				


* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

** Standard coupling nut material is nickel plated brass "RK .."; "RKK .." indicates nylon and "RKV .." indicates 316 stainless steel.

[†] See Section N for *reelfast*® cable information.

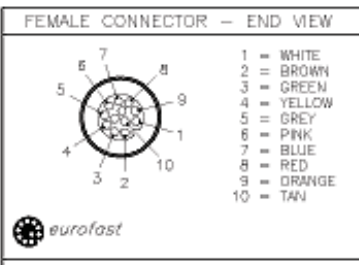

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PUR/BLACK
MOLDED HEAD MATERIAL/COLOR	THERMOPLASTIC PUR/YELLOW
CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS
COUPLING NUT MATERIAL/PLATING	NICKEL-PLATED BRASS
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 VAC/75 VDC
OUTER CABLE JACKET MATERIAL/COLOR	OIL RESISTANT PVC/GREY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	10x24 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
SPACINGS	to VDE 0110 GROUP C

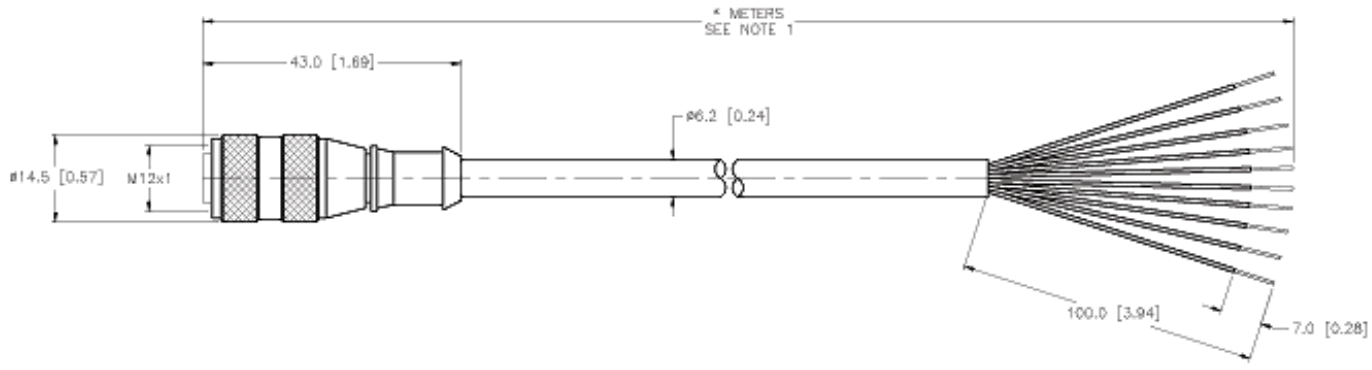

CABLE LENGTH	TOLENANCE
ALL LENGTHS	+ .4% (OR 50mm) OF LENGTH - .0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
GTTP LENGTH	TOLENANCE
0-1mm	±0.2mm
1-25mm	±1.0mm
25-45mm	±2.0mm
50-85mm	±3.0mm
75-105mm	±4.0mm
OVER 105mm	±5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1,* DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls	
MATERIAL SEE SPECIFICATIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED 0.5 TO 6 ±0.1 6 TO 30 ±0.2 30 TO 200 ±0.3 OVER 200 ±0.4 ANGLES ±1° ALL INCH DIMENSIONS ARE REFERENCE ONLY	DWPT RDS USGR	DATE 10/24/03 SCALE 1=1.0	DESCRIPTION RK 10T-*
FRESH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. REV A
A DRAWING RELEASE	RDS 10/24/03	DO NOT SCALE THIS DRAWING		FILE: EURO-C\7770D2668 SHEET 1 OF 1