

Part Number **PRX+3800** Contact Form **B** Switch Configuratio **SPST** Rev. **A**

Ultra-Small Form B Cylindrical Proximity Sensor


Features	Advantages
<ul style="list-style-type: none"> Hermetically sealed contacts Based upon the HSR-502R High temp black housing material 	<ul style="list-style-type: none"> Extended operations in extreme environments Not ESD sensitive Custom sensitivity and configurations available Proven reliability with tens of millions switches in service

Electrical Specifications

Power		Watts - maximum	2
Voltage	Switching	VDC - maximum	30
	Breakdown	VDC - minimum	175
Current	Switching	Amp - maximum	0.1
	Carry	Amp - maximum	1.2
Resistance	Initial Contact Resistance	Ohm - maximum	.50
	Insulation Resistance	Ohm - minimum	1 E10
Capacitance	Contact	pF - typical	1.4
Temperature	Operating	°C - maximum	+105
	Storage	°C	-40 to +105

Physical/Operational Specifications

Housing Volume	Excluding Connection	CC - nominal	0.151
External Connection	30 AWG	UL1371	Teflon
Must Operate	Distance	Inches	0.250
Must Release	Distance	Inches	0.500
Operate Time	Including Bounce	mSeconds - maximum	0.3
Release Time	Including Bounce	mSeconds - maximum	0.3

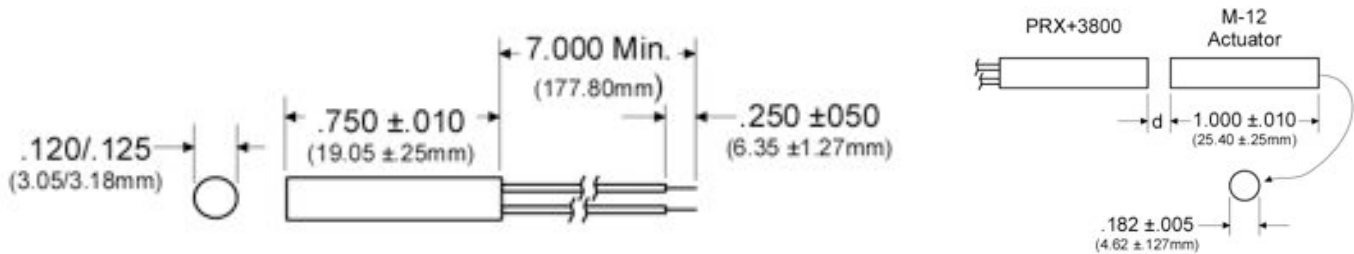

Notes:

- Specifications are not constant across entire magnetic range.
- Customer must exercise care in handling and mounting to prevent damage to internal components and subsequent changes to sensor performance.
- For information about performance, custom configuration (i.e. wire length or color; connectors; operational variation), or packaging contact our Sales department.
- Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.