



Part Number
Key Word



Site Search

[TOP](#)

[NEWS RELEASE](#)

[CONNECTORSEARCH](#)

[CATALOG](#)

[SAMPLE](#)

[STOCK CHECK](#)

[TOP](#) > [FI-W41S](#)

Product List

Product Name	FI-W41S
Series Name	FI Series
Contact spacing (mm)	1.25
Number of rows	2
Number of Contacts	41
Lead free	-
Connector type	Cable side Plug housing
PCB mounting type	-
PCB mounting method	-
Wire termination method	Crimp
Applicable wire	Discrete wire
Finish of contact in connecting area	-

Finish of contact in terminal area	-
Finish of contact in PCB mounting area	-
Material of housing	Glass-filled Nylon (UL94V-0)
PCB side connector styles	-
PCB mounted height (mm)	-
Electro magnetic shield function	No
Remarks	
Related Documents	 122Kbytes
Pair	

Notice:

1. The values specified in this web site are only for reference. The products and their specifications are subject to change without notice. Contact our sales staff for further information before considering or ordering any of our products.
For purchase, a product specification must be agreed upon.
2. Users are requested to provide protection circuits and redundancy circuits to ensure safety of the equipment, and sufficiently review the suitability of JAE's products to the equipment.
3. The products presented in this web site are designed for the uses recommended below.
We strongly suggest you contact our sales staff when considering use of any of the products in any other way than the recommended applications or for a specific use that requires an extremely high reliability.

(1) Applications that require consultation:


- (i) Please contact us if you are considering use involving a quality assurance program that you specify or that is peculiar to the industry, such as:
Automotive electrical components, train control, telecommunications devices (mainline), traffic light control, electric power, combustion control, fire prevention or security systems, disaster evention equipment, etc.
- (ii) We may separately give you our support with a quality assurance program that
you specify, when you think of a use such as :

Aviation or space equipment, submarine repeaters, nuclear power control systems, medical equipment for life support, etc.

(2) Recommended applications include:

Computers, office appliances, telecommunications devices (terminals, mobile units), measuring equipment, audiovisual equipment, home electric appliances, factory automation equipment, etc

6190E0RS
(NON-CONNECTOR)各要素図

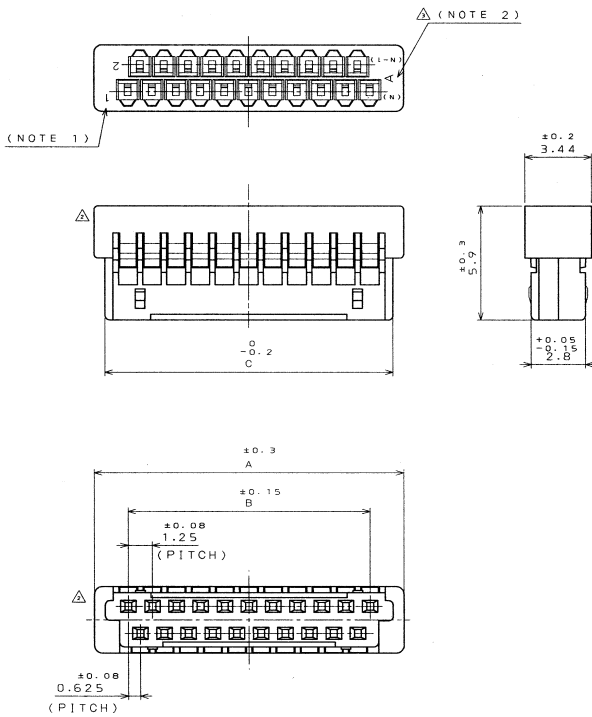

SYM. 版数	DCN NO.	DESCRIPTION 変更内容	DATE 年月日	DRAWN 製図	CHECKED 担当	APP'D 発階	APP'D 承認
2	3775B	REVISED FORM etc	5.11.96	M.OWA	K.HISAMATSU	K.IBARAKI	T.MORINO
3	3847B	ADDED ITEM etc	5.11.96		K.HISAMATSU	K.IBARAKI	T.MORINO


△ TABLE 1

DIMENSION No. OF CONTACTS	A	B	C
13	11	7.5	9.9
15	12.25	8.75	11.15
17	13.5	10	12.4
19	14.75	11.25	13.65
21	16	12.5	14.9
31	22.25	18.75	21.15
41	28.5	25	27.4

NOTE 1. NUMBER OF CONTACTS APPEARS IN RAISED LETTERS.
2. TOOLING MARK APPEARS IN RAISED LETTERS.
1. この面に端子番号を浮き出す。
2. この面に金型マークを浮き出す。

1	HOUSING	1	GLASS FILLED 6-6NY		UL94V-0 BLACK
ITEM 符号	DESCRIPTION 名称	Q'TY 個数	MATERIAL 材料	FINISH	REMARKS
仕様書 (REFERENCE DOCUMENT)	第1版 (DATE) 5. Feb '96	尺度 (SCALE) 5:1			JAE CONNECTOR.COM Reference Only JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
公差 (GENERAL TOLERANCE)	製造 (DR.)	名称 (TITLE)			
寸法 (DIMENSION)	角度 (ANGLES)	担当 (CHK.) K. HISAMATSU		F I - W ※ S	JAE
.X ± 0.8 X° ±		承認 (APP.) K. IBARAKI		HOUSING ハウジング	日本航空電子工業株式会社
.XX ± 0.4 X° ±		承認 (APP.) T. MORINO	シリーズ (SERIES) FI		図面番号 (DRAWING NO.) SJ030619
.XXX ± 0.1 X° ±					

DOF-0-212A(95.08)



JAE Connector Div. Proprietary.
Copyright © Japan Aviation Electronics Industry, Ltd.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO JAE AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.
本図面は日本航空電子工業(株)の所有する情報を含むもので当社の許可なく複製を禁止する。

2001-01-01

4

6