Panel Mount Indicator, Non-Relampable
LED Technology
Mounting Hole, Ø 0.500”

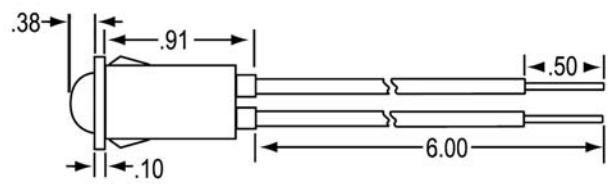

All dimensions are in inches

Recommended panel thickness: 0.030” to 0.090”

6” leads with 1/2" strip are standard

Storage temperature	T_{STG}	: -25°C - +80°C
Ambient temperature	T_A	: -20°C - +60°C
Voltage tolerance	V_{OP}	: ±10%

Part No.	*Lens Color*	*Voltage*	*Current* mA	*Rated Life*
LED 6V Series				
WL-1091M1-6V	Red	5V-6V	20mA	100,000 Hrs
WL-1091M5-6V	Green	5V-6V	20mA	100,000 Hrs
WL-1091M7-6V	Yellow	5V-6V	20mA	100,000 Hrs
LED 12V Series				
WL-1091M1-12V	Red	12V-14V	20mA	100,000 Hrs
WL-1091M5-12V	Green	12V-14V	20mA	100,000 Hrs
WL-1091M7-12V	Yellow	12V-14V	20mA	100,000 Hrs
LED 24V Series				
WL-1091M1-24V	Red	24V-28V	20mA	100,000 Hrs
WL-1091M5-24V	Green	24V-28V	20mA	100,000 Hrs
WL-1091M7-24V	Yellow	24V-28V	20mA	100,000 Hrs

Body Material:	Nylon, white
Lens Material:	Polycarbonate
Bezel Material:	Stainless steel
Wire Gauge:	18 AWG
Wire Strip:	1/2”
Anode(+):	Red lead

Certifications: Most Wamco indicators carry Agency approvals. Please contact Wamco for the latest Agency information regarding the specific product series and voltage required.

Options: Additional options and lens styles available. Please contact Wamco for more information.

Drawn	SC	03/01/10	**Panel Mount Indicators LED**	**Datasheet:** WL-1091MX-XXX Series	**Rev:** 2
Checked	EB	03/01/10			
Approved	EB	03/02/10			

11555 Coley River Circle
Fountain Valley, CA 92708
714.545.5560
Fax: 714.545.6093
www.wamcoinc.com
info@wamcoinc.com

Downloaded from Elcodis.com electronic components distributor