



ELF™ 3200 Series

Digital Energy, Power & V,A,F Meters



So much in so little!

Tiny!

- 96 x 48 mm. Depth 40 mm
- Exciting new applications
- Low CT, PT, Aux Supply burden

Smart!

- True RMS
- Auto scaling: Kilo - Mega - Giga
- 3 Phase Wiring Check
- Large Multi-function display
- Auto-scrolling
- INTG (Energy Parameters)
- OLD Energy Parameter (Wh, VAh, VARh, -VARh) previous energy values

- Easy access to setup using right key during power on
- Unbalance in phases (%Unbal), RPM, Load %

Global!

- Universal operation
- Dustproof
- Retrofit 90 mm² cutouts
- Protection from accidental contact with live terminals
- User programmable, Multiple Parameters
- User programmable Star or Delta. For the first time, you don't even need to specify CT secondary (1A / 5A)
- User Programable CT, PT ratios - Primary and Secondary
- Wide range of Auxiliary Supply

Rugged Construction

- Emission : CISPR 22
Fast Transient : Upto 2kV
IEC 61000-4-4, level 3
- Impulse voltage : 6kV, IEC 60060, 1.2/50

Models

Product Version V02.05

Parameter	ELF 3259	ELF 3234				ELF 3234-3		
		User PAR Setup ¹						
		W	VA	VAR	PF	W	VA	VAR
RMS AVG L1 L2 L3	V	✓						
	A	✓						
	% Load	✓						
	% Unbal	✓						
	F							
	RPM	✓						
RMS TOTAL L1 L2 L3	W	✓				✓		
	VA	✓		✓			✓	
	VAR	✓			✓			✓
	PF				✓	✓	✓	✓
INTEG 3PH energy	Wh		✓			✓		
	VAh			✓			✓	
	VARh				✓			✓
	-VARh				✓			✓
OLD 3PH energy	Wh		✓			✓		
	VAh			✓			✓	
	VARh				✓			✓
	-VARh				✓			✓

Note1: Set up parameter (PAR) is user programmable as shown.


- 10 year back-up of integrated (Energy) data
- VA measurement selectable: 3D or Arithmetic

For comprehensive parameters and simultaneous viewing, we recommend the **EM 6400 Series DigitAN™/Power Max™**

Hoyt Electrical Instrument Works Inc
 23 Meter Street Penacook New Hampshire 03303
 Phone: 603-753-6321 Fax: 603-753-9592
www.hoytmeter.com email us: info@hoytmeter.com



Technical Specifications

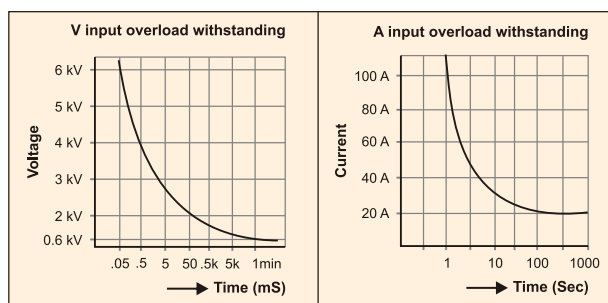

- Sensing : True RMS, 1 sec update time
4 Quadrant Power & 2 Quadrant Energy
- Input : 4 Voltage inputs (V_1, V_2, V_3, V_N)
110 or 415 V L-L nominal
(Range 80 to 500 V L-L)
- Auxiliary Supply : 80-270V ac, 45 to 65 Hz
(Control Power)
- Input current : Current inputs (A_1, A_2, A_3)
Field configurable 1A or 5A
(Range 50mA to 6A)
Overload 10A max. continuous
50A max. for 3 Seconds
- Burden : 0.2 VA max. per Volts / Amps input
3VA max. on Auxiliary Supply
- Frequency : 45 to 65 Hz
- Display : 4 Digit 7 Segment 14 mm LED Display
- Display sequence: Parameter, Value
- Resolution : Energy 8 digit (4 per page)
Power, 3 \emptyset VA Hz 4 digit
- Environmental : Operating Temperature
- 10°C to 60°C (14°F to 140°F)
Storage Temperature
- 25°C to + 70°C
(-13°F to 158°F)
Humidity 5% to 95% Non Condensing
- Weight : 225 gms approx
- Dimensions : Bezel 96 x 48 mm
Depth 40 mm behind Bezel
- Panel Cut-out : (90⁺¹_{.0}) x (43⁺¹_{.0}) mm
- Mounting : Flush Mount, Slide Lock
- Warranty : 1 Year from date of Invoice

Accuracy

Class 1.0: W / Wh: Class 1.0 as per IEC 62052-11 & IEC 62053-21, VAR / VARh: Class 2.0
All other parameters 1.0% of reading.

Class 0.5: W / Wh: Class 0.5 as per IEC 62052-11 & IEC 62053-21, VAR / VARh: Class 1.0
All other parameters 0.5% of reading.

- Note: 1. PF Accuracy same as W/Wh in %
2. Additional error of 0.05% of full scale for current below 200 mA
3. Full-scale 3 x 240V x 5A


Accessories

Optional: Fused Voltage Probes & Clamp-on Current Probes for portable use. 96 x 96 Adaptor plate

Ordering Information

Specify

Model No.	Accuracy Class
<input type="checkbox"/> ELF 3259	<input type="checkbox"/> CL 1.0 <input type="checkbox"/> CL 0.5
<input type="checkbox"/> ELF 3234	<input type="checkbox"/> CL 1.0 <input type="checkbox"/> CL 0.5
<input type="checkbox"/> ELF 3234-3	<input type="checkbox"/> CL 1.0 <input type="checkbox"/> CL 0.5

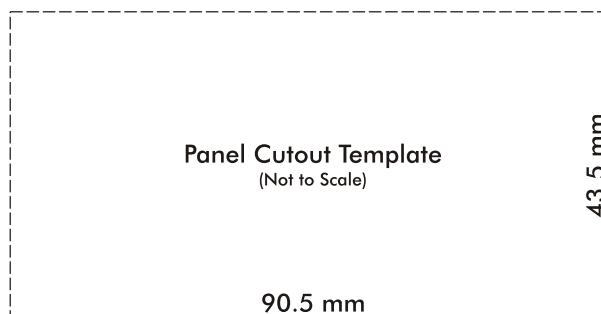

Product specifications are therefore subject to change without notice.



Hoyt Electrical Instrument Works Inc
23 Meter Street Penacook New Hampshire 03303
Phone: 603-753-6321 Fax: 603-753-9592
www.hoytmeter.com email us: info@hoytmeter.com