

ES SERIES

RELAY SOCKETS



DESCRIPTION

5 and 8 Pin Slim Line Sockets, DIN Rail Mountable, Finger Safe

ELECTRICAL RATING

• 300 Volts, 10 Amps ; 300 Volts, 12 Amps

CONSTRUCTION

Contacts • Brass, Nickel Plated
Screws • M3 Steel, Nickel Plated, Maximum Wire Gauge #14
Molding • Break Resistant Thermoplastic

AGENCY APPROVALS

• UL recognized, File No. E113714
 • CSA certified, File No. 172852
 • CE



ORDERING CODE

PART NO.	DESCRIPTION	TERMINAL TYPE
ES35	SPDT, 5 Pin Slim Line (Fig. 1)	Box Lug
ES50	DPDT, 8 Pin Slim Line (Fig. 2)	Box Lug

ACCESSORIES




PART NO. DESCRIPTION (Refer to the accessories pages 25-27)

C-103-PM	Prepunched Aluminum DIN Rail (1 Meter Lengths)
C-104-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-105-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-106-2PM	Prepunched Steel DIN Rail (2 Meter Lengths)
C-108-PM	Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
C-108-2PM	Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)
MS12	Hold Down Spring/Ejector
MS16	Hold Down Spring/Ejector
MS25	Hold Down Spring/Ejector


PLUG-IN INDICATOR AND PROTECTION MODULES

PART NO.	DESCRIPTION
Type 22	Diode for 6-230V DC (+Terminal A1)
Type 42V	Green LED with Diode for 6-24V DC (+ Terminal A1)
Type 42CV	Green LED with Diode for 110-230V DC (+ Terminal A1)
Type 52B	RC Circuit for 6-24V AC
Type 52C	RC Circuit for 110-240V AC
Type 62V	Green LED for 6-24V AC/DC (For DC + Terminal A1)
Type 92V	Green LED for 110-240V AC/DC (For DC + Terminal A1)
Type 62CV	Varistor + Green LED for 6-24V AC/DC (For DC + Terminal A1)
Type 92CV	Varistor + Green LED for 110-240V AC/DC (For DC + Terminal A1)
Type 102	Bypass Resistor 110-240V AC

Fig. 1


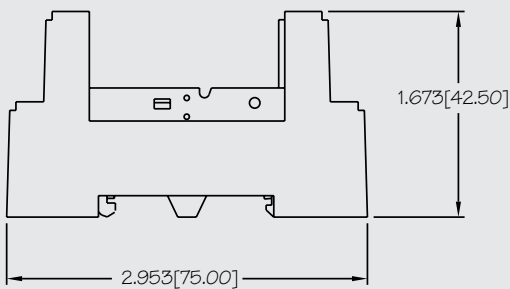



TERMINAL LOCATION




TOP VIEW

Fig. 2

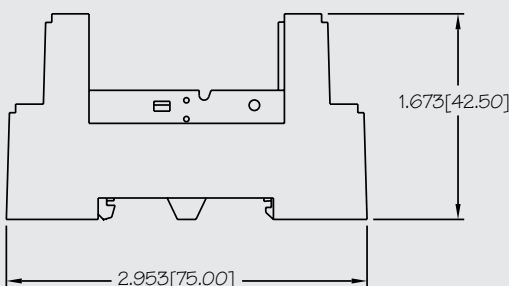

TERMINAL LOCATION



TOP VIEW