


Regulated Linear Power Supplies



SPW Series 15 Watts to 175 Watts

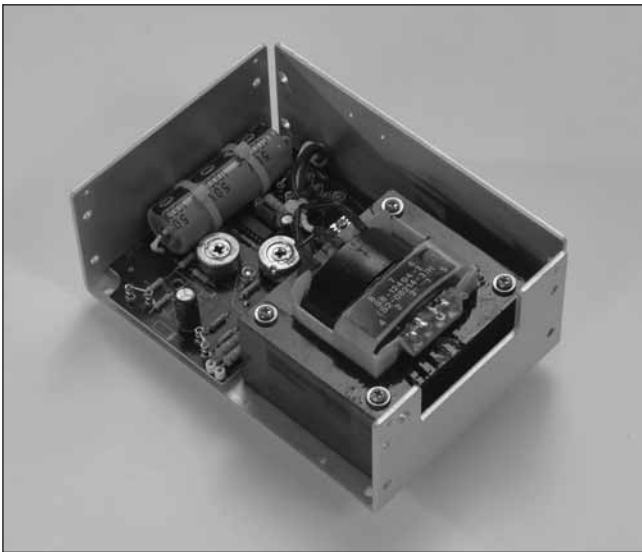

FEATURES

- Worldwide AC input range
- Worldwide safety standards
- Industry standard package
- Built-in OVP on 5V output
- Optional OVP for other outputs
- Overload protection with automatic recovery
- 100% burn-in
- Recognized to UL, CSA Certified, and CE Listed

APPLICATIONS

- Personal Computers
- Instrumentation
- Control Concepts
- Data Processing
- Microprocessor Circuits
- Electronic Circuits

ELECTRICAL SPECIFICATIONS

AC INPUT

INPUT VOLTAGE: 100/120/220/230/240 selectable

INPUT FREQUENCY: 47 to 63 Hz typical 60 Hz

DC OUTPUT

OUTPUT ADJUSTMENT RANGE: $\pm 5\%$ minimum

The "SPW" series regulated linear power supplies are accepted world-wide for selectable AC input voltages of 100 through 240 V and meet UL, CSA and TUV standards. These units have overload protection with automatic recovery and 100% burn-in. All 5V output models have built-in over voltage protection.

CATALOG NO.	OUTPUT 1		CASE
	VDC	AMPS	
SPWS-53-0V	5	3.0	A
SPWS-1217	12	1.7	A
SPWS-2412	24	1.2	A
SPWS-2424	24	2.4	B
SPWS-2436	24	3.6	C
SPWS-2448	24	4.8	D
SPWS-2472	24	7.2	E

AC INPUT JUMPER INFORMATION

FOR USE AT	100Vac	120Vac	220Vac	230/240Vac
Jumper	1-3, 2-4	1-3, 2-4	2-3	2-3
Apply AC	1 & 5	1 & 4	1 & 5	1 & 4



REGULATED LINEAR POWER SUPPLIES

SPW SERIES 15 Watts to 175 Watts



CATALOG NO.	OUTPUT 1	
	VDC	AMPS
SPWS-53-0V	5	3.0
SPWS-1217	12	1.7
SPWS-2412	24	1.2
SPWS-2424	24	2.4
SPWS-2436	24	3.6
SPWS-2448	24	4.8
SPWS-2472	24	7.2

Features

- Worldwide AC input range
- Worldwide safety standards
- Industry standard package
- Built-in OVP on 5V output
- Optional OVP for other outputs
- Overload protection with automatic recovery
- 100% burn-in
- Recognized to UL, CSA Certified, and CE Listed

Applications

- Personal Computers
- Instrumentation
- Control Concepts
- Data Processing
- Microprocessor Circuits
- Electronic Circuits



SPW Series Electrical Specifications

AC INPUT

INPUT VOLTAGE: 100/120/220/230/240 selectable
INPUT FREQUENCY: 47 to 63 Hz typical 60 Hz;

DC OUTPUT

OUTPUT ADJUSTMENT RANGE: $\pm 5\%$, Min.