

Free eNewsletter

Enter your E-mail



Shop By Type

Cable Assemblies
Adapters
Connectors
Rack Panels
Bulk Cable
Tools
Switch Boxes
Network Cards
Hubs & Switches
Converters & Transceivers
KVM Switches
Antennas

Overstock/Sale Items
Top 10 Products

Shop By Category

IEEE-488 GPIB
Coaxial
Monitor, Video
Fiber Optic
D-Subminiature
Modular
USB, DIN, Firewire, SCSI, and Others
Wireless Infrastructure
Weatherproof Enclosures
Networking and Other Equipment

Product Wizards

Cable Assemblies
Adapters
Connectors
Rack Panels
Tools
Switch Boxes
Network Cards
Hubs or Switches
Ethernet Converters
KVM Switches

Technical Resources

FAQs
Connector Chart
Glossary
Tutorials
Tips and Videos
White Papers
Catalog Downloads
eNewsletter Archive




L-com is ISO 9001:2008
UL Certified

You Are Here: [Home](#) > [D-Subminiature](#) > [Connectors](#) > [WPSD](#) > **WPSD25S**

Waterproof Panel Mount Solder Cup D-Sub Connector, DB25F

Features for this product

- Waterproof D-sub panel mount solder connectors
- IP67 rating provides protection under harsh conditions
- Mounts on any panel or enclosure 0.078" thick or smaller
- Gold plated contacts provide reliable connections with repeated mating cycles
- Also available in DB9, DB15 & HD15 sizes, male & female genders

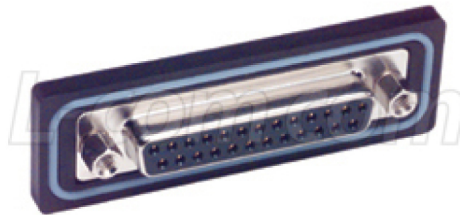

Harsh outdoor or indoor environments can destroy electronic equipment. Standard D-sub connectors are not intended to withstand contaminants such as water and dust. This waterproof solder cup DB25 female connectors will accommodate wire ranges from 30 - 20 AWG. Construction features gold plated brass contacts, nickel plated steel shells, and a silicone insulating ring. Maximum recommended panel thickness is 0.078"

Details for this D-Subminiature product

L-com Item #	WPSD25S
Manufacturer	L-com
ASIN # (More)	B000AA76LQ
UPC # (More)	822335041202
RoHS Status	RoHS Compliant (More)

[Catalog Page](#)

[2D Drawing \(.pdf\)](#)

[3D CAD Model \(.step\)](#)

Item #	Description	1-9	10-24	25-99	100-249	250-499
--------	-------------	-----	-------	-------	---------	---------

Waterproof D-Sub Connectors and Backshells - IEC IP67 Rated

Harsh outdoor or indoor environments can destroy electronic equipment. Standard D-Sub connectors are not intended to withstand contaminants such as water and dust. By utilizing tough ABS housings, rubber gaskets and silicone insulating rings, these products achieve IEC IP67 ratings. Panel mounted D-Sub solder connectors are rear mounted and fit into standard D-Sub holes. Backshells conform to a variety of cable diameters by adjusting the sealing nut. L-com will manufacture cable assemblies using waterproof backshells with modest minimum requirements.

Waterproof D-Sub Panel Mount Solder Connectors

These solder cup connectors are available in male or female genders and DB9, DB15, DB25 and HD15 sizes. They will accommodate wire ranges from 30 - 20AWG. Construction features gold plated brass contacts, nickel plated steel shells and a silicone insulating ring. Maximum recommended panel thickness is 0.078".

- [WPSD9P](#) Waterproof Panel Mount Solder Cup D-Sub Connector, DB9M
- [WPSD9S](#) Waterproof Panel Mount Solder Cup D-Sub Connector, DB9F
- [WPSD15P](#) Waterproof Panel Mount Solder Cup D-Sub Connector, DB15M
- [WPSD15S](#) Waterproof Panel Mount Solder Cup D-Sub Connector, DB15F
- [WPSD25P](#) Waterproof Panel Mount Solder Cup D-Sub Connector, DB25M
- [WPSD25S](#) Waterproof Panel Mount Solder Cup D-Sub Connector, DB25F
- [WPSDH15P](#) Waterproof Panel Mount Solder Cup D-Sub Connector, HD15M
- [WPSDH15S](#) Waterproof Panel Mount Solder Cup D-Sub Connector, HD15F

Waterproof D-Sub Backshell Kits

These backshell kits include solder cup connectors and are also available in male or female genders and DB9, DB15, DB25 and HD15 sizes. The connectors will accommodate wire ranges from 30 - 20AWG. Backshell construction features ABS housings, nylon seals, nickel plated brass thumbscrews and rubber sealing gaskets to insure IEC IP67 rating. Color: Black.

- [WPDB9P-KIT](#) Waterproof D-Sub Backshell Kit, DB9M
- [WPDB9S-KIT](#) Waterproof D-Sub Backshell Kit, DB9F
- [WPDB15P-KIT](#) Waterproof D-Sub Backshell Kit, DB15M
- [WPDB15S-KIT](#) Waterproof D-Sub Backshell Kit, DB15F
- [WPDB25P-KIT](#) Waterproof D-Sub Backshell Kit, DB25M
- [WPDB25S-KIT](#) Waterproof D-Sub Backshell Kit, DB25F
- [WPHDB15P-KIT](#) Waterproof D-Sub Backshell Kit, HD15M
- [WPHDB15S-KIT](#) Waterproof D-Sub Backshell Kit, HD15F



2008 Master Catalog 1.0

Tip *How to apply panel mount waterproof D-Sub products*

STEP 1

Mount D-Sub connector from inside of panel/enclosure using hex jack screws provided.

STEP 2

Apply sealing gasket (supplied with backshell kit) in backshell channel around perimeter of D-Sub connector.

STEP 3

Mate connectors and secure backshell thumbscrews to threaded jackscrews.

Waterproof IP67 rating is achieved by gaskets/seals in backshell and silicone seal ring in connector.

Shop at **L-com.com** or call **1-800-343-1455**
 E-mail: sales@L-com.com Fax: 978-689-9484

How-to videos help with some of today's popular product applications. L-com.com/Tips