

Cable and QD hookups are functionally identical


Sensing Mode and Range		Beam	Model*	Output	Sensing Mode and Range		Beam	Model*	Output		
Retroreflective	5 m (15')	Visible Red 650 nm	SME312LV	Bipolar NPN/PNP	Glass Fiber Optic	Range Varies depending on sensing mode and fiber optics used	Infrared 880 nm	SME312F	Bipolar NPN/PNP		
	Polarized Retroreflective		10 mm - 3 m (0.4" - 10')				SME312LP	Visible Red 650 nm		SME312FV	
1 m (3.3') Clear Material		SME312LPC	Visible Green 525 nm				SME312FVG				
	Diffuse	380 mm (15")	Infrared 880 nm				SME312D	Plastic Fiber Optic		Range Varies depending on sensing mode and fiber optics used	Visible Blue 475 nm
1100 mm (43")		Visible Red 650 nm	SME312DV				Visible White 450 - 650 nm				SME312FVW
		130 mm (5") Clear Mat'l	Infrared 880 nm				SME312W				Visible Red 650 nm
Convergent	16 mm (0.65") 1.3 mm (0.05") [†]	Visible Red 650 nm	SME312CV		Bipolar NPN/PNP	Plastic Fiber Optic	Range Varies depending on sensing mode and fiber optics used	Visible Green 525 nm		SME312FPG	
			SME312CV2					Visible Blue 475 nm		SME312FPB	
	43 mm (1.7") 3.0 mm (0.12") [†]	Visible Green 525 nm	SME312CVG					Visible White 450 - 650 nm		SME312FPB	
			16 mm (0.65") 1.0 mm (0.04") [†]					Visible Blue 475 nm		SME312CVB	Visible White 450 - 650 nm
	SME312CVW										

[†] Spot size, at focus


- * Standard 2 m (6.5') cable models are listed.
- 9 m (30') cable: add suffix "W/30" to the model number (e.g., SME312CVB W/30).
- 5-pin integral QD models: add suffix "Q" (e.g., SME312CVBQ).

Dimensions

**Retroreflective, Diffuse, and Convergent Models
(Suffix LV, LP, LPC, D, DV, CV, CV2, CVG, CVB and CVW)**

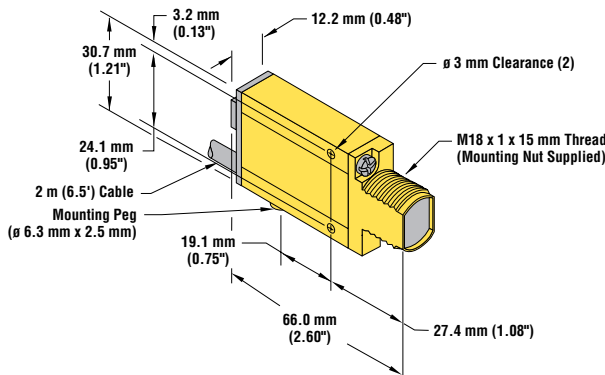


All Quick-Disconnect Models

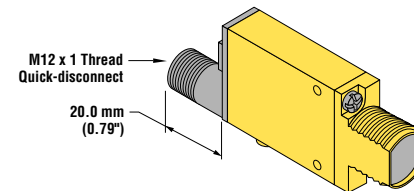


MINI-BEAM® Expert™ Series – DC Voltage

Dimensions, continued


Divergent Diffuse Models (Suffix W)

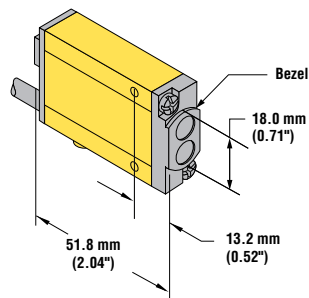

Glass Fiber Optic Models (Suffix F, FV, FVG, FVB and FVW)

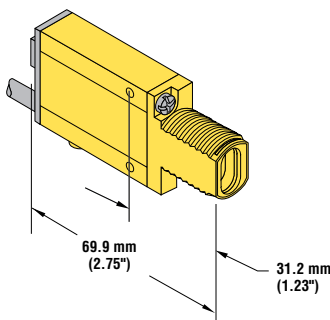

Plastic Fiber Optic Models (Suffix FP, FPG, FPB and FPW)

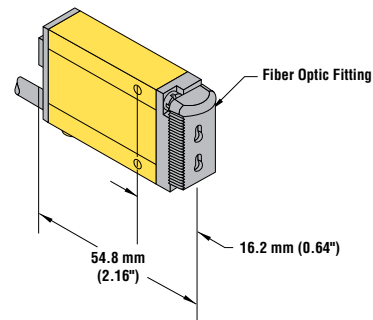

Overview

Status indicators

Normal operation of the MINI-BEAM Expert is called RUN mode. The two LED indicators (bi-color Green/Red and Yellow) operate as follows in RUN mode and TEACH mode:

	RUN Mode	TEACH Mode
Bi-Color Green/Red	ON Green: Power is ON Flashing Green: Sensed light level is approaching sensing threshold*	ON Red: Sensor "sees" its own modulated light source; pulse rate is proportional to the received light signal strength**
Yellow	ON: Outputs conducting OFF: Outputs not conducting	ON: Ready to TEACH output ON condition OFF: Ready to TEACH output OFF condition

* This is the Stability indicator, which signals when maintenance, realignment, or reconfiguration is needed during RUN mode.

** The faster the pulse rate, the stronger the light signal.

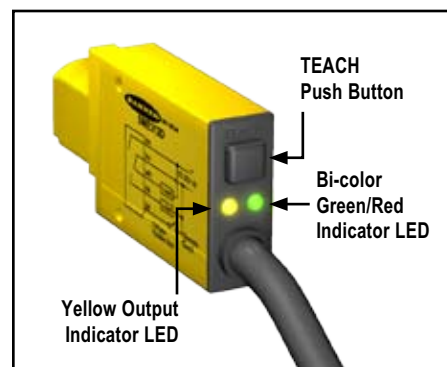


Figure 1. Features

If contrast is marginal, the bi-color indicator will flash green (to indicate instability). Reprogramming or realigning the sensor, or cleaning the sensor or fiber lenses may solve a problem with stability.

Remote Configuration

The remote function may be used to configure the sensor remotely or to disable the push button for security. Connect the gray wire of the sensor to ground (0V dc), with a remote programming switch connected between them. Pulse the remote line according to the diagrams in the configuration procedures. The length of the individual programming pulses is equal to the value T:

$$0.04 \text{ seconds} \leq "T" \leq 0.8 \text{ seconds}$$

Troubleshooting

The MINI-BEAM Expert's Power LED may begin to alternate flashing red/green; this indicates a microprocessor memory error. If it occurs, try reteaching the sensor, or try cycling power ON and OFF, then reteaching the sensor. If this does not solve the problem, or if it occurs frequently, replace the sensor.

MINI-BEAM® Expert™ Series – DC Voltage

Specifications

Supply Voltage and Current

10 to 30V dc (10% max. ripple) at less than 45 mA, exclusive of load

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Output Configuration

Bipolar: One current sourcing (PNP) and one current sinking (NPN) open-collector transistor

Output Rating

150 mA max. each output at 25° C, derated to 100 mA at 70° C (derate \approx 1 mA per °C)

Off-state leakage current: less than 5 μ A @ 30V dc

ON-state saturation current: less than 1V @ 10 mA; less than 1.5V @ 150 mA

Output Protection Circuitry

Protected against false pulse on power-up and continuous overload or short-circuit of outputs

Output Response Time

Sensors will respond to either a "light" or a "dark" signal of 500 μ s or longer duration, 1 kHz max.

NOTE: 1 second delay on power-up; outputs do not conduct during this time.

Repeatability

100 microseconds (all models)

Construction

Reinforced thermoplastic polyester housing, totally encapsulated, o-ring seal, acrylic lenses, and stainless steel screws.

Environmental Rating

Meets NEMA standards 1, 2, 3, 3S, 4, 4X, 6, 12, and 13; IEC IP67

Connections

PVC-jacketed 5-conductor 2 m (6.5') or 9 m (30') unterminated cable, or 5-pin Euro-style quick-disconnect (QD) fitting are available. QD cables are ordered separately.

Operating Conditions

Temperature: -20° to +70° C (-4° to +158° F)

Max. rel. humidity: 90% at 50° C (non-condensing)