


HBL47CM20C -- Twist-Lock Plug



HBL47CM20C


Yellow Insulgrip® plug has rugged nylon housing and detachable cord grip with range of .296-.687" (7.5-17.4) that utilizes a unique offset jaws arrangement to provide secure strain relief.

Product Specifications

Product Type	Replacement Plugs
Rating	15A, 125V 2p3w
Housing Type	Standard
Blade Type	Locking
Color	 Yellow
Poles and Wires	2 Pole, 3 Wire Grounding
Approvals	UL, CSA
Certified	UL2305 OEM and replacement use on convention center flat cable cord sets.
Moisture Resistance	IP20
M Drawings	Click here for M-Drawing
Catalog Page	Click here for catalog page V30
Hubbellnet	Click here for Hubbellnet
Catalog Section	Click here for Section-V
UPC Number	78358516050
Weight in LBs	0.05



M-7151 4

ALL SCREWS ARE COMBINATION ROBERTSON/PHILLIPS/SLOTTED HEAD



AGENCY LISTING PER TABLE

MOLDED IN RATING HOT STAMPED WITH IEC COLOR CODED BY VOLTAGE

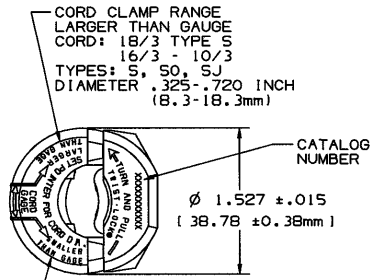

CORD CLAMP RANGE LARGER THAN GAUGE
CORD: 18/3 TYPE 5
16/3 - 10/3
TYPES: S, SJ
DIAMETER: .325-.720 INCH
(8.3-18.3mm)

CORD CLAMP RANGE SMALLER THAN GAUGE
CORD: 18/3-16/3
TYPES: SV, SJ
DIAMETER: .230-.360 INCH
(5.8-9.1mm)

CHEM-MARINE CAT. NO. (YELLOW COVER) & INSERT	CAT. NO. (YELLOW COVER) & INSERT	CAT. NO. (BLACK COVER) & INSERT	CONFIGURATION	RATING	IEC RATING COLOR	U.L.	C.S.A.
HBL47CM20C	_____	HBL4720C	NEMA 5-15P	15A. 125V.	YELLOW	YES	YES
HBL45CM70C	_____	HBL4570C	NEMA 6-15P	15A. 250V.	BLUE	YES	YES
HBL47CM70C	_____	HBL4770C	NEMA 7-15P	15A. 277VAC	GRAY	YES	YES
_____	HBL7567CY	HBL7567C	3 POLE 3 WIRE	15A. 125V. 10A. 250V.	BLACK	NO	NO

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
BLADE HOLDER	NYLON	NATURAL
RETAINER	LEXAN	CLEAR
COVER	NYLON	
INSERT	NYLON	
CORD CLAMP	NYLON	NATURAL
WIRE CLAMP	.062 CRS	NICKEL PL
CONTACT BLADES	.060 BRASS	*
BINDING SCREWS	BRASS	*
GROUND HEX HEAD BINDING SCREW	BRASS	GREEN
CORD CLAMP	STEEL	ZINC PL
ASSY SCREWS	STEEL	ZINC PL

* WHITE FINISH ON NEUTRAL PARTS WHEN USED

NOTE:
ON "CM" DEVICES, STEEL PARTS ARE MADE OF BRASS OR STAINLESS STEEL AND ALL BRASS PARTS ARE .0003 NICKEL PLATED.

SYM	REVISIONS	APP	DATE
4	REMOVED -- FROM CAT NO'S. CHRD SCREWS TO TRI-DRIVE PER DCN #7772	DB	8/17/00
3	"HBL" REMOVED FROM CATALOG #1E IN CISH-WIRING COLUMN IN TABLE PER DCN #3175 RCM	JZ	1/24/95
2	TABLE UPDATED: "ALL SCREWS..." ADDED: AGENCY LISTED... ADDED PER DCN #2040 RCM	JEZ	8/1/94
1	"X" REMOVED PER DCN #1008 RCM	VFL	6/30/93

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS	± 1/64	DR. BY	RCM
DECIMALS	± .005	TR. BY	SCALE
ANGLES	± 2°	APP. BY	VFL
		CHK'D BY	ZIMM
		DATE	6/30/93

TITLE
INSULGRIP Ⓞ
2 POLE 3 WIRE
GROUNDING TWIST-LOCK Ⓞ

DIMENSION SHEET FOR CAT. NO. M-7151
 REPAIRABLE NON-REPAIRABLE

Marine Products

15 Ampere, 125V AC

2 Pole 3 Wire

TWIST-LOCK® Locking Type Devices

HBL47CM00



HBL52CM21 HBL52CM21W



HBL47CM20C



HBL60CM23



HBL47CM29C



HBL60CM24



HBL47CM15



HBL47CM16



15A 125V

NEMA L5-15R

15A 125V AC Twist-Lock Devices

Description	Catalog Numbers
Yellow duplex receptacle has heat resistant body. IP20 SUITABILITY.	HBL47CM00
Yellow Valox® spring-loaded lift cover plate for weatherproofing duplex receptacles. Stainless steel screws and neoprene gasket included for mounting to FS/FD type weatherproof boxes. IP20 SUITABILITY.	HBL52CM21
Same as #HBL52CM21 except white in color. IP20 SUITABILITY.	HBL52CM21W
Same as #HBL52CM21 except gray in color. IP20 SUITABILITY.	HBL5221
Same as #HBL52CM21 except for mounting to standard boxes. IP20 SUITABILITY.	HBL52CM22*
Same as #HBL52CM22 except gray in color. IP20 SUITABILITY.	HBL5222*
Yellow Insulgrip® plug has rugged nylon housing and detachable cord grip with range of .296"-.687" (7.5-17.4) that utilizes a unique offset jaws arrangement to provide secure strain relief. IP20 SUITABILITY.	HBL47CM20C
Short yellow Seal-Tite® cover for weatherproofing #HBL47CM20C Insulgrip® plug when used with receptacles or connector bodies. Also can be used to weatherproof #HBL47CM29C Insulgrip® connector body when used with #HBL47CM16 flanged inlet. IP55 SUITABILITY.	HBL60CM23+
Yellow Insulgrip® connector body has rugged nylon housing and detachable cord grip with range of .296"-.687" (7.5-17.4) that utilizes a unique offset jaws arrangement to provide secure strain relief. IP20 SUITABILITY.	HBL47CM29C
Yellow Seal-Tite® cover for weatherproofing #HBL47CM29C Insulgrip® connector body when used on extension cords and adapters. IP20 SUITABILITY.	HBL60CM24+
Panel mount flanged outlet has heat resistant melamine interior and stainless steel casing. IP20 SUITABILITY.	HBL47CM15
Panel mount flanged inlet has heat resistant melamine interior and stainless steel casing. IP20 SUITABILITY.	HBL47CM16
Three conductor, #14 AWG type STW, yellow PVC jacketed portable cord has jute fillers for added flexibility and is ideal for making cable sets, extension cords and adapters as it will not mark the boat's deck. Available in 250' (76.2m) lengths only.	YC314250*

Notes: *Not shown.

+ Boots are not UL listable.

Valox ® is a registered trademark of General Electric Company.