

Device Type	Features	Page	VCES	IC	Package
1MBI150NH-060	600V/150A Chopper Module	4	600V max	150A max	
1MBI150NK-060	600V/150A Chopper Module	4	600V max	150A max	
1MBI200N-120	1200V/200A 1 in one-package	4	1200V max	200A max	M127
1MBI200NH-060	600V/200A Chopper Module	4	600V max	200A max	
1MBI200NK-060	600V/200A Chopper Module	4	600V max	200A max	
1MBI300N-120	1200V/300A 1 in one-package	4	1200V max	300A max	M127
1MBI300NN-120	1200V/300A 1 in one-package	4	1200V max	300A max	M129
1MBI300NP-120	1200V/300A 1 in one-package	4	1200V max	300A max	M128
1MBI400N-120	1200V/400A 1 in one-package	4	1200V max	400A max	M127
1MBI400NN-120	1200V/400A 1 in one-package	4	1200V max	400A max	M129
1MBI400NP-120	1200V/400A 1 in one-package	4	1200V max	400A max	M128
1MBI600NN-060	600V/600A 1 in one-package	4	600V max	600A max	M129
1MBI600NP-060	600V/600A 1 in one-package	4	600V max	600A max	M128

1MBI300NP-120 1MBI300NN-120

IGBT Module

1200V / 300A 1 in one-package

■ Features

- High speed switching
- Voltage drive
- Low inductance module structure

■ Applications

- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply
- Industrial machines, such as Welding machines



■ Maximum ratings and characteristics

● Absolute maximum ratings (at Tc=25°C unless otherwise specified)


Item	Symbol	Rating	Unit
Collector-Emitter voltage	V _{CEs}	1200	V
Gate-Emitter voltage	V _{GES}	±20	V
Collector current	Continuous	I _c	300 A
	1ms	I _c pulse	600 A
	Continuous	-I _c	300 A
	1ms	-I _c pulse	600 A
Max. power dissipation	P _c	2100	W
Operating temperature	T _j	+150	°C
Storage temperature	T _{stg}	-40 to +125	°C
Isolation voltage	V _{is}	AC 2500 (1min.)	V
Screw torque	Mounting *1	3.5	N·m
	Terminals *2	4.5	N·m
	Terminals *3	1.7	N·m

*1: Recommendable value : 2.5 to 3.5 N·m(M5) or (M6)

*2: Recommendable value : 3.5 to 4.5 N·m(M6)

*3: Recommendable value : 1.3 to 1.7 N·m(M4)

■ Equivalent Circuit Schematic

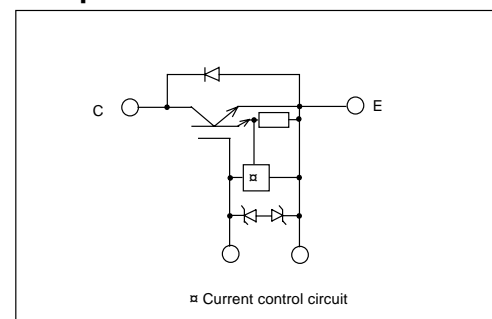



● Electrical characteristics (at T_j=25°C unless otherwise specified)

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	I _{CEs}	-	-	4.0	V _{GE} =0V, V _{CE} =1200V	mA
Gate-Emitter leakage current	I _{GES}	-	-	60	V _{CE} =0V, V _{GE} =±20V	μA
Gate-Emitter threshold voltage	V _{GE(th)}	4.5	-	7.5	V _{CE} =20V, I _c =300mA	V
Collector-Emitter saturation voltage	V _{CE(sat)}	-	-	3.3	V _{GE} =15V, I _c =300A	V
Input capacitance	C _{ies}	-	48000	-	V _{GE} =0V	pF
Output capacitance	C _{oes}	-	17400	-	V _{CE} =10V	
Reverse transfer capacitance	C _{res}	-	15480	-	f=1MHz	
Turn-on time	t _{on}	-	0.65	1.2	V _{CC} =600V	μs
	t _r	-	0.25	0.6	I _c =300A	
Turn-off time	t _{off}	-	0.95	1.5	V _{GE} =±15V	μs
	t _f	-	0.35	0.5	R _G =2.7 ohm	
Diode forward on voltage	V _F	-	-	3.0	I _F =300A, V _{GE} =0V	V
Reverse recovery time	t _{rr}	-	-	0.35	I _F =300A	μs



● Thermal resistance characteristics

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	R _{th(j-c)}	-	-	0.06	IGBT	°C/W
	R _{th(j-c)}	-	-	0.12	Diode	°C/W
	R _{th(c-f)*4}	-	0.0125	-	the base to cooling fin	°C/W

*4: This is the value which is defined mounting on the additional cooling fin with thermal compound

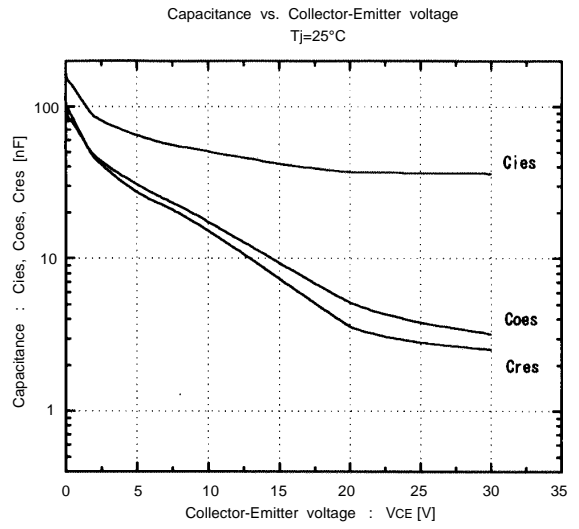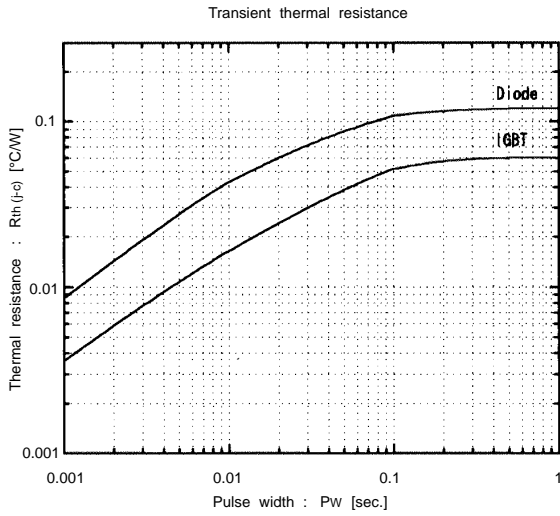

■ Outline Drawings, mm

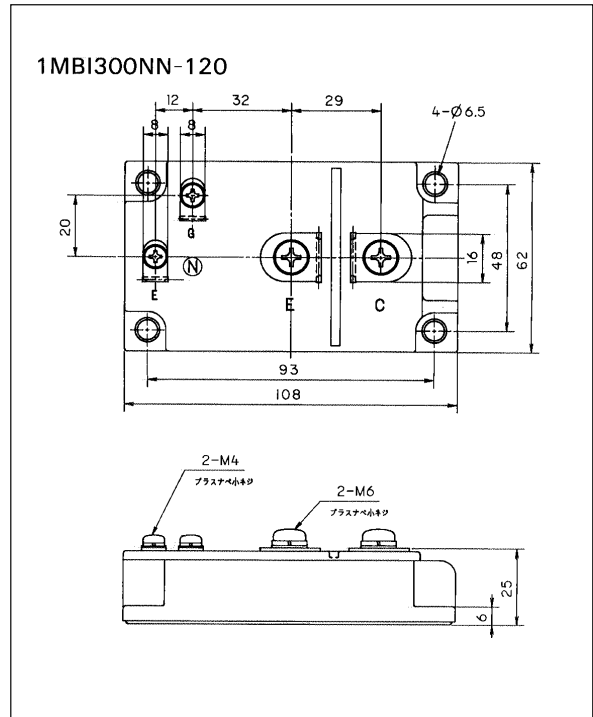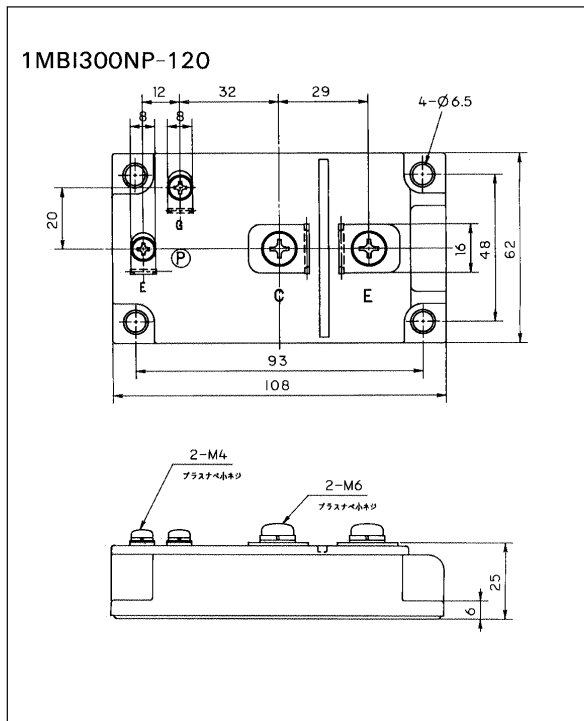

mass : 370g