

**Power PCB Relay PCFN Solar**

- 1 pole, 26 A, 1 NO Contact
- contact gap > 1.5 mm
- 200 mW hold power
- Ambient temperature up to 75°C, 85°C at 22 A
- RoHS compliant (Directive 2002/95/EC)



F-PCFNsolar

**Applications: Photovoltaic inverter**

**Approvals**



Technical data of approved types on request

**Contact data**

Contact configuration	1 N/O
Contact set	single contact
Contact gap	> 1.5 mm
Rated current	26 A
Rated voltage	277 VAC
Maximum breaking capacity AC	7200 VA
Contact material	AgSnO <sub>2</sub>
Mechanical endurance	1x10 <sup>6</sup> cycles
Rated frequency of operation with / without load	6 / 300 min <sup>-1</sup>

**Contact ratings**

Load	Cycles
22 A, 250 VAC, resistive, 85°C	30x10 <sup>3</sup>
26 A, 250 VAC, resistive, 75°C	30x10 <sup>3</sup>

**Coil data**

Rated coil voltage	12 VDC
Coil power	1.5 W <sup>1)</sup>
Coil insulation system according UL 1446	class F

**Coil version, DC-coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ohm	Rated coil power W
12	12	7.8	1.2	96±10%	1.5

All figures are given for coil without preenergization, at ambient temperature +23°C  
Hold voltage ≥ 4.4 V at ambient temperature ≤ 85°C

<sup>1)</sup> Ambient temperature > 23°C requires reduction of coil voltage to 4.4...< 6 V after 100ms


**Power PCB Relay PCFN Solar (Continued)**

**Insulation**


Dielectric strength coil-contact circuit	4000 V <sub>rms</sub>
open contact circuit	2500 V <sub>rms</sub>
Clearance / creepage coil-contact circuit	6.1 / 6.1 mm
Material group of insulation parts	III
Tracking index of relay base	PTI 175
Insulation to IEC 60664-1	
Type of insulation coil-contact circuit	basic
open contact circuit	basic
Rated insulation voltage	250 V
Pollution degree	2
Rated voltage system	277 V
Overvoltage category	III

**PCB layout / terminal assignment**

Bottom view on solder pins

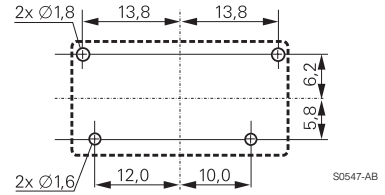

S0547-AB




S0547-AA

**Other data**

RoHS - Directive 2002/95/EC	compliant
Flammability class according to UL94	V-0
Ambient temperature range <sup>1)</sup>	-25...+75 °C
	-25...+85 °C at 22 A
Operate- / release time	20 / 10 ms
Bounce time	3 ms
Vibration resistance (function)	10 g
Shock resistance (function)	10 g
Shock resistance (destruction)	100 g
Category of protection	RTII - flux proof
Mounting	pcb
Mounting position	any
Mounting distance	10 mm
Resistance to soldering heat	260°C / 5 s
Relay weight	28 g
Packaging unit	20 / 500
<sup>1)</sup> Ambient temperature > 23°C requires reduction of coil voltage to 4.4...< 6 V after 100ms	

**Dimensions**

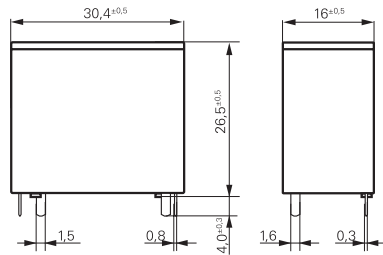

S0548-A

Product key	Version	Contact configuration	Contact material	Coil	Part number
PCFN-112H2MG	PCB, flux tight	1 NO contact	AgSnO <sub>2</sub>	12 VDC	1721929-1