


Fast Switching Plastic Rectifier

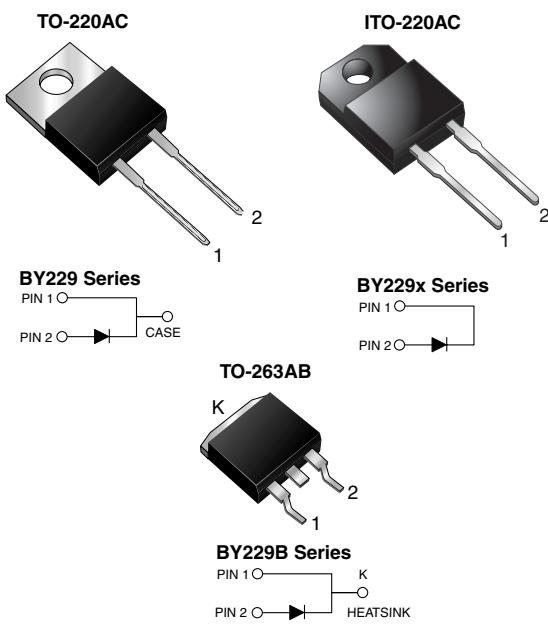

FEATURES

- Glass passivated chip junction
- Superfast recovery time for high efficiency
- Low leakage current
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 245 °C (for TO-263AB package)
- Solder dip 260 °C, 40 s (for TO-220AC and ITO-220AC package)
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC


RoHS
COMPLIANT

TYPICAL APPLICATIONS

For use in fast switching rectification of power supply, inverters, converters and freewheeling diodes application.

MECHANICAL DATA

Case: TO-220AC, ITO-220AC, TO-263AB

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix for commercial grade, meets JESD 201 class 1A whisker test, HE3 suffix for high reliability grade (AEC Q101 qualified), meets JESD 201 class 2 whisker test

Polarity: As marked

Mounting Torque: 10 in-lbs maximum

PRIMARY CHARACTERISTICS	
I _{F(AV)}	8.0 A
V _{RRM}	200 V to 800 V
I _{FSM}	100 A
t _{rr}	145 ns
V _F	1.85 V
T _J max.	150 °C

MAXIMUM RATINGS (T _C = 25 °C unless otherwise noted)						
PARAMETER	SYMBOL	BY229-200	BY229-400	BY229-600	BY229-800	UNIT
Maximum recurrent peak reverse voltage	V _{RRM}	200	400	600	800	V
Maximum RMS voltage	V _{RMS}	140	280	420	560	V
Maximum DC blocking voltage	V _{DC}	200	400	600	800	V
Maximum average forward rectified current at T _C = 100 °C	I _{F(AV)}	8.0				A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	100				A
Maximum slope of reverse recovery current I _F = 2.0 A, V _R = 30 V, dI/dt = 20 µs	dI/dt	60				A/µs
Operating junction and storage temperature range	T _J , T _{STG}	- 40 to + 150				°C
Isolation voltage (ITO-220AC only) from terminal to heatsink t = 1 min	V _{AC}	1500				V

BY229(X,B)-200 thru BY229(X,B)-800

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	TEST CONDITIONS		SYMBOL	BY229-200	BY229-400	BY229-600	BY229-800	UNIT
Maximum instantaneous forward voltage (1)	20 A		V_F	1.85		V		
Maximum DC reverse current at rated DC blocking voltage		$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	I_R	10 300		μA		
Maximum reverse recovery time	$I_F = 1.0 \text{ A}$, $V_R = 30 \text{ V}$, $dI/dt = 50 \text{ A}/\mu\text{s}$, $I_{rr} = 10\% I_{RM}$		t_{rr}	145		ns		
Maximum recovered stored charge	$I_F = 2.0 \text{ A}$, $V_R = 30 \text{ V}$, $dI/dt = 20 \text{ A}/\mu\text{s}$		Q_{rr}	700		nC		

Note:

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

THERMAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	BY229	BY229X	BY229B	UNIT
Typical thermal resistance from junction to case	$R_{\theta JC}$	2.0	4.8	2.0	°C/W
Typical thermal resistance from junction to air	$R_{\theta JA}$	20	-	20	°C/W

ORDERING INFORMATION (Example)


PACKAGE	PREFERRED P/N	UNIT WEIGHT (g)	PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TO-220AC	BY229-200-E3/45	1.80	45	50/tube	Tube
ITO-220AC	BY229X-200-E3/45	1.95	45	50/tube	Tube
TO-263AB	BY229B-200-E3/45	1.77	45	50/tube	Tube
TO-263AB	BY229B-200-E3/81	1.77	81	800/reel	Tape reel
TO-220AC	BY229-200HE3/45 (1)	1.80	45	50/tube	Tube
ITO-220AC	BY229X-200HE3/45 (1)	1.95	45	50/tube	Tube
TO-263AB	BY229B-200HE3/45 (1)	1.77	45	50/tube	Tube
TO-263AB	BY229B-200HE3/81 (1)	1.77	81	800/reel	Tape reel

Note:


(1) Automotive grade AEC Q101 qualified

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)


TO-220AC

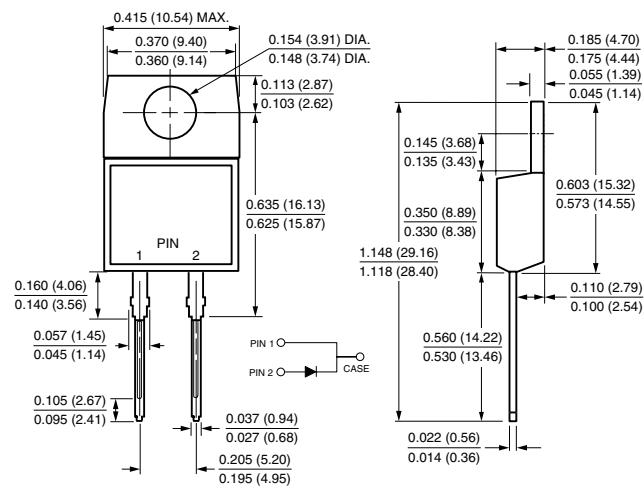

ITO-220AC

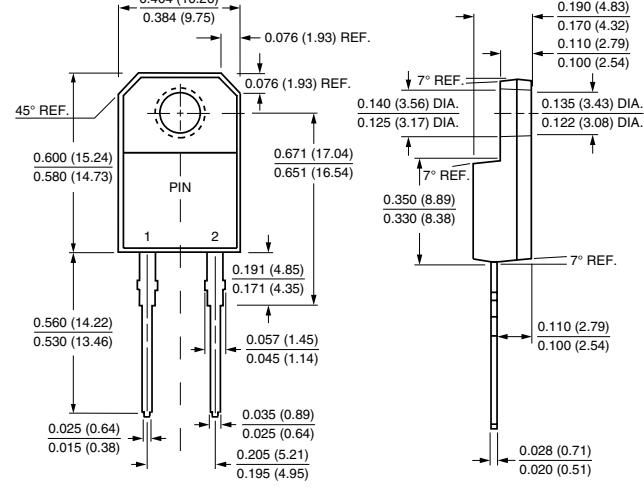

TO-263AB

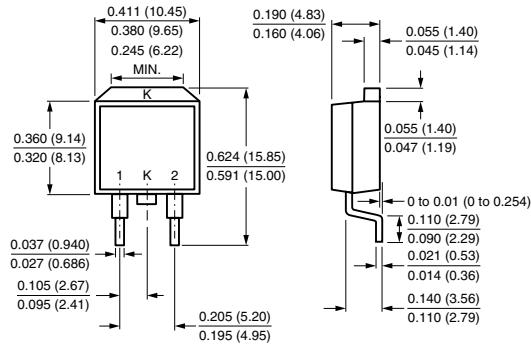

Mounting Pad Layout

