



Buzzer Unit Series with Cylindrical 22-mm × 16-dia. Body

- Lineup includes standard-volume models (80 phons, constant) and high-volume models (70 to 95 phons, variable). Intermittent or continuous sound can be selected.





List of Models

Buzzer

Appearance	Model
Rectangular standard-volume model 	M2BJ-B
Rectangular high-volume model 	M2BJ-BH

Ordering Information

Appearance							
		Standard sound				High sound *1	
w/jumper direction A *2		Intermittent	Intermittent (short)	Intermittent (high-pitched)	Intermittent (short, high-pitched)	Intermittent (high-pitched)	Intermittent (short)
w/jumper direction B *2 (w/o jumper)		Continuous	Intermittent (long)	Continuous (high-pitched)	Intermittent (long, high-pitched)	Continuous	Intermittent (long)
Supply voltage							
6 VAC/VDC	Model	M2BJ-B06	M2BJ-B06A	M2BJ-B06B	M2BJ-B06C	M2BJ-BH06D	M2BJ-BH06E
12 to 24 VAC/VDC		M2BJ-B24	M2BJ-B24A	M2BJ-B24B	M2BJ-B24C	M2BJ-BH24D	M2BJ-BH24E
12 to 24 VDC		M2BJ-B24-D	---	M2BJ-B24B-D	---	M2BJ-BH24D-D	M2BJ-BH24E-D

*1. High-sound models incorporate an LED, which lights when the Buzzer sounds.

*2. Refer to "Short-circuiting Jumper (M2BJ-BTH)" on page 5 for the insert direction of the jumper.


External Signal Selection Model

(M2BJ-BH24D-DA)

- An external signal selection model is also available. With this model, it is possible to switch between continuous and intermittent sound using an external signal instead of the jumper.

M2BJ-BH24D-DA

- SW:
 - When A direction is ON (terminals 1, 2 ON): intermittent sound
 - When B direction is ON (terminals 2, 3 ON): continuous sound

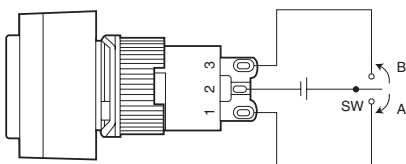

- Note: 1. Ensure that voltage is not applied simultaneously between terminals 1, 2, and 3.
 2. Check the power supply polarity. Connecting with the polarity reversed may result in damage.

Specifications

Buzzer

Item		Model	Standard-sound Models			
			M2BJ-B06	M2BJ-B06A	M2BJ-B06B	M2BJ-B06C
Operating voltage		6 VAC/VDC				
Sound pressure (at 0.1 m and rated voltage)		Continuous sound: 80 dB (phons) min.				
Driving frequency		2±0.5 kHz		4±0.5 kHz		
Intervals		190 times/minute±10%	*2 Long:55 times/minute±10% *1 Short:700 times/minute±10%	190 times/minute±10%	*4 Long:55 times/minute±10% *3 Short:700 times/minute±10%	
Current consumption	DC	7 mA max.		20 mA max.		
	AC	20 mA max.				
Inrush current		1 A max.				
Life expectancy		1,000 hours min.				
Insulation resistance		100 MΩ min. (between ground and current-carrying parts)				
Dielectric strength		1,000 VAC for 1 minute (between grounds)				
Ambient operating temperature		-10°C to 55°C (no icing or condensation)				
Ambient operating humidity		35% to 85%RH				
Ambient storage temperature		-25°C to 65°C (no icing or condensation)				
Degree of protection		IP 40				
Weight		Approx. 9 g				

Item		Model	Standard-sound Models					
			M2BJ-B24	M2BJ-B24A		M2BJ-B24B	M2BJ-B24C	M2BJ-B24-D
Operating voltage		12 to 24 VAC/VDC			12 to 24 VDC			
Sound pressure (at 0.1 m and rated voltage)		Continuous sound: 80 dB (phons) min.						
Driving frequency		2±0.5 kHz			4±0.5 kHz		2±0.5 kHz	4±0.5 kHz
Intervals		190 times/minute±10%	*2 Long:55 times/minute±10% *1 Short:700 times/minute±10%	190 times/minute±10%	*4 Long:55 times/minute±10% *3 Short:700 times/minute±10%	190 times/minute±10%		
Current consumption	DC	7 mA max.			20 mA max.		7 mA max.	20 mA max.
	AC	20 mA					---	---
Inrush current		1 A max.					---	---
Life expectancy		1,000 hours min.						
Insulation resistance		100 MΩ min. (between ground and current-carrying parts)						
Dielectric strength		1,000 VAC for 1 minute (between grounds)						
Ambient operating temperature		-10°C to 55°C (no icing or condensation)						
Ambient operating humidity		35% to 85%RH						
Ambient storage temperature		-25°C to 65°C (no icing or condensation)						
Degree of protection		IP 40						
Weight		Approx. 9 g						





Item		Model	High-sound Models					
			M2BJ-BH06D	M2BJ-BH24D	M2BJ-BH06E	M2BJ-BH24E	M2BJ-BH24D-D	M2BJ-BH24E-D
Operating voltage		6 VAC/VDC	12 to 24 VAC/VDC	6 VAC/VDC	12 to 24 VAC/VDC	12 to 24 VDC		
Sound pressure (The sound pressure can be adjusted. The figure for sound pressure given above is for measurement at a distance of 0.1 m at the rated voltage.)		70 to 95 dB (phons)						
Driving frequency		3±0.5 kHz						
Intervals		Approx. 190 times/min.	*6 Long: Approx. 55 times/min. *5 Short: Approx. 700 times/min.		Approx. 190 times/min.	*6 Long: Approx. 55 times/min. *5 Short: Approx. 700 times/min.		
Current consumption	DC	50 mA max.						
	AC	100 mA max.						---
Inrush current		1 A max.						---
Life expectancy		1,000 hours min.						
Insulation resistance		100 MΩ min. (between ground and current-carrying parts)						
Dielectric strength		1,000 VAC for 1 minute (between grounds)						
Ambient operating temperature		-10°C to 55°C (no icing or condensation)						
Ambient operating humidity		35% to 85%RH						
Ambient storage temperature		-25°C to 65°C (no icing or condensation)						
Degree of protection		IP 40						
Weight		Approx. 12 g						

* Tone




*1	Standard volume	High volume	Bird cry
*2			Telephone busy signal
*3			Short beeps
*4	High volume	Intermittent	Long beeps
*5			Alternating high-low pitch
*6			Long beeps

Dimensions

Standard-sound Models M2BJ-B

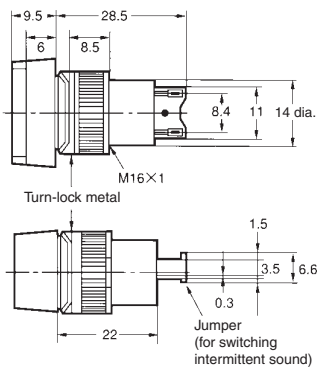


High-sound Models M2BJ-BH

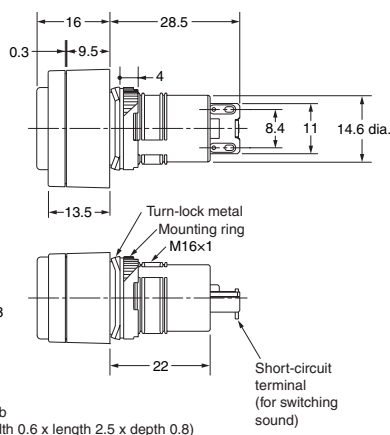

Note: The LED lights while the sound is produced. For intermittent sound, the LED flashes synchronized with the sound.


Contact Form

All Models
(Standard and High-sound Models)




Jumper

Terminal Hole Dimensions



Terminal Arrangement
(Bottom view)



Power supply

Note: There is no +/- polarity.