




Proto-Type Board

PSP-110002

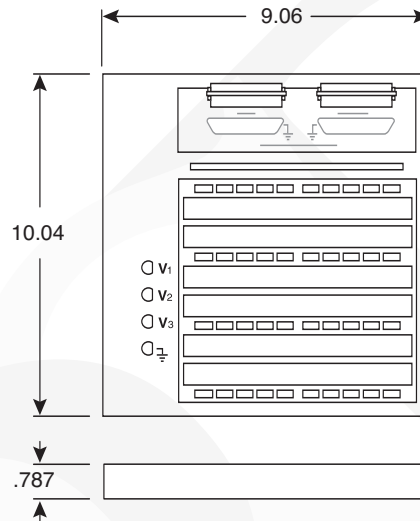

Dimensions: In.

Specifications:

- Type: UIB-34 universal interface breadboard
- External body & back plate: ABS polymer
- Internal contact terminal: silver alloy and nickel
- Resistance: <math><10\text{m}\Omega</math> ($\varnothing 0.6\text{mm}$ lead @ 1KHz)
- Capacitance: <math><10\text{pF}</math> ($\varnothing 0.6\text{mm}$ lead @ 1KHz)
- Insulation: >10T Ω (500VDC for 1 minute)
- Hi-Pot test: 1500VDC for 1 minute
- Breakdown current: 30mA
- Contact current: 3A ($\varnothing 0.6\text{mm}$ lead)
- Wire size acceptability: $\varnothing 0.3\text{mm}$ ~ 0.8mm
- Warning: do not use high voltage (AC>50V, DC>75V)
- Tie point: 5 point x 128 row (640) x 3 pcs. (base socket);
5 point x 20 row (100) x 4 pcs. (bus strip); 2320 total
- Weight: 600gm
- Height with UC-02: 1.18"
- Accessories: 1 edge plate (EP-3), 1 universal connector,
& 4 bind posts

Updated: 5-11-05

383-K2300-1

Available from Mouser Electronics

1-800-346-6873

www.mouser.com

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.