


SD-US/SC/LA/GY

Order No.: 2963860

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2963860>Rail-mountable socket, with light indicator, housing color: gray, with
screw connection, national version: USA, housing width 45 mm**Commercial data**

EAN	4017918859138
Pack	10 Pcs.
Customs tariff	85366990
Weight/Piece	0.07641 KG
Catalog page information	Page 513 (IF-2007)

Product notesWEEE/RoHS-compliant since:
07/20/2006

[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**General data**

Nominal voltage U_N	125 V AC
Nominal current I_N	15 A AC
Status display	Glow lamp or LED with preresistor
Material of contact	CuZn37
For country-specific use in	USA
Color	gray

Insulating material	PA
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C
Standards/regulations	IEC 83
	DIN 49440-1
	UL 498
Length	75 mm
Width	45 mm
Height	70.5 mm

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	30
Conductor cross section AWG/kcmil max	12
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M 3

Certificates / Approvals

Approval logo




requested approbations

Certification	CUL Listed, GOST, UL Listed
---------------	-----------------------------

Drawings

Circuit diagram

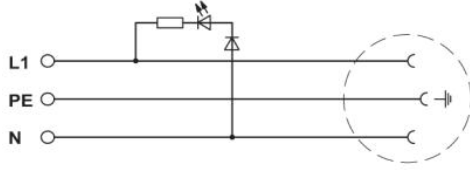

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2008 Phoenix Contact
Technical modifications reserved;