




643813-4 Product Details



643813-4

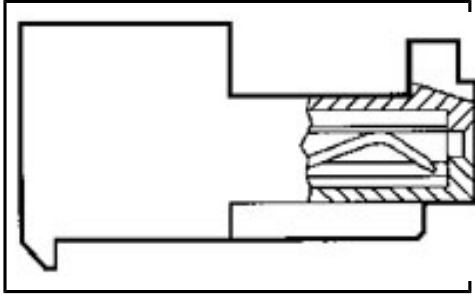

[Active](#)

MTA, CST-100 II, MT-6 and SL Connectors and Headers

[Not EU RoHS or ELV Compliant](#) ([Find RoHS Compliant Alternates](#))

Product Highlights:

- MTA-100 Connectors
- Number of Positions = 4
- Mating Type = Receptacle
- Connector Type = Closed End
- Wire-to-Board Application

[View all Features](#) | [Find Similar Products](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [MTA 100 CONNECTOR ASSEMBLY, 22 AWG, STANDARD](#) (PDF, English)

Catalog Pages/Data Sheets:

- [INTERCONNECTS FOR NETWORKING](#) (PDF, English)
- [MULTI-USER SYSTEMS](#) (PDF, English)
- [MTA-100 AND MTA-156 CONNECTORS AND HEADERS, CST-100 ...](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version G)
- [3D Model](#) (IGES, Version G)
- [3D Model](#) (STEP, Version G)

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Product Photo](#)

Related Products:

- [Tooling](#)
- [Mating Products \(64\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = MTA-100 Connectors
- [Number of Positions](#) = 4
- [Mating Type](#) = Receptacle
- [Connector Type](#) = Closed End
- [Wire Termination Type](#) = IDC Standard
- [Wire Size \(mm² \[AWG\]\)](#) = 0.3-0.4² [22]
- [Mating Polarization](#) = With
- [Mating Connector Lock](#) = With
- [Four Points of Contact](#) = Without
- [Shrouded](#) = No
- [Mounting Ears](#) = Without
- Mating Polarization Method = Polarizing Tab

Mechanical Attachment:

- [Panel Attachment](#) = Without

Electrical Characteristics:

- Voltage Rating (VAC) = 250

Termination Related Features:

- [Solder Tail Contact Plating](#) = Tin-Lead

Body Related Features:

- [Narrow](#) = No
- [Post Number\(s\) Omitted](#) = None
- Cable Exit Angle = 90°

Contact Related Features:

- [Contact Centerline Spacing \(mm \[in\]\)](#) = 2.54 [0.100]
- [Contact Mating Area Plating](#) = Tin-Lead
- [Contact Material](#) = Copper Alloy

Housing Related Features:

- Housing Color = Red
- Housing Flammability Rating = UL 94V-2
- Housing Material = Nylon

Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process

Conditions for Usage:

- [Terminate To](#) = Wire

Operation/Application:

- [Application](#) = Wire-to-Board

Packaging Related Features:

- Packaging Method = Loose Piece

Other:

- Brand = AMP