


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISONS		DOC. NO. SPC-F005	* Effective: 12/21/98		* DCP No: 680			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	A	Redrawn in Autocad	JAP	11/13/91				
1199	B	Redrawn & Renamed	JWM	11/9/01	JC	11/26/01	JC	11/26/01

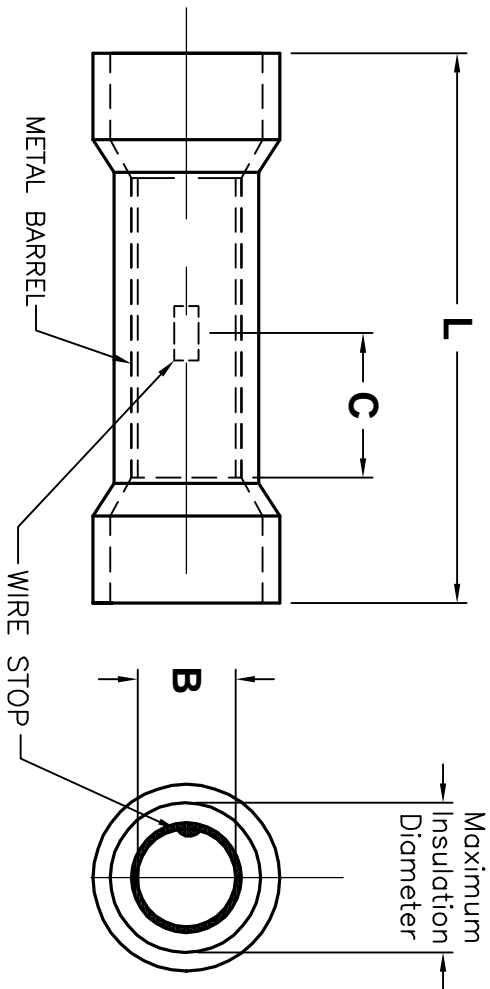

- NOTES:**
1. MATERIAL: COPPER
PVC INSULATOR
 2. FLAMMABILITY: UL94V-0
 3. FINISH: ELECTRO-TIN PLATED
 4. CONTINUOUS OPERATING TEMPERATURE:
-40° F (-40° C) TO 220° F (105° C)
 5. VOLTAGE RATING: 600 V

SPC Part Number	Wire Range (AWG)	Maximum Insulation Diameter	B	L	C	Insulating Material	Color	Seam
CCS-TV-1010	12 ~ 10	.250	.135	1.00	.25	Vinyl (PVC)	Yellow	Butted
CCS-TV-1414	16 ~ 14	.170	.090	1.00	.25		Blue	
CCS-TV-1818	22 ~ 18	.145	.070	1.02	.25	Vinyl (PVC)	Red	Brazed
CCS-ZV-0808	8	.385	.175	1.40	.38		Red	
CCS-ZV-1010	12 ~ 10	.250	.142	1.26	.38		Yellow	
CCS-ZV-1414	16 ~ 14	.170	.095	1.12	.031		Blue	
CCS-ZV-1818	22 ~ 18	.145	.062	1.06	.031		Red	Seamless



LISTED
ES9918



OSHA
Acceptable

LR22190M6

SPC-F005.DWG

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

Tolerances: Unless
Otherwise Specified:

.X = ±.015
.XX = ±.010
.XXX = ±.005

DRAWN BY: JC		DATE: 3/4/91		DRAWING TITLE: Vinyl Insulated Butt Connectors	
CHECKED BY: JOHN COLE		DATE: 11/21/91		SIZE DWG. NO. TA-442	
APPROVED BY: John Liska		DATE: 11/21/91		ELECTRONIC FILE TA-442.dwg	
SCALE: NTS		U.O.M.: INCHES [mm]		SHEET: 1 OF 1	



SPC TECHNOLOGY