
<u>Home</u> > <u>Products</u> > <u>By Type</u> > <u>PolySwitch Resettable Devices</u> > <u>Product Feature Selector</u> > Product Details

# **LR4-730F Product Details**

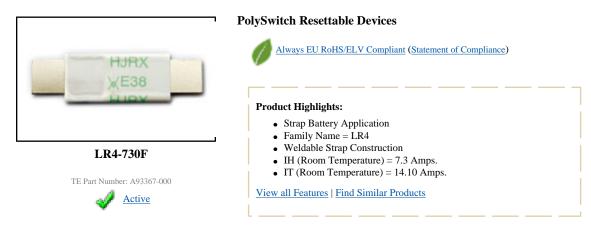

**Documentation & Additional Information** 

## **Product Drawings:**

- LR4-730F (PDF, English)
- Catalog Pages/Data Sheets:
  - None Available

# Product Specifications:

- None Available
- Application Specifications:
  - None Available

#### Instruction Sheets:

None Available

#### CAD Files:

None Available

# Additional Information:

Product Line Information

# **Related Products:**

• Tooling

#### List all Documents

# Product Features (Please use the Product Drawing for all design activity)

#### **Product Type Features:**

- UL Recognized = File No. E74889
- CSA File No. = 78165C

#### **Electrical Characteristics:**

- IH (Room Temperature) (Amps.) = 7.3
- <u>IT (Room Temperature) (Amps.)</u> = 14.10
- <u>Vmax Operating (V)</u> = 20
- <u>**Rmin**(•)</u> = 0.006
- <u>Rmax (•)</u> = 0.012
- <u>R1 Max [Post Trip] (•)</u> = 0.015
- <u>UL Rated Current (Amps.)</u> = 100
- Tripped Power Dissipation (Typical) (W) = 3.30

#### **Termination Related Features:**

• Construction = Weldable Strap

#### **Contact Related Features:**

• Family Name = LR4

- Industry Standards:
  - <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
  - <u>Lead Free Solder Processes</u> = Not relevant for lead free process
  - RoHS/ELV Compliance History = Always was RoHS compliant

#### **Conditions for Usage:**

• <u>Operating Temperature (Max.) (°C)</u> = 85

#### **Operation/Application:**

• Application = Strap Battery

### **Packaging Related Features:**

Packaging Method = Bulk

#### Other:

Brand = Raychem