
5749195-2 Product Details

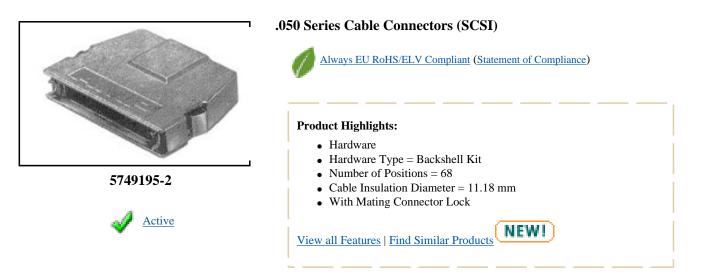

Documentation & Additional Information

Product Drawings:

• INDIVIDUAL KIT, UNASSEMBLED, 68 POSITION, STRAIGHT E... (PDF, English)

Catalog Pages/Data Sheets:

• None Available

Product Specifications:

• None Available

Application Specifications:

None Available

Instruction Sheets:

• None Available

CAD Files: (CAD Format & Compression Information)

- <u>2D Drawing</u> (DXF, Version O)
- <u>3D Model</u> (IGES, Version O)
- <u>3D Model</u> (STEP, Version O)

Additional Information:

Product Line Information

Related Products:

• <u>Tooling</u>

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- <u>Product Type</u> = Hardware
- Number of Positions = 68
- <u>Mating Connector Lock</u> = With
- <u>Mating Connector Lock Type</u> = Spring Latch
- <u>Shielded</u> = Yes
- <u>Product Series</u> = Series III
- Backshell Kit Exit Style = Straight (180°)
- Backshell Material = Zinc
- Screw Material = Stainless Steel
- Strain Relief Clip Material = Steel
- Latching Spring Material = Stainless Steel
- Comment = Each backshell kit includes upper and lower backshells, two spring latches, one strain relief staple and two 2-56 screws. All are packaged unassembled; Meets SCSI-2 standards

Mechanical Attachment:

• <u>Hardware Type</u> = Backshell Kit

Body Related Features:

- Cable Insulation Diameter (mm [in]) = 11.18 [0.440]
- Backshell Plating = Nickel over Copper
- Shell Plating = Tin over Nickel

Industry Standards:

- <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
- <u>Lead Free Solder Processes</u> = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

• Terminate To = Wire

Other:

• Brand = AMP