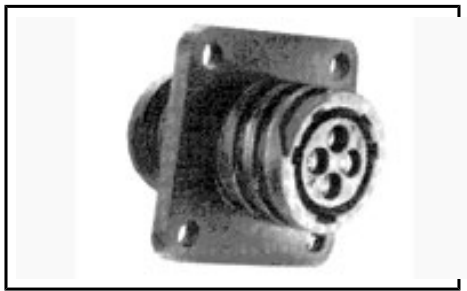*Our commitment. Your advantage.*

206430-3 Product Details

206430-3

✔ [Active](#)

CPC Connectors

🍃 [Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- Connector
- Number of Positions = 4
- Receptacle
- For Use With Socket Contacts
- Not Preloaded

[View all Features](#) | [Find Similar Products](#)   **NEW!**

Documentation & Additional Information

Product Drawings:

- [RECEPTACLE HOUSING, REVERSE SEX, SHELL SIZE 11, CPC](#) (PDF, English)

Catalog Pages/Data Sheets:

- [AMP SEALED CONNECTORS](#) (PDF, English)
- [CIRCULAR CONNECTORS FOR COMMERCIAL SIGNAL AND POWER ...](#) (PDF, English)
- [AMP Circular Connectors for Commercial Signal & Powe...](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- [Circular Plastic Connectors (CPC)](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version G)
- [3D Model](#) (IGES, Version G)
- [3D Model](#) (STEP, Version G)

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Contact Arrangement](#)

Related Products:

- [Tooling](#)
- [Mating Products (1)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Connector
- Number of Positions = 4
- Gender = Receptacle
- For Use With = Socket Contacts
- Termination Style = Wire
- Shell Size = 11
- Shell Type = All Plastic
- Product Series = Series 1
- Thread Size = 5/8 - 24 UNEF-2A
- Sealed = Yes

Mechanical Attachment:

- Preloaded = No
- VDE Tested = No
- Panel Attachment Method = Square Flange
- Keying = A

Termination Related Features:

- Seal Type = Peripheral

Body Related Features:

- Mount Style = Panel
- Peripheral Seal Material = Elastomer
- Peripheral Seal Color = Gray

Contact Related Features:

- Standard or Reverse Gender = Reverse

Housing Related Features:

- Housing Material = Thermoplastic
- Housing Color = Black
- Housing Flammability Rating = UL 94V-0

Configuration Related Features:

- Reverse Numbering = Without

Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Other:

- Brand = AMP