
749805-9 Product Details

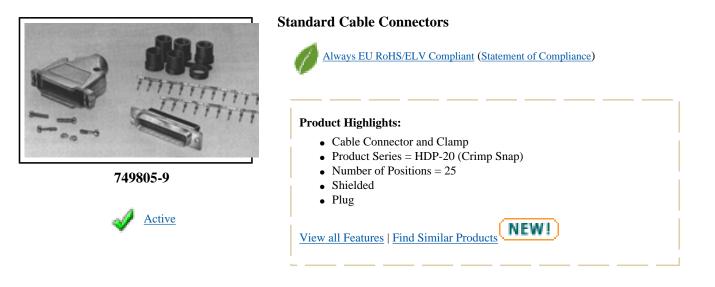

Documentation & Additional Information

Product Drawings:

• PLUG KIT, UNASSEMBLED, SIZE 3, 25 POSN, METAL SHELL,... (PDF, English)

Catalog Pages/Data Sheets:

• None Available

Product Specifications:

• <u>AMPLIMITE* HDP-20 Subminiature D Connector With F Cr...</u> (PDF, English)

Application Specifications:

- HD-20 Precision Formed Contacts (PDF, English)
- AMPLIMITE HDP-20 & Econo Crimp Snap Subminiature D C... (PDF, English)

Instruction Sheets:

- AMPLIMITE Connector HD-20 Shielded Cable Clamp Kits (PDF, English)
- AMPLIMITE High Density (HDP-20) Connectors with Crim... (PDF, English)
- PRO-CRIMPER II Hand Tool Assembly 58448-2 With Die A... (PDF, English)
- AMP* INSERTION/EXTRACTION TOOL 91285-1 AND REPLACEME... (PDF, English)

CAD Files: (CAD Format & Compression Information)

- <u>2D Drawing</u> (DXF, Version A)
- <u>3D Model</u> (IGES, Version A)
- <u>3D Model</u> (STEP, Version A)

Additional Information:

Product Line Information

Related Products:

• <u>Tooling</u>

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- <u>Product Type</u> = Cable Connector and Clamp
- <u>Product Series</u> = HDP-20 (Crimp Snap)
- Number of Positions = 25
- <u>Shielded</u> = Yes
- <u>Gender</u> = Plug
- <u>Wire Termination Type</u> = Crimp Snap
- <u>Mating Connector Lock</u> = With
- Mating Connector Lock Type = Mounting Holes
- Shell Size = 3
- <u>Shell Type</u> = Full Metal Shell
- Grounding Indents = With
- Grade = Standard
- Cable Clamp Type = One-Piece Quick Snap
- Grommets = With
- Screws and Retainer Clips = With
- Body Material = Polypropylene
- Cable Support Gate Material = Polypropylene
- Shell Material = Steel
- Retainer Clip Material = Stainless Steel
- Strain Relief Clip Material = Stainless Steel
- Screw Material = Steel

Mechanical Attachment:

- Mounting Screw Material = Steel
- Mounting Screw Plating = Zinc
- Screw Plating = Zinc

Termination Related Features:

• Solder Tail Contact Plating = Tin over Nickel

Body Related Features:

- <u>Wire Range (mm² [AWG])</u> = 0.2 0.56 [24-20]
- <u>Cable Insulation Diameter (mm [in])</u> = 6.48 11.94 [0.255 0.470]
- Cable Exit Angle = Straight(180°)
- Shell Plating = Tin over Copper

Contact Related Features:

- <u>Contacts</u> = With
- Contact Mating Area Plating = Gold Flash
- Contact Size = 20
- Contact Material = Brass

Housing Related Features:

- Housing Material = Nylon, Polyester GF
- Housing Flammability Rating = UL 94V-0
- Housing Color = Black

Industry Standards:

- <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
- <u>Lead Free Solder Processes</u> = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

- <u>Packaging Method</u> = Bulk
- Packaging Quantity = 100

Other:

• Brand = AMP