




# 5650908-5 Product Details



5650908-5

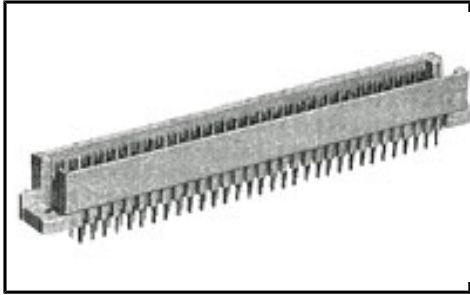

[Active](#)

## Eurocard Type R



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

### Product Highlights:

- Plug
- Number of Positions = 96
- PCB Mount Angle = Vertical
- No PCB Retention Feature
- Post Type = Solder Post

[View all Features](#) | [Find Similar Products](#)

**NEW!**

## Documentation & Additional Information

### Product Drawings:

- [ASSEMBLY, PIN, EUROCARD, TYPE R, 96 POSITION, 3.30\[...\]](#) (PDF, English)

### Catalog Pages/Data Sheets:

- None Available

### Product Specifications:

- None Available

### Application Specifications:

- [Eurocard Connectors Types B,C,M,Q,R, & Enhanced Typ...](#) (PDF, English)

### Instruction Sheets:

- None Available

### CAD Files: [\(CAD Format & Compression Information\)](#)

- [2D Drawing](#) (DXF, Version O)
- [3D Model](#) (IGES, Version O)
- [3D Model](#) (STEP, Version O)

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)
- [Mating Products \(11\)](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)**

**Product Type Features:**

- [Product Type](#) = Plug
- [Number of Positions](#) = 96
- [PCB Mount Angle](#) = Vertical
- [PCB Retention Feature](#) = No
- [Post Type](#) = Solder Post
- [Mating Polarization](#) = Without
- [Guides](#) = Without
- [Make First / Break Last](#) = No
- [DIN Level](#) = II
- Color = Gray

**Termination Related Features:**

- [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 3.30 [0.130]
- Solder Tail Contact Plating = Tin

**Body Related Features:**

- [Rows Loaded](#) = A, B, C
- Contact Cross Section (mm [in]) = 0.64 [.025] Sq.

**Contact Related Features:**

- Contact Material = Copper Alloy
- Contact Mating Area Plating = DIN 41612 Class 2

**Housing Related Features:**

- Housing Material = Polymer
- Housing Flammability Rating = UL 94V-0

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- [Flux-Tight Coating](#) = Without
- RoHS/ELV Compliance History = Always was RoHS compliant

**Other:**

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2007 Tyco Electronics Corporation All Rights Reserved