

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

My Account

- [Sign In](#)
- [Register](#)


Customer Support

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [Eurocard Connectors](#) > [Product Feature Selector](#) > Product Details

650473-5 Product Details


Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

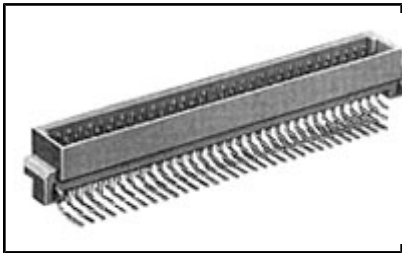

650473-5

 [Active](#)

 [View 3D PDF](#)

Eurocard Type C



[5 of 6 EU RoHS/ELV Compliant \(Find RoHS Compliant Alternates/Statement of Compliance\)](#)

Product Highlights:

- Type C Connectors
- Plug
- Number of Positions = 96
- Rows Loaded = A, B, C
- Terminate To Printed Circuit Board

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(37\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [PIN ASSEMBLY, EUROCARD, TYPE C](#) (PDF, English)

Catalog Pages/Data Sheets:

- [INTERCONNECTS FOR NETWORKING](#) (PDF, English)
- [MULTI-USER SYSTEMS](#) (PDF, English)
- [EUROCARD CONNECTORS PER DIN 41612 AND IEC 603-2](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- [Eurocard Connectors Types B,C,M,Q,R, & Enhanced Typ...](#) (PDF, English)

Instruction Sheets:

- [Soldering and Cleaning Eurocard Connectors](#) (PDF, English)

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version H)
- [3D Model](#) (IGES, Version H)
- [3D Model](#) (STEP, Version H)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)
- [Mating Products \(37\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)**Product Type Features:**

- [Product Type](#) = Type C Connectors
- [Gender](#) = Plug
- [Number of Positions](#) = 96
- [PCB Retention Feature](#) = No
- [PCB Mount Angle](#) = Right Angle
- [Post Type](#) = Solder Post
- [Size](#) = Standard
- [Make First / Break Last](#) = No
- [Bus Type](#) = FUTUREBUS, MULTIBUS (II), NUBUS, VMEbus, VXIBus
- [DIN Level](#) = II
- [Mounting Ears](#) = Without
- Guides = Without
- Toolless (Flat Rock) = No
- Color = Gray

Termination Related Features:

- [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 2.65 [0.104]

Body Related Features:

- [Rows Loaded](#) = A, B, C
- [Contact Cross Section \(mm \[in\]\)](#) = 0.64 [.025] Sq.

Contact Related Features:

- Contact Material = Brass

Housing Related Features:

- Housing Material = Polyester
- Housing Flammability Rating = UL 94V-0

Industry Standards:

- [RoHS/ELV Compliance](#) = ELV compliant, 5 of 6 Compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C
- [Flux-Tight Coating](#) = Without

Conditions for Usage:

- [Terminate To](#) = Printed Circuit Board
- [High Temperature Housing](#) = No

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved