


## 5650945-5 Product Details

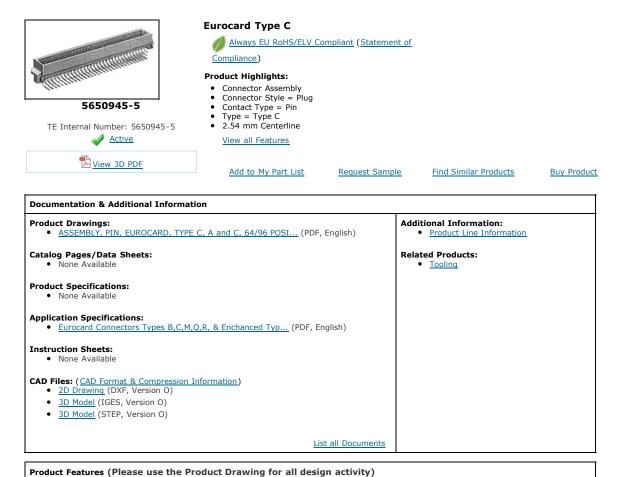

**Product Type Features: Contact Related Features:** Connector Type = Connector Assembly Contact Type = Pin Contact Base Material = Brass • PCB Mount Retention = Without <u>PCB Mounting Orientation</u> = Right Angle • <u>Post Type</u> = Solder Post Housing Related Features: Connector Style = Plug • <u>Size</u> = Standard • Housing Material = Polymer • <u>Make First / Break Last</u> = No • UL Flammability Rating = UL 94V-0 • <u>DIN Level</u> = II ٠ Mounting Ears = Without Industry Standards: • Guides = Without <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant Toolless (Flat Rock) = No Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C Termination Related Features: • <u>Flux-Tight Coating</u> = Without • Termination Post Length (mm [in]) = 2.65 [0.104] • RoHS/ELV Compliance History = Always was RoHS compliant **Body Related Features:** Conditions for Usage: <u>Type</u> = Type C • <u>Applies To</u> = Printed Circuit Board • Centerline (mm [in]) = 2.54 [0.100] • High Temperature Housing = No • Number of Rows = 3 <u>Number of Positions</u> = 64 Other: Brand = AMP ٠ Rows Loaded = A, C Contact Cross Section (mm [in]) = 0.64 [.025] Sq.