

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

## My Account

- [Sign In](#)
- [Register](#)


## Customer Support

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors](#) > [Product Feature Selector](#) > Product Details

# 5-104362-4 Product Details


**Live Product Chat** US Only  
 8:30am - 5pm ET, Mon - Fri

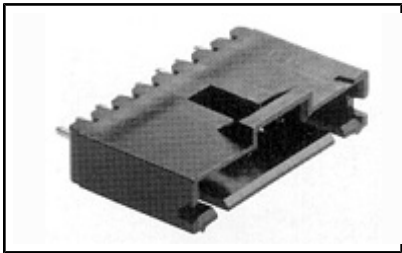

**5-104362-4**

 [Active](#)

### **.100 AMPMODU Headers, Housings & Contacts**



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### **Product Highlights:**

- Header
- Number of Positions = 5
- Number of Rows = Single
- Post Size = 0.64 [.025] mm [in]
- Terminate To Printed Circuit Board

[View all Features](#) | [Find Similar Products](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

#### **Documentation & Additional Information**

**Product Drawings:**

- [HEADER ASSY, AMPMODU MTE, VERTICAL SINGLE ROW, .100 ...](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- None Available

**Product Specifications:**

- None Available

**Application Specifications:**

- [AMPMODU MTE Interconnection System](#) (PDF, English)

**Instruction Sheets:**

- None Available

**CAD Files:** ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version U)
- [3D Model](#) (IGES, Version U)
- [3D Model](#) (STEP, Version U)

**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)****Product Type Features:**

- [Product Type](#) = Header
- [Number of Positions](#) = 5
- [Post Size \(mm \[in\]\)](#) = 0.64 [.025]
- [PCB Mount Angle](#) = Vertical
- [PCB Retention Feature](#) = Yes
- [PCB Mount Style](#) = Thru Hole (SMT Compatible)
- [Mating Polarization](#) = With
- [Mating Polarization Method](#) = Latched
- [Connector Series](#) = MTE
- Wire Termination Type = Crimp, Insulation Displacement Crimp (IDC)
- Comment = Use Keying Tool No. 91417-1 to remove post for keying.

**Electrical Characteristics:**

- Contact Current Rating (Amps.) = 3
- Termination Resistance (m $\Omega$ ) = 15
- Insulation Resistance (M $\Omega$ ) = 5,000
- Dielectric Withstanding Voltage (V) = 600

**Termination Related Features:**

- Solder Tail Contact Plating = Tin-Lead

**Body Related Features:**

- [Number of Rows](#) = Single
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 [.100]

**Contact Related Features:**

- [PCB Orientation Feature](#) = No
- [Contact Mating Area Plating Material](#) = Gold (15)
- Contact Material = Brass
- Approved Standards = UL E28476, CSA LR7189
- Contact Shape = Square

**Housing Related Features:**

- [Housing Color](#) = Black
- Housing Flammability Rating = UL 94V-0
- Housing Material = Thermoplastic

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Pin-in-Paste capable to 245°C
- RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- [Terminate To](#) = Printed Circuit Board
- Temperature Rating = High
- Operating Temperature (°C) = -65 – +105

**Packaging Related Features:**

- Packaging Method = Tube

**Other:**

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved