
87175-2 Product Details

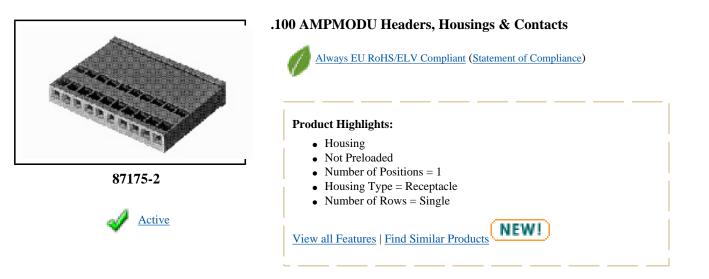

Documentation & Additional Information

Product Drawings:

• HOUSING-LOCKING CLIP .025 SQ. POST, .100 CENTERS (CL... (PDF, English)

Catalog Pages/Data Sheets:

• AMPMODU INTERCONNECTION SYSTEM (PDF, English)

Product Specifications:

- Connector, Locking Clip, .025 Square (PDF, English)
- Connector, Locking Clip, .025 Inch Square, Tin (PDF, English)
- Connector, Locking Clip, .031 x .062 (PDF, English)

Application Specifications:

• Locking Clip 0.64-mm (.025-in.) Square Contacts and ... (PDF, English)

Instruction Sheets:

• AMPMODU Locking Clip Contacts and Housings for 0.64m... (PDF, English)

CAD Files:

• None Available

Additional Information:

Product Line Information

Related Products:

• <u>Tooling</u>

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Housing
- <u>Number of Positions</u> = 1
- <u>Mating Connector Lock</u> = Without
- Mating Polarization = Without
- $\underline{\text{Keyed}} = \text{No}$
- <u>Connector Series</u> = Locking Clip
- Wire Termination Type = Crimp
- Stamped = No
- Housing Configuration = Both Ends Closed

Mechanical Attachment:

- Preloaded = No
- Electrical Characteristics:
 - Voltage Rating (VAC) = 250
 - Contact Current Rating (Amps.) = 3
 - Termination Resistance $(m \bullet) = 12$
 - Insulation Resistance (M•) = 5,000
 - Dielectric Withstanding Voltage (V) = 750

Body Related Features:

- <u>Housing Type</u> = Receptacle
- <u>Number of Rows</u> = Single
- <u>Centerline, Matrix (mm [in])</u> = 2.54 [.100]

Provide Website Feedback | Contact Customer Support Home | Customer Support | Suppliers | Site Map | Privacy Policy | Browser Support © 2007 Tyco Electronics Corporation All Rights Reserved

.

Contact Related Features:

• Approved Standards = UL E28476, CSA LR7189

Housing Related Features:

- Housing Color = Black
- Housing Flammability Rating = UL 94V-0
- Housing Material = Polyester

Industry Standards:

- <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
- <u>Lead Free Solder Processes</u> = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Operating Temperature (°C) = -65 +105
- Other:
 - Brand = AMP