350778-1 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri
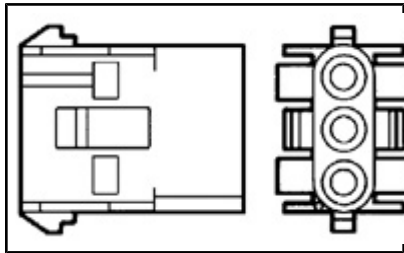
350778-1

✔ Active

[PDF] View 3D PDF

.250" Centerline, 600 V, 19 - 36 A max

🍃 Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Housing
- Universal MATE-N-LOK
- Not CompactPCI
- 6.35 mm Centerline, Matrix
- Number of Circuits = 2

View all Features | Find Similar Products

Quick Links

- Check Pricing & Availability
- Search for Tooling
- View Mating Products (2)
- View Contacts (186)
- Product Feature Selector
- Contact Us About This Product

Documentation & Additional Information

Product Drawings:
- CAP,2 CIRCUIT, UNIVERSAL MATE-N-LOK (PDF, English)

Catalog Pages/Data Sheets:
- INTERCONNECTS FOR NETWORKING (PDF, English)
- MULTI-USER SYSTEMS (PDF, English)
- AMP SEALED CONNECTORS (PDF, English)
- SOFT SHELL PIN AND SOCKET CONNECTORS (PDF, English)

Product Specifications:
- None Available

Application Specifications:
- Universal MATE-N-LOK Connectors (PDF, English)

Instruction Sheets:
- MATE-N-LOK Contact and Housing Selection Charts (PDF, English)
- Universal MATE-N-LOK Connectors (PDF, English)

CAD Files: (CAD Format & Compression Information)
- 2D Drawing (DXF, Version V1)
- 3D Model (IGES, Version V1)
- 3D Model (STEP, Version V1)

Additional Information:
- Product Line Information

Related Products:
- Tooling
- Mating Products (2)
- Contacts (186)

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:
- Product Type = Housing
- Connector Line = Universal MATE-N-LOK
- Number of Circuits = 2
- Mount = Free or Panel
- Color = White
- Lock Type = Positive Lock

Electrical Characteristics:
- High Current = No
- Current Rating (Amps.) = 19
- Voltage (VAC) = 600

Body Related Features:
- Centerline, Matrix (mm [in]) = 6.35 [.250]
- Housing Type = Receptacle (Cap)
- Contact Diameter (mm [in]) = 2.13 [0.084]

Contact Related Features:
- CompactPCI = No
- Contact Layout = In-Line
- Sealable = Yes

Housing Related Features:
- Housing Material = Nylon
- Housing Flammability Rating = UL 94V-0

Industry Standards:
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:
- Packaging Quantity = 100
- Packaging Method = One Piece Housing

Other:
- Brand = AMP