

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

[My Account](#)

- [Sign In](#)
- [Register](#)


[Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [Power Products \(>10 Amps/Contact\)](#) > [Product Feature Selector](#) > Product Details

350866-1 Product Details

 **Live Product Chat** US Only
8:30am - 5pm ET, Mon - Fri

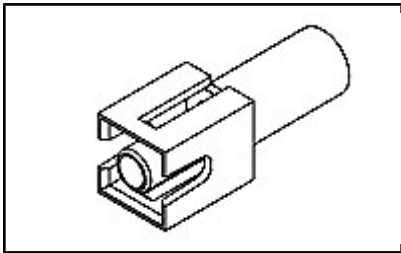

350866-1



.250" Centerline, 600 V, 19 - 36 A max



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Housing
- Universal MATE-N-LOK
- Not CompactPCI
- Number of Circuits = 1
- In-Line Contact Layout

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(1\)](#)
- [View Contacts \(186\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [CAP.SINGLE CIRCUIT](#), (PDF, English)

Catalog Pages/Data Sheets:

- [INTERCONNECTS FOR NETWORKING](#) (PDF, English)
- [MULTI-USER SYSTEMS](#) (PDF, English)
- [SOFT SHELL PIN AND SOCKET CONNECTORS](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- [Universal MATE-N-LOK Connectors](#) (PDF, English)

Instruction Sheets:

- [MATE-N-LOK Contact and Housing Selection Charts](#) (PDF, English)
- [Universal MATE-N-LOK Connectors](#) (PDF, English)

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Panel Cutout](#)

Related Products:

- [Tooling](#)
- [Mating Products \(1\)](#)
- [Contacts \(186\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)**Product Type Features:**

- Product Type = Housing
- Connector Line = Universal MATE-N-LOK
- Number of Circuits = 1
- Mount = Free Hanging
- Color = White
- Lock Type = Detent Lock

Electrical Characteristics:

- High Current = No
- Current Rating (Amps.) = 19
- Voltage (VAC) = 600

Body Related Features:

- Housing Type = Receptacle (Cap)
- Contact Diameter (mm [in]) = 2.13 [0.084]

Contact Related Features:

- CompactPCI = No
- Contact Layout = In-Line
- Sealable = No

Housing Related Features:

- Housing Material = Nylon
- Housing Flammability Rating = UL 94V-0

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

- Packaging Quantity = 100
- Packaging Method = One Piece Housing

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved