
770274-1 Product Details

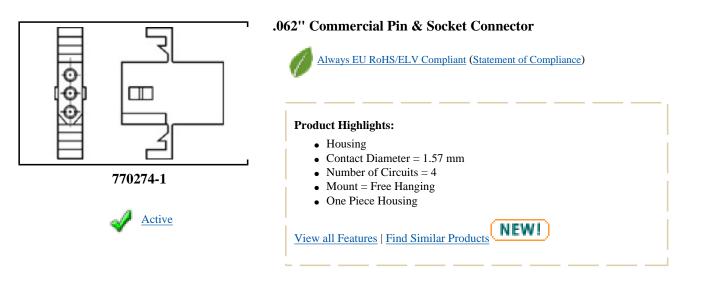

Documentation & Additional Information

Product Drawings:

• RECEPTACLE,4 CIRCUIT,.062 PIN AND SOCKET (PDF, English)

Catalog Pages/Data Sheets:

• SOFT SHELL PIN AND SOCKET CONNECTORS (PDF, English)

Product Specifications:

• Terminal, Pin & Socket, .062 Dia (PDF, English)

Application Specifications:

• .062 Diameter Pin and Socket Contacts and Housings (PDF, English)

Instruction Sheets:

None Available

CAD Files: (CAD Format & Compression Information)

- <u>2D Drawing</u> (DXF, Version C)
- <u>3D Model</u> (IGES, Version C)
- <u>3D Model</u> (STEP, Version C)

Additional Information:

Product Line Information

Related Products:

- <u>Tooling</u>
 - Mating Products (2)
- <u>Contacts (22)</u>

List all Documents

Product Type Features:

- Product Type = Housing
- Number of Circuits = 4
- Mount = Free Hanging
- Lock Type = Detent Lock
- Gender = Receptacle
- Connector Line = Commercial Pin and Socket
- Color = Natural
- Comment = See AMP Guide 65422 for cross references to Industry Standard .062/.093 product.

Electrical Characteristics:

• Voltage (VAC) = 250

Body Related Features:

- Contact Diameter (mm [in]) = 1.57 [0.062]
- Centerline, Matrix (mm [in]) = 3.68 [.145]

Contact Related Features:

• Contact Layout = In-Line

Housing Related Features:

- Housing Material = Nylon
 - Housing Flammability Rating = UL 94V-2

Industry Standards:

- <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

• Packaging Method = One Piece Housing

Other:

• Brand = AMP