
# 5221111-1 Product Details

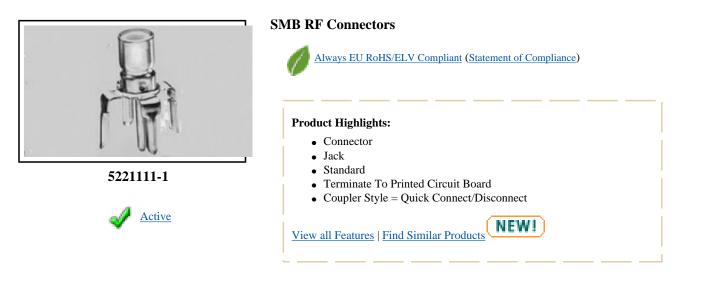

#### **Documentation & Additional Information**

# **Product Drawings:**

• JACK, PCB, VERTICAL SMB (PDF, English)

#### **Catalog Pages/Data Sheets:**

• SMB Connectors (PDF, English)

#### **Product Specifications:**

• None Available

#### **Application Specifications:**

• None Available

#### Instruction Sheets:

• None Available

#### CAD Files:

• None Available

#### Additional Information:

Product Line Information

#### **Additional Product Images:**

• PCB Layout

#### **Related Products:**

<u>Tooling</u>

List all Documents

**Product Features (Please use the Product Drawing for all design activity)** 

### **Product Type Features:**

- <u>Product Type</u> = Connector
- <u>Gender</u> = Jack
- Connector Series = Standard
- <u>Body Style</u> = Straight
- <u>Grade</u> = Commercial
- <u>PCB Mount Angle</u> = Vertical
- Board Standoff = Without
- PCB Mount Style = Thru Hole
- Dielectric Material = TEFLON

# Mechanical Attachment:

• <u>Panel Attachment</u> = Without

#### **Electrical Characteristics:**

- <u>Connector Impedance (•)</u> = 50
- Environmental Seal = Without

# **Body Related Features:**

- Coupler Style = Quick Connect/Disconnect
- <u>Pin Protection</u> = Without
- Solder Lug = Without
- <u>Body Plating</u> = Nickel

# Provide Website Feedback | Contact Customer Support Home | Customer Support | Suppliers | Site Map | Privacy Policy | Browser Support © 2007 Tyco Electronics Corporation All Rights Reserved

# **Contact Related Features:**

- <u>Center Contact Plating</u> = Gold
- Contacts = With

## **Industry Standards:**

- <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

#### Conditions for Usage:

• <u>Terminate To</u> = Printed Circuit Board

# Other:

• Brand = AMP