
5227677-1 Product Details

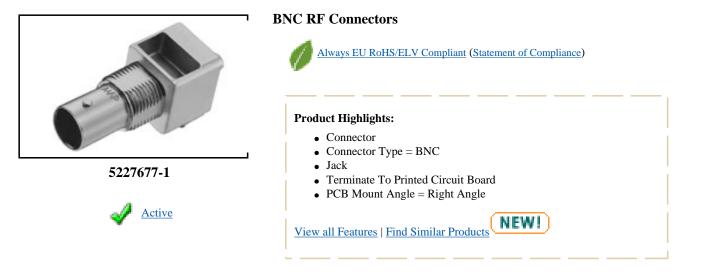

Documentation & Additional Information

Product Drawings:

• JACK, RIGHT ANGLE, PCB 50 OHM, SERIES BNC (PDF, English)

Catalog Pages/Data Sheets:

• **BNC Connectors** (PDF, English)

Product Specifications:

• None Available

Application Specifications:

• None Available

Instruction Sheets:

None Available

CAD Files: (CAD Format & Compression Information)

- 2D Drawing (DXF, Version A)
- <u>3D Model</u> (IGES, Version A)
- <u>3D Model</u> (STEP, Version A)

Additional Information: • Product Line Information

Related Products:

<u>Tooling</u>

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- <u>Product Type</u> = Connector
- <u>Connector Type</u> = BNC
- <u>Gender</u> = Jack
- <u>PCB Mount Angle</u> = Right Angle
- <u>Grade</u> = Commercial
- <u>PCB Height (mm [in])</u> = 15.88 [0.625]
- <u>PCB Retention Feature</u> = Yes
- <u>Mounting Post Style</u> = Standard
- Mounting Post Length (mm [in]) = 3.48 [0.137]
- <u>Body Material</u> = Diecast Zinc
- <u>Body Insulation</u> = Without
- $\underline{Sealed} = No$
- Isolated = No
- <u>Dielectric Material</u> = Polymethylpentene
- Number of Ports = 1
- Solder Terminal = Without
- Comment = If an Insulating Bushing is required, see Part Number 330620.

Mechanical Attachment:

- Surface Mountable = No
- <u>Panel Attachment</u> = With
- Panel Attachment Method = Lockwasher and Nut
- Panel Attachment Style = Rear Mount

Provide Website Feedback | Contact Customer Support Home | Customer Support | Suppliers | Site Map | Privacy Policy | Browser Support © 2007 Tyco Electronics Corporation All Rights Reserved

Electrical Characteristics:

• <u>Connector Impedance (•)</u> = 50

Body Related Features:

- <u>Hardware Included</u> = No
- <u>PCB Retention Method</u> = Hold Down Post
- <u>Body Plating</u> = Nickel
- <u>Polarized</u> = No

Contact Related Features:

- <u>Center Contact Material</u> = Phosphor Bronze
- <u>Center Contact Plating</u> = Gold (30)

Industry Standards:

- Government/Industry Qualification = No
- <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

• <u>Terminate To</u> = Printed Circuit Board

Other:

• Brand = AMP