
# 5227161-6 Product Details

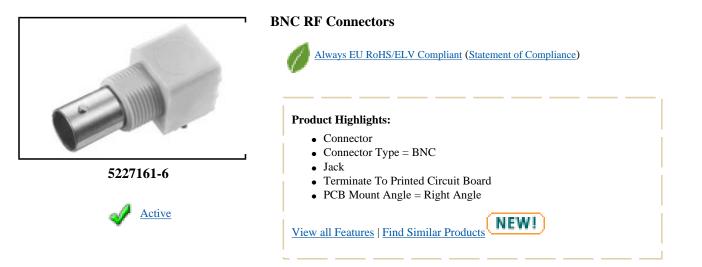

## **Documentation & Additional Information**

## **Product Drawings:**

• JACK, RIGHT ANGLE, 50 OHM, PCB, BNC (PDF, English)

#### Catalog Pages/Data Sheets:

• BNC Connectors (PDF, English)

#### **Product Specifications:**

• None Available

#### **Application Specifications:**

• None Available

#### Instruction Sheets:

None Available

## CAD Files: (CAD Format & Compression Information)

- 2D Drawing (DXF, Version A)
- <u>3D Model</u> (IGES, Version A)
- <u>3D Model</u> (STEP, Version A)

Additional Information: • Product Line Information

**Related Products:** 

<u>Tooling</u>

List all Documents

**Product Features (Please use the Product Drawing for all design activity)** 

#### **Product Type Features:**

- <u>Product Type</u> = Connector
- <u>Connector Type</u> = BNC
- <u>Gender</u> = Jack
- <u>PCB Mount Angle</u> = Right Angle
- <u>Grade</u> = Commercial
- <u>PCB Height (mm [in])</u> = 15.88 [0.625]
- <u>PCB Retention Feature</u> = Yes
- <u>Mounting Post Style</u> = Standard
- Mounting Post Length (mm [in]) = 3.48 [0.137]
- <u>Body Material</u> = VALOX
- <u>Body Insulation</u> = Without
- $\underline{Sealed} = No$
- Isolated = No
- <u>Dielectric Material</u> = Polymethylpentene
- $\underline{\text{Color}} = \text{Black}$
- Number of Ports = 1
- Solder Terminal = Without
- Comment = If an Insulating Bushing is required, see Part Number 330620.

#### Mechanical Attachment:

- Surface Mountable = No
- Panel Attachment = With
- Panel Attachment Method = Lockwasher and Nut
- Panel Attachment Style = Rear Mount

## **Electrical Characteristics:**

• <u>Connector Impedance (•)</u> = 50

#### **Body Related Features:**

- <u>Hardware Included</u> = No
- <u>PCB Retention Method</u> = Hold Down Post
- Polarized = No

#### **Contact Related Features:**

- <u>Center Contact Material</u> = Phosphor Bronze
- <u>Center Contact Plating</u> = Gold (30)

## Industry Standards:

- Government/Industry Qualification = No
- <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

#### Conditions for Usage:

• <u>Terminate To</u> = Printed Circuit Board

## Other:

• Brand = AMP

Provide Website Feedback | Contact Customer Support Home | Customer Support | Suppliers | Site Map | Privacy Policy | Browser Support © 2007 Tyco Electronics Corporation All Rights Reserved