




**Panel Mount Indicator, Non-Relampable
Neon Technology
Mounting Hole, Ø 0.380"**



All dimensions are in inches

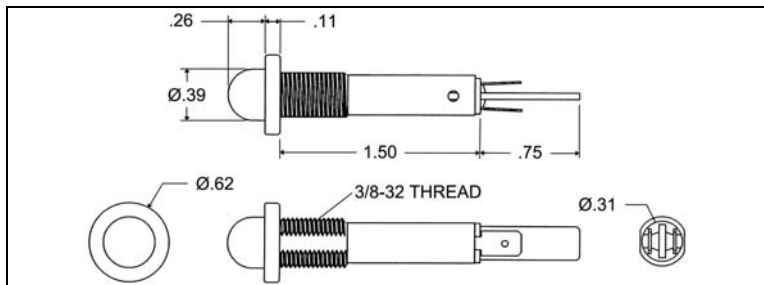

Recommended panel thickness: 0.030" to 0.250"

.187 x .020 terminals are standard

Storage temperature T_{STG} : -25°C - +80°C
 Ambient temperature T_A : -20°C - +60°C
 Voltage tolerance V_{OP} : ±10%

Part No.	Lens Color	Voltage	Current mA	Rated Life
Neon 115VAC Series				
WL-6010QM1	Red	105-125VAC	1.5mA	25,000 Hrs
WL-6010QM3	Amber	105-125VAC	1.5mA	25,000 Hrs
WL-6012QM5	Green	105-125VAC	1.5mA	25,000 Hrs
Neon 230VAC Series				
WL-6011QM1	Red	208-250VAC	1.5mA	25,000 Hrs
WL-6011QM3	Amber	208-250VAC	1.5mA	25,000 Hrs
WL-6013QM5	Green	208-250VAC	1.5mA	25,000 Hrs

Body Material: Nylon, white
 Lens Material: Polycarbonate
 Bezel Material: Stainless steel
 Terminals: Quick-connect, tinned brass
 Gaskets: Buna-N

Certifications: Most Wamco indicators carry Agency approvals. Please contact Wamco for the latest Agency information regarding the specific product series and voltage required.
 Options: Additional options and lens styles available. Please contact Wamco for more information.

Drawn	SC	03/01/10	Panel Mount Indicators Neon	Datasheet: WL-601XQMX Series	Rev: 1
Checked	EB	03/01/10			
Approved	EB	03/02/10			