



Three Phase Rectifier Bridge with IGBT and Fast Recovery Diode for Braking System

V_{RRM} = 1200/1600 V
I_{dAVM} = 188 A

Preliminary Data

V _{RRM}	Type	V _{RRM}	Type
V		V	
1200	VUB 120-12 NO2(T)	1600	VUB 120-16 NO2(T)
1200	VUB 160-12 NO2(T)	1600	VUB 160-16 NO2(T)

(T) = NTC optional

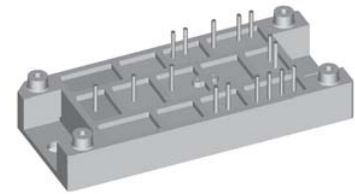

Symbol	Conditions	Maximum Ratings		
V_{RRM} I_{dAVM} I_{FSM} I²t P_{tot}	Rectifier Diodes	1200/1600 V		
		T _C = 80°C, rect., d = 1/3	188 A	
		T _{VJ} = 45°C, t = 10 ms, V _R = 0 V	1100 A	
		T _{VJ} = 150°C, t = 10 ms, V _R = 0 V	960 A	
		T _{VJ} = 45°C, t = 10 ms, V _R = 0 V	6050 A	
T _{VJ} = 150°C, t = 10 ms, V _R = 0 V	4610 A			
T _C = 25°C per diode	160 W			
V_{CES} V_{GE} I_{C25} I_{C80} I_{CM} P_{tot}	IGBT	VUB 120	VUB160	
		T _{VJ} = 25°C to 150°C	1200 V	1200 V
		Continuous	± 20 V	± 20 V
		T _C = 25°C, DC	140 A	177 A
		T _C = 80°C, DC	100 A	125 A
		T _C = 80°C, d = 0.5	95 A	95 A
t _p = Pulse width limited by T _{VJM}	280 A	350 A		
T _C = 25°C	570 W	690 W		
V_{RRM} I_{FAV} I_{FRMS} I_{FSM} P_{tot}	Fast Recovery Diode	1200 V		
		T _C = 80°C, rect. d = 1/2	34 A	
		T _C = 80°C, rect. d = 1/2	48 A	
		T _{VJ} = 45°C, t = 10 ms	200 A	
		T _{VJ} = 150°C, t = 10 ms	180 A	
T _C = 25°C	140 W			
T_{VJ} T_{VJM} T_{stg}	Module	-40...+150 °C		
		150 °C		
		-40...+125 °C		
V_{ISOL}	Module	50/60 Hz	t = 1 min	
		I _{ISOL} ≤ 1 mA	t = 1 s	
M_d	Module	Mounting torque (M5)	2-2.5 Nm	
		(10-32 UNF)	18-22 lb.in.	
d_s	Module	Creep distance on surface	12.7 mm	
d_A		Strike distance in air	9.4 mm	
a		Maximum allowable acceleration	50 m/s ²	
Weight	Module	typ.	80 g	

Features

- Soldering connections for PCB mounting
- Isolation voltage 3600 V~
- Ultrafast diode
- Convenient package outline
- UL registered E 72873
- Case and potting UL94 V-0
- optional NTC

Applications

- Drive Inverters with brake system

Advantages

- 2 functions in one package
- Easy to mount with two screws
- Suitable for wave soldering
- High temperature and power cycling capability


Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions.

© 2006 IXYS All rights reserved

Symbol	Conditions	Characteristic Values			
		(T _{VJ} = 25°C, unless otherwise specified)			
		min.	typ.	max.	
I_R V_F V_{T0} r_T R_{thJC} R_{thCH}	Rectifier Diodes	V _R = V _{RRM} , T _{VJ} = 25°C		0.3 mA	
		V _R = V _{RRM} , T _{VJ} = 150°C		5 mA	
		I _F = 150 A, T _{VJ} = 25°C		1.46 V	
		For power-loss calculations only		0.87 V	
		T _{VJ} = 150°C		4.0 mΩ	
		per diode		0.6 K/W	
		0.2		K/W	
V_{BR(CES)} V_{GE(th)}	V _{GS} = 0 V, I _C = 1 mA	1200		V	
	I _C = 4 mA	4.5		6.5 V	
I_{CES}	V _{CE} = 1200 V, T _{VJ} = 25°C			0.2 mA	
	T _{VJ} = 125°C			1 mA	
V_{CEsat}	V _{GE} = 15 V, I _C = 50 A	VUB 120		2.1 V	
	I _C = 75 A	VUB 160		2.2 V	
t_{SC} (SCSOA)	V _{GE} = 15 V, V _{CE} = 900 V, T _{VJ} = 125°C, R _G = 15/10 Ω, non repetitive			10 μs	
RBSOA	V _{GE} = 15 V, V _{CE} = 1200 V, T _{VJ} = 125°C, Clamped Inductive load, L = 100 μH				
	R _G = 15 Ω	VUB 120		150 A	
	R _G = 10 Ω	VUB 160		200 A	
C_{ies}	V _{CE} = 25 V, f = 1 MHz, V _{GE} = 0 V	VUB 120	5.7	nF	
		VUB 160	7.4	nF	
t_{d(on)} t_{d(off)} E_{on} E_{off}	V _{CE} = 600 V, I _C = 50/75 A V _{GE} = 15 V, R _G = 15/10 Ω Inductive load; L = 100 μH T _{VJ} = 125°C	VUB 120	170	ns	
		VUB 160	330	ns	
		VUB 120	680	ns	
		VUB 160	750	ns	
		VUB 120	11	mJ	
		VUB 160	12	mJ	
	VUB 120	8	mJ		
	VUB 160	10	mJ		
R_{thJC} R_{thCH}		VUB 120		0.22 K/W	
		VUB 160		0.18 K/W	
		VUB 120	0.1	K/W	
		VUB 160	0.1	K/W	
I_R V_F V_{T0} r_T I_{RM} t_{rr} R_{thJC} R_{thCH}	Fast Recovery Diode	V _R = V _{RRM} , T _{VJ} = 25°C		0.5 mA	
		V _R = V _{RRM} , T _{VJ} = 125°C	0.75		1 mA
		I _F = 30 A, T _{VJ} = 25°C			2.7 V
		For power-loss calculations only			1.3 V
		T _{VJ} = 150°C			15 mΩ
		I _F = 50 A, -di _F /dt = 100 A/μs, V _R = 100 V	8		12 A
I _F = 1 A, -di _F /dt = 100 A/μs, V _R = 30 V	40		60 ns		
			0.9 K/W		
			0.3	K/W	
R₂₅ R_{25/50}	NTC T _{VJ} = 25°C	4.75	5.0	5.25 kΩ	
			3375		K

Dimensions in mm
(1 mm = 0.0394")

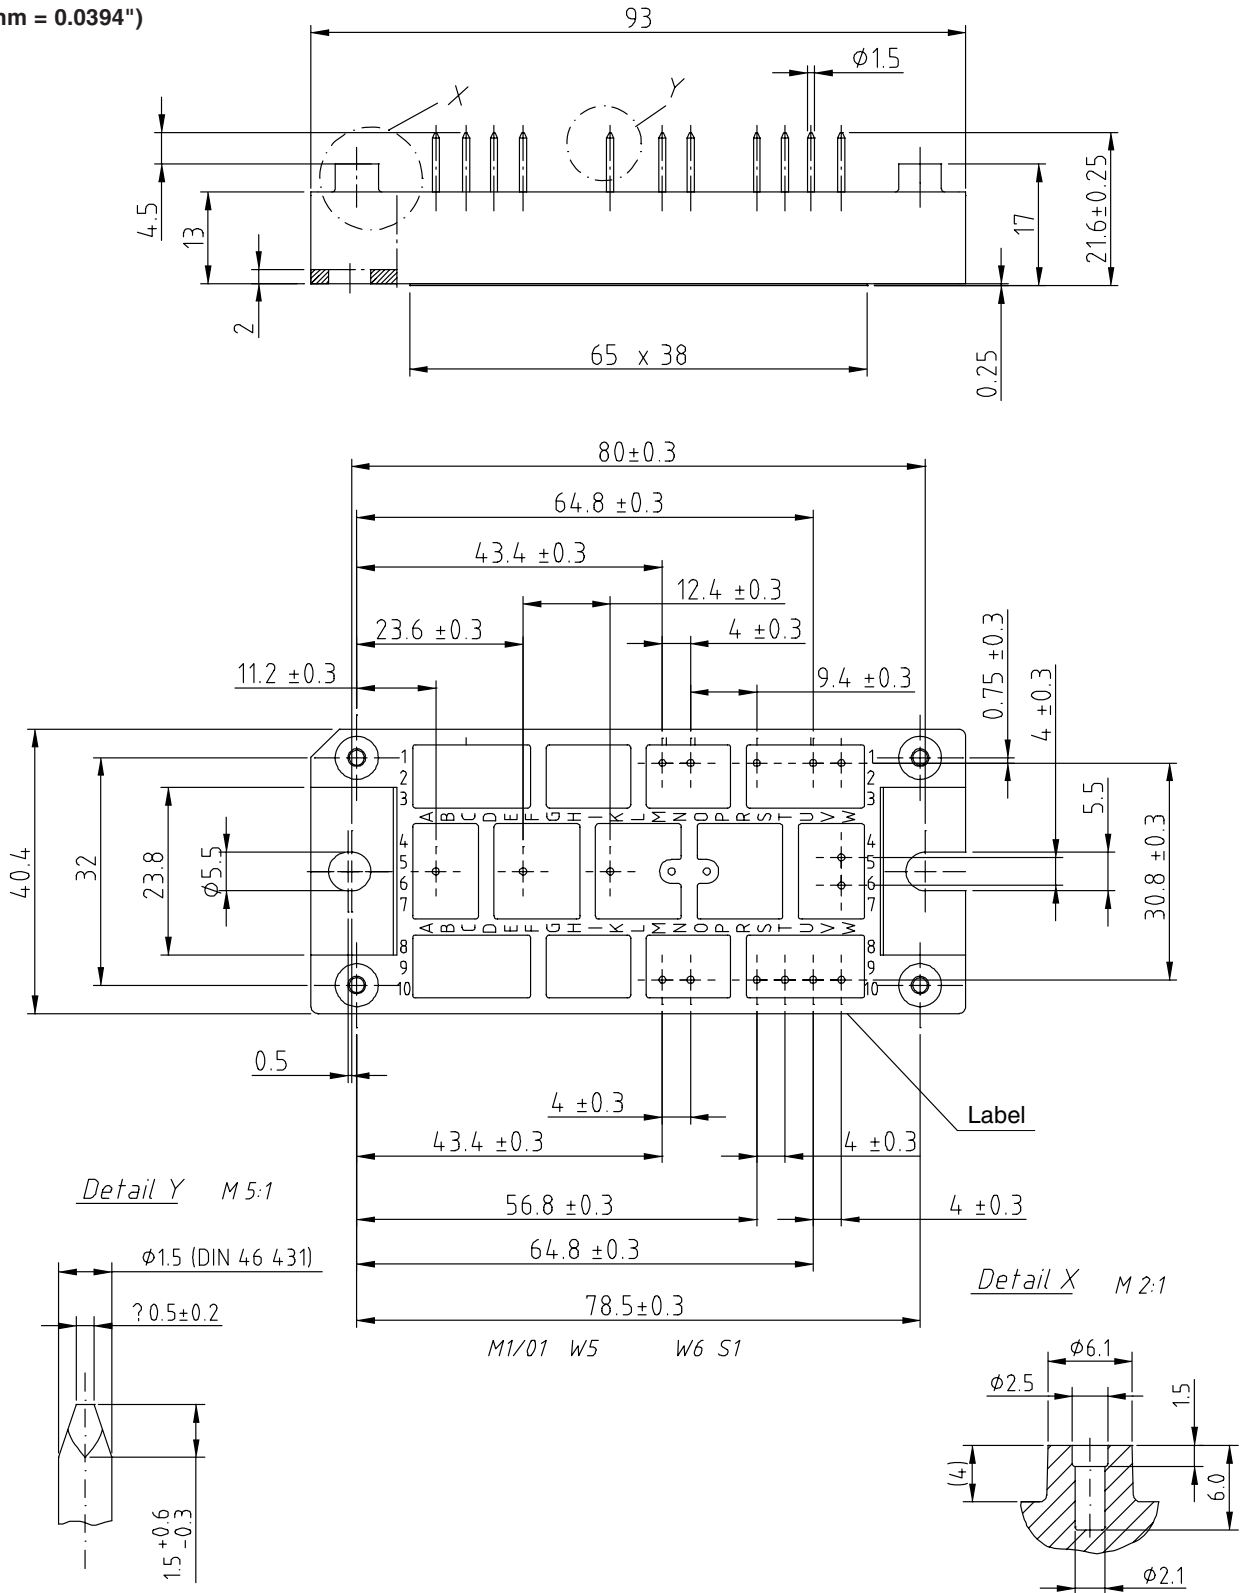

IXYS reserves the right to change limits, test conditions and dimensions.

© 2006 IXYS All rights reserved

0605

3 - 3