





Features

- ✦ UL Recognized File # E-326854
- ✦ Glass passivated junction
- ✦ Ideal for printed circuit board
- ✦ Reliable low cost construction utilizing molded plastic technique
- ✦ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ✦ High surge current capability
- ✦ High temperature soldering guaranteed: 260°C / 10 seconds at 5lbs., (2.3kg) tension
- ✦ Small size, simple installation
- ✦ Green compound with suffix "G" on packing code & prefix "G" on datecode

Mechanical Data

- ✦ Case: Molded plastic body
- ✦ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208
- ✦ Weight: 0.38 grams

DBL

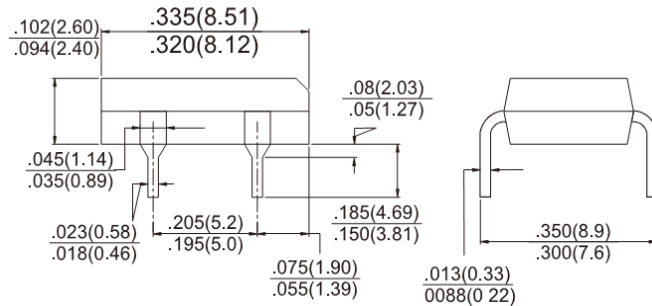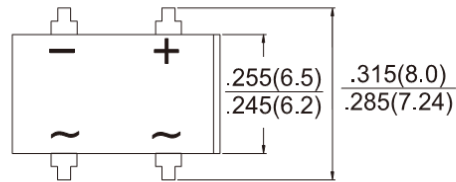

Dimensions in inches and (millimeters)

Marking Diagram



- DBL20XG = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	DBL 201G	DBL 202G	DBL 203G	DBL 204G	DBL 205G	DBL 206G	DBL 207G	DBL 208G	DBL 209G	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	1200	1400	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	840	980	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	1200	1400	V
Maximum Average Forward Rectified Current @ $T_A=40^\circ C$	$I_{F(AV)}$	2.0									A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50									A
Maximum Instantaneous Forward Voltage (Note 1) @2.0A	V_F	1.15							1.30		V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Block Voltage @ $T_A=125^\circ C$	I_R	10					500				μA
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$ $R_{\theta JL}$	40					15				$^\circ C/W$
Operating Temperature Range	T_J	- 55 to + 150									$^\circ C$
Storage Temperature Range	T_{STG}	- 55 to + 150									$^\circ C$

Notes 1: Pulse Test with PW=300 usec, 1% Duty Cycle

Notes 2: Mounted on P.C.B. with 0.4" x 0.4" (10mm x 10 mm) Copper Pads

RATINGS AND CHARACTERISTIC CURVES (DBL201G THRU DBL209G)

FIG. 1 FORWARD CURRENT DERATING CURVE

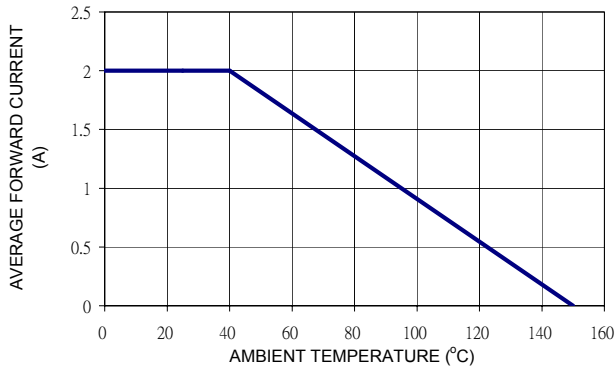


FIG. 2 TYPICAL REVERSE CHARACTERISTICS

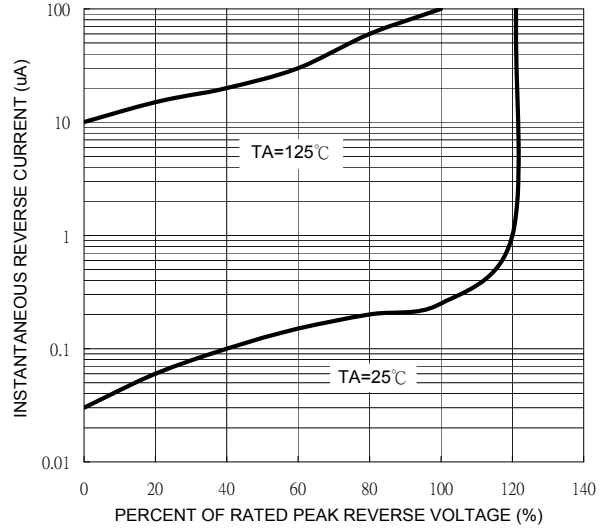


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

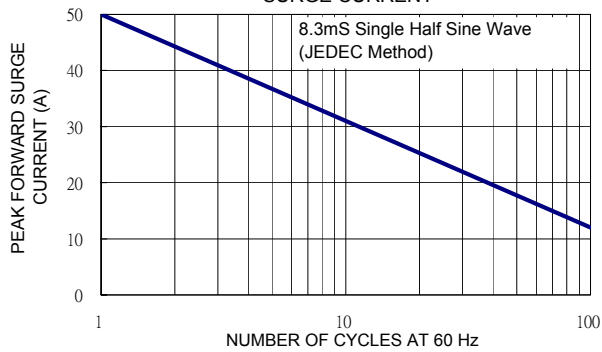


FIG. 4 TYPICAL JUNCTION CAPACITANCE

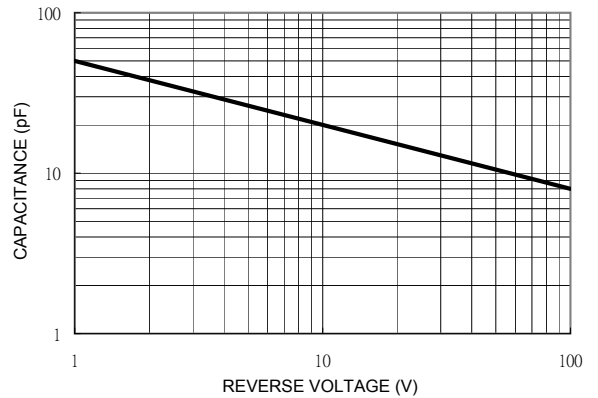


FIG. 5 TYPICAL FORWARD CHARACTERISTICS

