


## VIP-3/SC/FLK64

Order No.: 2315104




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2315104>

VARIOFACE module, with screw connection and flat-ribbon cable plug connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 64-pos.



### Commercial data

|                          |   |
|--------------------------|---|
| GTIN (EAN)               | <br>4 046356 329378 |
| sales group              | I500  |
| Pack                     | 1 pcs.  |
| Customs tariff           | 85369010  |
| Catalog page information | Page 301 (IF-2011)  |

### Product notes

WEEE/RoHS-compliant since:  
11/23/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

|   |            |
|---|------------|
| Nominal voltage $U_N$                     | 60 V AC/DC |
| Max. current carrying capacity per branch | 1 A        |
| Number of positions                       | 64         |
| Width                                     | 118 mm     |

---

|   |                  |
|---|------------------|
| Height                                  | 69 mm            |
| Depth                                   | 62 mm            |
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Mounting position                       | Any              |
| Standards/regulations                   | IEC 60664        |
|   | DIN EN 50178     |
|   | IEC 62103        |
| Pollution degree                        | 2                |
| Surge voltage category                  | II               |

**Connection data**

|  |                     |
|--|---------------------|
| Connection 1                           | PCB connection      |
| Connection in acc. with standard       | IEC / EN            |
| Connection method                      | Screw connection    |
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.     | 4 mm <sup>2</sup>   |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min. | 24                  |
| Conductor cross section AWG/kcmil max  | 12                  |
| Stripping length                       | 8 mm                |
| Screw thread                           | M 3                 |

**Certificates / Approvals**




Certification

CSA

## Diagrams/Drawings

### Circuit diagram

---

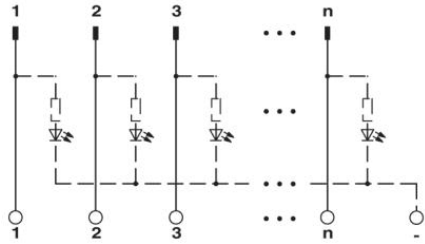

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;