




Features

- ✧ UL Recognized File # E-96005
- ✧ Glass passivated junction
- ✧ Ideal for printed circuit board
- ✧ Reliable low cost construction
- ✧ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ✧ Surge overload rating to 150 amperes peak
- ✧ High temperature soldering guaranteed: 260°C / 10 seconds / .375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 0.3 ounce, 8.0 grams
- ✧ Mounting torque: 5 in. lbs. Max.
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.


KBU401G - KBU407G

Single Phase 4.0 AMPS.
Glass Passivated Bridge Rectifiers

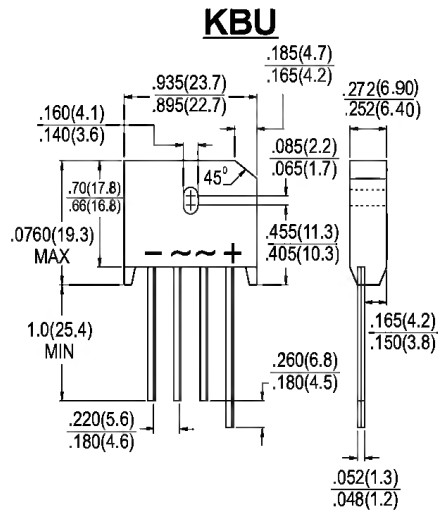

Dimensions in inches and (millimeters)

Marking Diagram



KBU40XG = Specific Device Code
 G = Green Compound
 Y = Year
 WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	KBU	KBU	KBU	KBU	KBU	KBU	KBU	Units
		401G	402G	403G	404G	405G	406G	407G	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ _{T_A} = 50 °C	I(AV)	4.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	IFSM	150							A
Maximum Instantaneous Forward Voltage @ 2.0A @ 4.0A	VF					1.0			V
						1.1			
Maximum DC Reverse Current @ T _A =25 °C at Rated DC Blocking Voltage @ T _A =125 °C	IR					5.0			uA
						500			uA
Typical thermal resistance (Note 1)	RθJA					19			°C/W
(Note 2)	RθJL					4.0			
Operating Temperature Range	TJ	-55 to +150							°C
Storage Temperature Range	TSTG	-55 to +150							°C

Notes: 1. Units Mounted on P.C.B. with 0.5" x 0.5" (12mm x 12mm) Copper Pads and 0.375" (9.5mm) Lead Length.
 2. Units Mounted on a 2.0" x 3.0" x 0.25" Al. Plate.

Version: C09

RATINGS AND CHARACTERISTIC CURVES (KBU401G THRU KBU407G)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

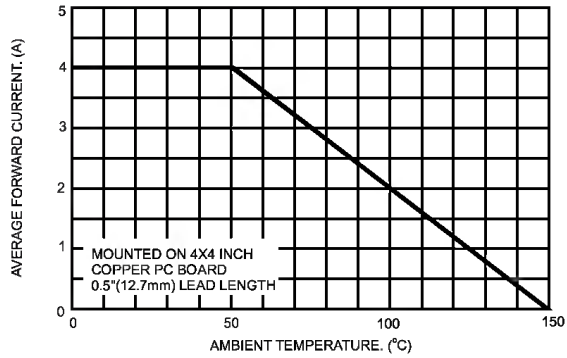


FIG.2- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

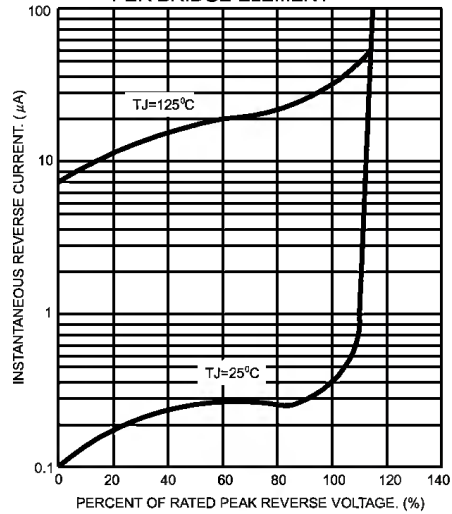


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

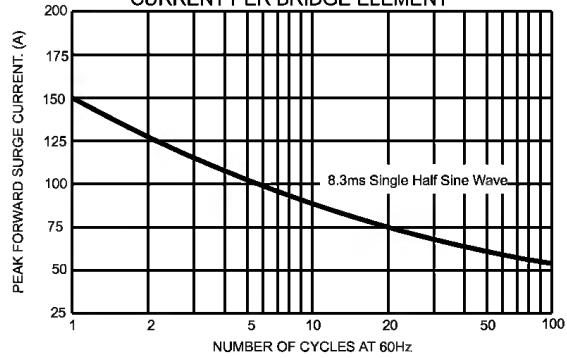


FIG.4- TYPICAL JUNCTION CAPACITANCE

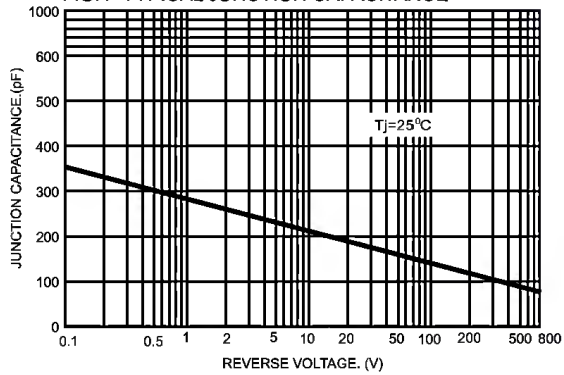


FIG.5- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

