


Surface Mount Transformers/Inductors, Gapped and Ungapped, Custom Configurations Available



ELECTRICAL SPECIFICATIONS

(Multiple winds are connected in parallel)

Inductance Range: 10 μ H to 330 000 μ H, measured at 0.10 V RMS at 10 kHz without DC current, using an HP 4263A or HP 4284A impedance analyzer


DC Resistance Range: 0.03 Ω to 53.7 Ω , measured at + 25 °C \pm 5 °C

Rated Current Range: 3.00 amps to 0.06 amps

Dielectric Withstanding Voltage: 500 V RMS, 60 Hz, 5 seconds



**RoHS
COMPLIANT**

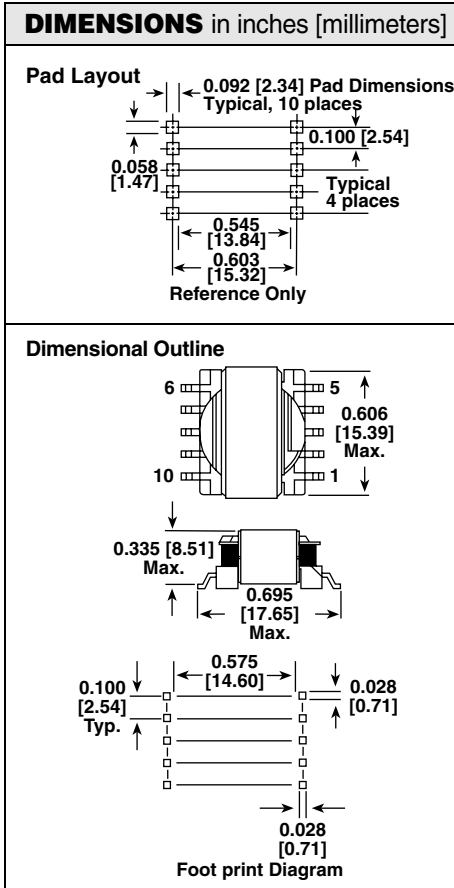


NOTE: Pad layout guidelines per MIL-STD-275E (printed wiring for electronic equipment).
Tolerances: xx \pm 0.01" [\pm 0.25 mm]. xxx \pm 0.005" [\pm 0.12 mm].
The underside of these components contains metal and thus should not come into contact with active circuit traces.

STANDARD ELECTRICAL SPECIFICATIONS						
MODEL	IND. (μ H)	IND. TOL.	SCHEMATIC LETTER	DCR MAX. (Ω)	MAX. RATED* DC CURRENT (Amps)	SATURATING CURRENT** (Amps)
Ungapped Models						
LPE-6562-221NA	220	\pm 30 %	A	0.28	0.90	N/A
LPE-6562-331NA	330	\pm 30 %	A	0.34	0.81	N/A
LPE-6562-471NA	470	\pm 30 %	A	0.40	0.74	N/A
LPE-6562-681NA	680	\pm 30 %	A	0.48	0.67	N/A
LPE-6562-102NA	1000	\pm 30 %	A	0.59	0.61	N/A
LPE-6562-152NA	1500	\pm 30 %	A	0.72	0.55	N/A
LPE-6562-222NA	2200	\pm 30 %	A	0.87	0.50	N/A
LPE-6562-332NA	3300	\pm 30 %	A	1.07	0.45	N/A
LPE-6562-472NA	4700	\pm 30 %	A	1.27	0.41	N/A
LPE-6562-682NA	6800	\pm 30 %	A	1.53	0.38	N/A
LPE-6562-103NA	10 000	\pm 30 %	A	1.86	0.34	N/A
LPE-6562-153NA	15 000	\pm 30 %	A	2.27	0.31	N/A
LPE-6562-223NA	22 000	\pm 30 %	A	8.67	0.16	N/A
LPE-6562-333NA	33 000	\pm 30 %	A	10.6	0.14	N/A
LPE-6562-473NA	47 000	\pm 30 %	A	12.7	0.13	N/A
LPE-6562-683NA	68 000	\pm 30 %	A	15.2	0.12	N/A
LPE-6562-104NA	10 000	\pm 30 %	A	18.5	0.11	N/A
LPE-6562-154NA	150 000	\pm 30 %	A	37.7	0.08	N/A
LPE-6562-224NA	220 000	\pm 30 %	A	45.6	0.07	N/A
LPE-6562-334NA	330 000	\pm 30 %	A	53.7	0.06	N/A
Gapped Models						
LPE-6562-100MB	10	\pm 20 %	B	0.03	3.09	5.055
LPE-6562-150MB	15	\pm 20 %	B	0.04	2.79	4.160
LPE-6562-220MB	22	\pm 20 %	B	0.05	2.26	3.460
LPE-6562-330MB	33	\pm 20 %	B	0.08	1.81	2.840
LPE-6562-470MB	47	\pm 20 %	D	0.12	1.48	2.390
LPE-6562-680MB	68	\pm 20 %	C	0.19	1.20	1.990
LPE-6562-101MB	100	\pm 20 %	D	0.29	0.98	1.650
LPE-6562-151MB	150	\pm 20 %	E	0.45	0.78	1.350
LPE-6562-221MB	220	\pm 20 %	E	0.54	0.71	1.115
LPE-6562-331MB	330	\pm 20 %	E	0.84	0.57	0.912
LPE-6562-471MB	470	\pm 20 %	E	1.24	0.47	0.765
LPE-6562-681MB	680	\pm 20 %	E	1.89	0.38	0.637
LPE-6562-102MB	1000	\pm 20 %	E	2.91	0.31	0.526
LPE-6562-152MB	1500	\pm 20 %	E	4.50	0.25	0.430
LPE-6562-222MB	2200	\pm 20 %	E	6.90	0.20	0.355
LPE-6562-332MB	3300	\pm 20 %	E	10.4	0.16	0.290
LPE-6562-472MB	4700	\pm 20 %	E	15.7	0.13	0.243

* DC current that will create a maximum temperature rise of 30 °C when applied at + 25 °C ambient. ** DC current that will typically reduce the initial inductance by 20 %.
UNGAPPED MODELS: Highest possible inductance with the lowest DCR and highest Q capability. Beneficial in filter, impedance matching and line coupling devices.
GAPPED MODELS: Capable of handling large amounts of DC current, tighter inductance tolerance with better temperature stability than ungapped models. Beneficial in DC to DC converters or other circuits carrying DC currents or requiring inductance stability over a temperature range.

DESCRIPTION													
LPE	6562	1000 μ H	\pm 30 %	A	ER	e2							
MODEL	SIZE	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	CORE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD							
GLOBAL PART NUMBER													
L	P	E	6	5	6	2	E	R	1	0	2	N	T
PRODUCT FAMILY			SIZE			PACKAGE CODE		INDUCTANCE VALUE		TOL.	CORE		

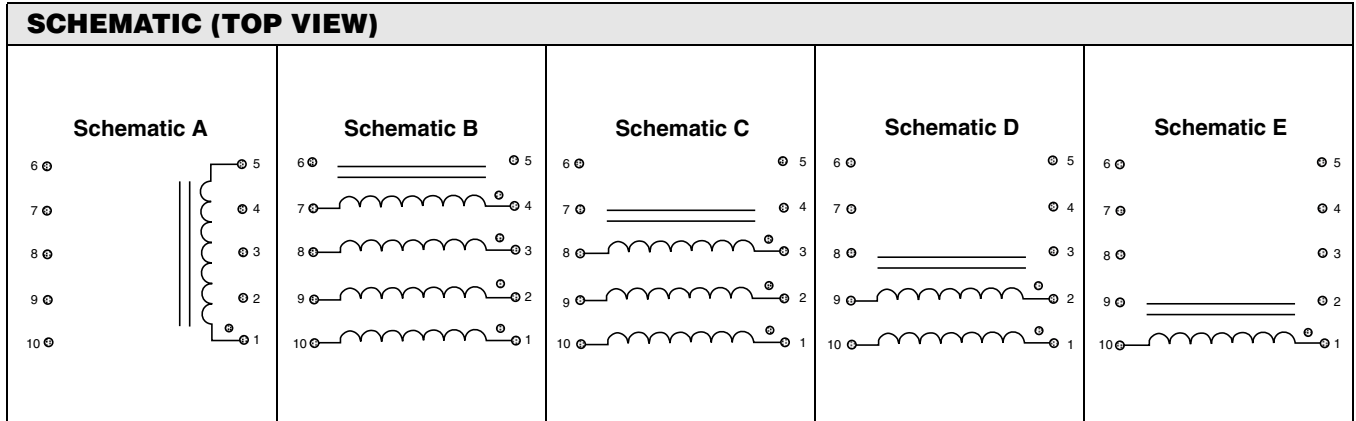

NOTE: Schematic A is for Ungapped LPE Series

ENVIRONMENTAL PERFORMANCE	
TEST	CONDITIONS
Thermal Cycling	Withstands - 55 °C to + 125 °C
Operating Temperature	- 55 °C to + 125 °C*
High Humidity	85 %
Soldering Heat	Tested to + 230 °C
Mechanical Shock	Per MIL-STD-202, Method 213 (100G)
Vibration	Per MIL-STD-202, Method 204 (20G)
Solderability	Per industry standards

* Must be checked in end use application

PART MARKING
<ul style="list-style-type: none"> - Vishay Dale - Date code - Marking code (Suffix of model #) - Pin 1 indicator

PACKAGING

TAPE SPECIFICATIONS:
Carrier Tape Type: Conductive
Cover Tape Type: Anti-static
Cover Tape Adhesion to Carrier: 40 ± 30 grams

REEL SPECIFICATIONS:
Diameter (flange): 13" [330.2 mm]
Maximum Width (over flanges): 1.197" [30.4 mm]

STANDARDS: All embossed carrier tape packaging will be accomplished in compliance with latest revision of EIA-481 "Taping of Surface Mount Components for Automatic Placement".

MODEL	TAPE WIDTH	COMPONENT PITCH	UNITS PER 13 INCH REEL
LPE-6562	32 mm	20 mm	300

Tape and Reel Orientation



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.