

PSC 1,5/ 5-M


Order No.: 1841899

The figure shows a 5-pos. version of the product



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1841899>

Header, Nominal current: 8 A, Number of positions: 5, Pitch: 3.5 mm, Color: green, Assembly: Soldering

Commercial data	
GTIN (EAN)	 4 017918 111878
sales group	E150
Pack	50 pcs.
Customs tariff	85369010
Catalog page information	Page 343 (CC-2011)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions	
Length	20.8 mm
Pitch	3.5 mm
Dimension a	14 mm
Number of positions	5

Technical data

Range of articles	PSC 1,5/..-M
Insulating material group	I
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Nominal voltage U_N	250 V
Insulating material	PA
Inflammability class acc. to UL 94	V0
Color	Green
Nominal voltage, UL/CUL Use Group B	300 V
Nominal current, UL/CUL Use Group B	8 A
Nominal voltage, UL/CUL Use Group D	300 V
Nominal current, UL/CUL Use Group D	8 A

Certificates / Approvals

Certification


CSA, CUL, GOST, UL

Additional products



Item	Designation	Description
General		
1841912	PSC 1,5/ 5-F	Plug component, Nominal current: 8 A, Number of positions: 5, Pitch: 3.5 mm, Connection method: Screw connection, Color: green

Diagrams/Drawings

Drilling plan/solder pad geometry

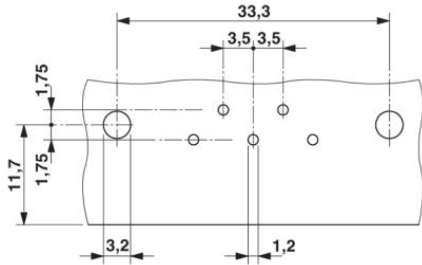


Dimensioned drawing

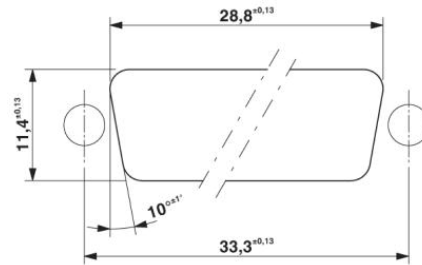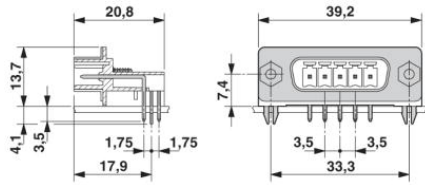

Panel cutout in acc. with DIN 41652-3 for wall up to 2.0 mm thick

Panel cutout in acc. with DIN 41652-3 for wall up to 4.5 mm thick

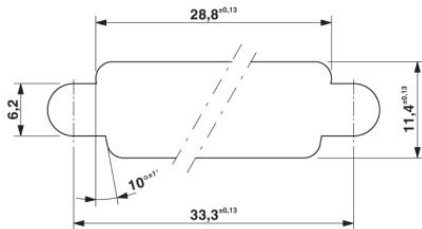

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;